

PERFORMER HEAVY LIFT SWIVEL HOIST RING


SAFETY FACTOR 4:1 ALL DIRECTIONS · 360° ROTATION / 180° PIVOT · M33 TO M100 · WLL TO 70,700 LBS.



A heavy lift swivel hoist ring for anchoring and lifting large loads. The bail rotates a full 360° and pivots 180°, so it aligns with the direction of pull instead of being side loaded — suited to turning, up-ending and off-centre lifts on moulds, dies and machinery. Rated with a safety coefficient of 4 in **all** loading directions.

BENEFITS & FEATURES

- **Safety coefficient 4** in all loading directions
- Bail rotates **360°** and pivots **180°** to align with the pull
- Ideal for fastening at 90°
- Captive screws — cannot be lost in service
- Screws take universal hexagonal keys
- Tested 100% by magnaflux
- Tested to **EN 1677**; complies with Machinery Directive 2006/42/EC
- Non-standard threading and stem lengths available on request

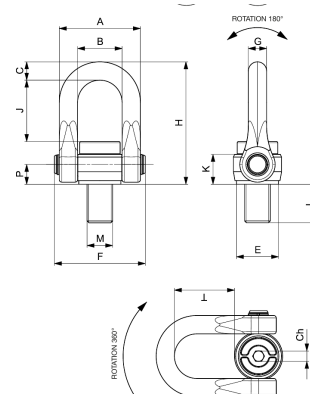

⚠ **The device is not suitable for rotation while under load.** Position the bail to align with the direction of pull **before** applying load. Seat the ring flush and square against the load with full thread engagement, and tighten to the torque shown. Never exceed the rated working load limit for the loading direction in use.

DIMENSIONS & WEIGHTS

PART NO.	THREAD (M)	UNC OPTION	WLL (LBS.)	DIMENSIONS (IN.)														WEIGHT (LBS.)
				A	B	C	E	F	G	H	J	K	L	P	T	CH		
C813X33	M33	—	23,140	5.16	2.80	1.18	2.72	5.87	1.18	7.83	3.94	1.93	1.97	1.28	3.82	0.67	12.3	
C813X36	M36	1-1/2" - 6	26,450	5.16	2.80	1.18	2.72	5.87	1.18	7.83	3.94	1.93	2.13	1.28	3.82	0.67	12.8	
C813X39	M39	—	30,860	5.16	2.80	1.18	2.72	5.87	1.18	7.83	3.94	1.93	2.28	1.28	3.82	0.67	13.0	
C813X42	M42	1-3/4" - 5	33,060	5.16	2.80	1.18	2.72	5.87	1.18	7.83	3.94	1.93	2.48	1.28	3.82	0.67	13.2	
C813X45	M45	—	35,270	5.16	2.80	1.18	2.72	5.87	1.18	7.83	3.94	1.93	2.48	1.28	3.82	0.67	13.4	
C813X48	M48	2" - 4.5	44,090	6.46	3.62	1.57	3.50	7.17	1.57	9.80	4.80	2.48	2.68	1.57	4.69	0.75	25.6	
C813X52	M52	—	46,290	6.46	3.62	1.57	3.50	7.17	1.57	9.80	4.80	2.48	2.68	1.57	4.69	0.75	26.0	
C813X56	M56	2-1/2" - 4	55,110	6.46	3.62	1.57	3.50	7.17	1.57	9.80	4.80	2.48	3.07	1.57	4.69	0.75	26.7	
C813X64	M64	—	70,760	6.46	3.62	1.57	3.50	7.17	1.57	9.80	4.80	2.48	3.54	1.57	4.69	0.75	28.4	
C813X72	M72	—	55,110	6.46	3.62	1.57	3.50	7.17	1.57	9.80	4.80	2.48	3.07	1.57	4.69	0.75	33.3	
C813X80	M80	—	70,760	6.46	3.62	1.57	3.50	7.17	1.57	9.80	4.80	2.48	3.54	1.57	4.69	0.75	35.1	
C813X90	M90	—	70,760	6.46	3.62	1.57	3.50	7.17	1.57	9.80	4.80	2.48	3.54	1.57	4.69	0.75	37.3	
C813X100	M100	—	70,760	6.46	3.62	1.57	3.50	7.17	1.57	9.80	4.80	2.48	3.54	1.57	4.69	0.75	37.3	

WORKING LOAD LIMITS BY LOADING DIRECTION (LBS.)

PART NO.	0° VERTICAL		90°		2 LEGS			3 & 4 LEGS			MAX TIGHTENING TORQUE (NM)
	1 LEG	2 LEGS	1 LEG	2 LEGS	0-45°	45-60°	ASYM.	0-45°	45-60°	ASYM.	
C813X33	31,960	63,930	23,140	46,290	32,400	23,140	23,140	48,500	34,720	23,140	600
C813X36	33,060	66,130	26,450	52,910	37,030	26,450	26,450	55,550	39,680	26,450	814
C813X39	37,470	74,950	30,860	61,720	43,210	30,860	30,860	64,810	46,290	30,860	814
C813X42	35,270	70,540	33,060	66,130	46,290	33,060	33,060	69,440	49,600	33,060	1304
C813X45	35,270	70,540	35,270	70,540	49,380	35,270	35,270	74,070	52,910	35,270	1670
C813X48	48,500	97,000	44,090	88,180	61,720	44,090	44,090	92,590	66,130	44,090	1981
C813X52	50,700	101,410	46,290	92,590	64,810	46,290	46,290	97,220	69,440	46,290	1981
C813X56	55,110	110,230	55,110	110,230	77,160	55,110	55,110	115,740	82,670	55,110	3000
C813X64	70,760	141,530	70,760	141,530	99,070	70,760	70,760	148,590	106,260	70,760	4738
C813X72	55,110	110,230	55,110	110,230	77,160	55,110	55,110	115,740	82,670	55,110	4738
C813X80	70,760	141,530	70,760	141,530	99,070	70,760	70,760	148,590	106,260	70,760	4738
C813X90	70,760	141,530	70,760	141,530	99,070	70,760	70,760	148,590	106,260	70,760	4738
C813X100	70,760	141,530	70,760	141,530	99,070	70,760	70,760	148,590	106,260	70,760	4738

Working load limits and dimensions converted from the manufacturer's published metric values; WLL rounded down to the nearest 10 lbs., dimensions to the nearest 0.01", weights to 0.1 lb. Safety coefficient 4 in all loading directions. Tested to EN 1677 and 100% magnaflux inspected; complies with Machinery Directive 2006/42/EC. Tightening torque given in Newton-metres as published. Non-standard threading and stem lengths available on request. Imported.

CALL FOR SIZING, UNC THREADS & APPLICATION SUPPORT

866-848-2032 · murphylift.com · Swivel hoist rings, lifting points & Grade 100 fittings in stock