


ALLOY STEEL J-HOOKS — EYE STYLE A

MADE IN USA · WELDED EYE · ASME B30.20 & OSHA · Ø 1/4" TO 1" · WLL 100 TO 2,600 LBS.

BENEFITS & FEATURES

- ±4% on dimensions
- Custom designs available — call for engineering
- **All eyes welded unless otherwise specified**
- Manufactured to exceed all ASME B30.20 and OSHA regulations
- Corrosion resistant finish
- Durable construction ideally suited to jobsite or warehouse use
- Made in U.S.A.
- **Maximum use temperature is 400°F**

⚠ Prop 65 — see Page 112. Dimensions are subject to ±4% tolerance. Do not exceed the rated working load limit or a use temperature of 400°F.

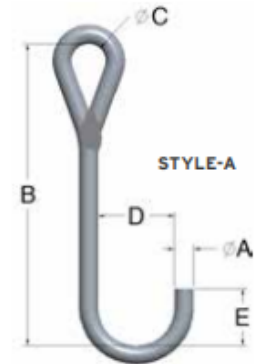

STANDARD ALLOY STYLE A STEEL J-HOOKS — B (LENGTH)

Material Ø A (in.)*		B — Length (in.)								Dimensions (in.)
		5"	6"	7"	8"	9"	10"	12"	14"	
Ø 1/4" WLL 100 lbs.	Part Number	11621-5	11621-6	11621-7	11621-8	11621-9	11621-10	11621-12	11621-14	C = 1.00 D = 1.25 E = 0.87
	Weight (lbs.)	0.14	0.9	0.9	0.9	0.9	1	1	1	
Ø 5/16" WLL 250 lbs.	Part Number	11622-5	11622-6	11622-7	11622-8	11622-9	11622-10	11622-12	11622-14	C = 1.00 D = 1.25 E = 0.87
	Weight (lbs.)	0.21	0.9	0.9	0.9	0.9	1	1	1	
Ø 3/8" WLL 365 lbs.	Part Number	11623-5	11623-6	11623-7	11623-8	11623-9	11623-10	11623-12	11623-14	C = 1.00 D = 1.50 E = 1.12
	Weight (lbs.)	1.1	0.37	1.1	1.1	1.1	1.3	1.3	1.3	
Ø 1/2" WLL 650 lbs.	Part Number	11624-5	11624-6	11624-7	11624-8	11624-9	11624-10	11624-12	11624-14	C = 1.00 D = 2.00 E = 1.50
	Weight (lbs.)	1.5	1.5	1.5	0.83	1.6	1.7	1.7	1.8	
Ø 5/8" WLL 1,000 lbs.	Part Number	11625-5	11625-6	11625-7	11625-8	11625-9	11625-10	11625-12	11625-14	C = 1.00 D = 2.50 E = 1.87
	Weight (lbs.)	1.9	1.9	1.9	2	1.5	2	2.1	2.2	
Ø 3/4" WLL 1,450 lbs.	Part Number		11626-6	11626-7	11626-8	11626-9	11626-10	11626-12	11626-14	C = 1.00 D = 3.00 E = 2.25
	Weight (lbs.)		2.3	2.3	2.3	2.4	2.34	2.5	2.6	
Ø 7/8" WLL 1,900 lbs.	Part Number				11627-8	11627-9	11627-10	11627-12	11627-14	C = 1.00 D = 3.50 E = 2.62
	Weight (lbs.)				2.7	2.8	2.9	3.8	3.2	
Ø 1" WLL 2,600 lbs.	Part Number						11628-10	11628-12	11628-14	C = 1.25 D = 4.00 E = 3.00
	Weight (lbs.)						3	3.3	5.75	

*Larger capacities and custom configurations available — please call for ordering assistance. Shaded cells indicate the length is not offered in that material diameter. All eyes welded unless otherwise specified. Dimensions ±4%. Manufactured to exceed ASME B30.20 and OSHA regulations.

CALL FOR CUSTOM DESIGNS & ENGINEERING

866-848-2032 · murphylift.com · Larger capacities & custom configurations available