

GRADE 100 SWIVEL LIFTING POINTS — UNC

ALLOY STEEL · 360° SWIVEL / 180° PIVOT · UNC 5/16" TO 2" · WLL 660 TO 26,450 LBS.




Grade 100 swivel lifting points bolt directly into a tapped hole to provide a rotating attachment for chain slings and lifting gear. The bail swivels a full 360° and pivots 180°, so it aligns itself with the direction of pull rather than being side loaded — making it suited to turning, up-ending and off-centre lifts.

BENEFITS & FEATURES

- **Grade 100 alloy steel**, heat treated and 100% proof loaded
- Bail swivels **360°** and pivots **180°** to align with the direction of pull
- Rated for angular loading — no capacity reduction when correctly aligned
- Available with or without locking key (C-suffix codes include the key)
- UNC threads from 5/16" through 2"
- Individually marked with size, WLL and traceability code

DIMENSION REFERENCE

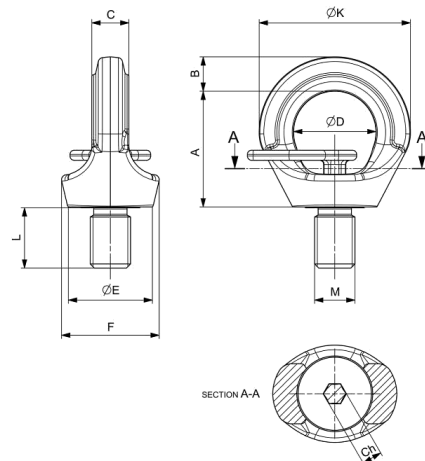

△ Seat the lifting point flush and square against the load, with full thread engagement and the correct tightening torque. Position the bail so it aligns with the direction of pull before applying load — never load against a fixed bail. Inspect before each use and remove from service if the bail, bolt or ring is bent, worn or damaged.

PART NUMBERS, CAPACITIES & DIMENSIONS

PART NO. WITHOUT KEY	PART NO. WITH KEY	THREAD SIZE (UNC)	WLL (LBS.)	DIMENSIONS (IN.)									WEIGHT (LBS.)
				A	B	C	ØD	ØE	F	ØK	L	CH	
C807XHT08U	C807XCHT08U	5/16" - 18	660	1.38	0.43	0.35	0.98	0.98	1.18	1.85	0.47	0.24	0.26
C807XHT10U	C807XCHT10U	3/8" - 16	880	1.38	0.43	0.35	0.98	0.98	1.18	1.85	0.63	0.24	0.26
C807XHT12U	C807XCHT12U	1/2" - 13	1,650	1.69	0.49	0.45	1.18	1.18	1.44	2.19	0.71	0.28	0.44
C807XHT16U	C807XCHT16U	5/8" - 11	3,300	1.95	0.57	0.62	1.38	1.38	1.65	2.54	0.94	0.31	0.77
C807XHT20U	C807XCHT20U	3/4" - 10	5,070	2.28	0.63	0.71	1.57	1.65	2.03	2.93	1.18	0.39	1.32
C807XHT22U	C807XCHT22U	7/8" - 9	5,070	2.28	0.63	0.71	1.57	1.65	2.03	2.93	1.18	0.39	1.32
C807XHT24U	C807XCHT24U	1" - 8	7,050	2.72	0.81	0.87	1.93	1.97	2.28	3.54	1.42	0.47	2.20
C807XHT30U	C807XCHT30U	1 1/4" - 7	9,920	3.39	1.00	1.10	2.36	2.60	2.87	4.37	1.69	0.67	4.41
C807XHT36U	C807XCHT36U	1 1/2" - 6	15,430	4.21	1.26	1.26	2.91	2.95	3.80	5.31	2.13	0.87	7.50
C807XHT42U	C807XCHT42U	1 3/4" - 5	19,840	4.72	1.50	1.59	3.23	3.35	4.33	6.22	2.52	0.94	12.57
C807XHT48U	C807XCHT48U	2" - 4,5	26,450	5.47	1.69	1.73	3.74	3.94	4.90	7.05	2.83	1.06	18.74

Grade 100 alloy steel, heat treated. Working load limits and dimensions converted from the manufacturer's metric published values; WLL rounded down to the nearest 10 lbs. and dimensions to the nearest 0.01". Part numbers beginning C807XC are supplied with the locking key. Imported.

APPLICATIONS

- Mould & die handling
- Machine & fixture lifting
- Turning and up-ending loads
- Multi-leg chain sling attachment
- Maintenance & installation rigging
- Off-centre and awkward loads

HOW TO ORDER

- Specify part number and thread size
- Add the C-suffix code for the locking key version
- Metric thread versions available on request
- Grade 100 chain slings & fittings available to match
- Call for torque values and installation guidance

CALL FOR SIZING & APPLICATION SUPPORT

866-848-2032 · murphylift.com · Grade 100 chain, hooks & lifting points in stock