


3 STRAND TWISTED YELLOW POLYPROPYLENE ROPE

U.V. STABILIZED · FLOATS · ROT & MILDEW RESISTANT · 3/16" TO 2" · BREAK STRENGTH 720 TO 46,800 LBS.

Premium grade U.V. stabilized polypropylene fiber rope that floats. A strong, lightweight and versatile rope, resistant to rot, mildew and petroleum products.

BENEFITS & FEATURES

- Premium grade, **U.V. stabilized** polypropylene fiber
- **Floats** — ideal for marine and water applications
- Strong, lightweight and versatile
- Resistant to rot, mildew and petroleum products
- Three strand twisted construction
- Bright yellow for high visibility
- Spliceable — holds knots and splices well
- Available on spools from 300 to 6,000 ft.

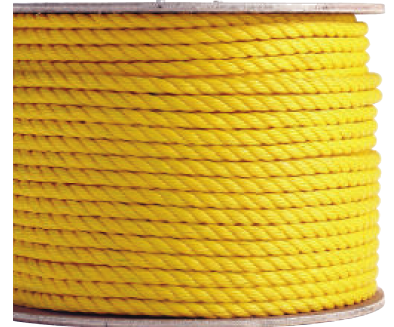

SIZES, STRENGTHS & PACKAGE WEIGHTS

DIAMETER (IN.)	MINIMUM BREAK STRENGTH (LBS.)	APPROX. DENSITY (LBS./100 FT.)	LENGTH (FT.)	APPROX. PACKAGE WEIGHT (LBS.)
3/16"	720	0.7	600	4.2
			1,200	8.4
			6,000	42.0
1/4"	1,250	1.2	300	3.6
			600	7.2
			1,200	14.4
			2,400	28.8
			5,000	60.0
5/16"	1,710	1.8	600	10.8
			1,200	21.6
3/8"	2,440	2.8	300	8.4
			600	16.8
			1,200	33.6
			2,400	67.2
			3,600	100.8
1/2"	3,780	4.7	300	14.1
			600	28.2
			1,200	56.4
			2,400	112.8
5/8"	5,600	7.5	600	45.0
			1,200	90.0
3/4"	7,650	10.7	300	32.1
			600	64.2
			1,200	128.4
1"	12,600	18.0	600	108.0
			1,200	216.0
1-1/4"	18,900	27.0	600	162.0
1-1/2"	26,800	38.0	600	230.0
2"	46,800	69.0	600	414.0

Minimum break strength and density are nominal values for new rope and are not working load limits. Working load must be reduced to allow for the conditions of use, including shock loading, sustained loading, abrasion and knots. Polypropylene rope is not recommended for overhead lifting.

CALL FOR CUT LENGTHS & BULK PRICING

866-848-2032 · murphylift.com · Custom spool lengths & other rope constructions available