

PUSH & GEARED TROLLEYS


PT & GT SERIES · ½ TO 30 METRIC TON CAPACITY · LOW HEADROOM · ASME B30.16 · ATEX RATED

THE EASIEST TROLLEY INSTALLATION EVER

- ½ to 5t installation and adjustment by rotating the threaded hanger shaft
- 10–30t installation from one side — hanger shafts are fixed mounted to the opposite side plate
- Trolleys up to 5t have a **5:1 design factor** for use with powered or manual hoist
- Trolleys 10t and greater have a **4:1 design factor** and must be derated for use with powered hoist
- Machined cast iron wheels with universal tread designed to fit flat or tapered beam flanges
- Low headroom design with precision sealed “lubed for life” bearings assure smooth operation
- Durable all steel construction with standard safety lugs
- Geared trolley hand chain comes standard with 20 feet of drop
- Meets ASME/ANSI B30.16, OSHA, NASA-STD-8719.9 and EU Directive 2006/42/EC
- ATEX rated II 3 GD c IIB 54°C X for limited use in hazardous environments

Options: Extended hand chain drop (standard is 20 ft.) · Wide flange kits for ½–5t with 12” flange adjustment, ordered separately.

⚠ Before using these products, read and follow the instructions in the operator’s manual. Never exceed capacity. Do not use for lifting people or loads over people.

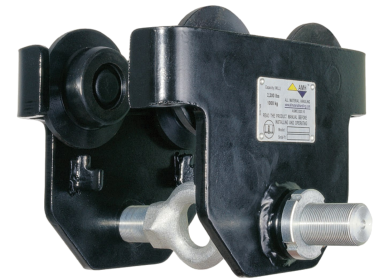

Push Trolley (PT)



Geared Trolley (GT)

WIDE FLANGE KIT — SPECIFICATIONS & DIMENSIONS

WLL	FOR MODEL	TROLLEY W/KIT WEIGHT (LBS.)	B W/KIT (IN.)	C W/KIT (IN.)	SHAFT KIT WEIGHT (LBS.)	WIDE SHAFT KIT (ORDER SEPARATELY)
½t	PT005	19.1	14.8	6.30–12.01	5.1	PT005-FLG-12
1t	PT010	25.1	15.2	6.30–12.01	6.0	PT010-FLG-12
1t	GT010	36.1	15.2	6.30–12.01	6.0	PT010-FLG-12
2t	PT020	42.2	15.6	6.30–12.01	9.0	PT020-FLG-12
2t	GT020	53.2	15.6	6.30–12.01	9.0	PT020-FLG-12
3t	PT030	72.6	16.1	6.30–12.01	12.8	PT030-FLG-12
3t	GT030	85.6	16.1	6.30–12.01	12.8	PT030-FLG-12
5t	PT050	97.8	16.3	6.30–12.01	17.9	PT050-FLG-12
5t	GT050	111.8	16.3	6.30–12.01	17.9	PT050-FLG-12


Wide flange kits provide 12” flange adjustment and are ordered separately. Dimensions in inches, weights in pounds. See the dimension drawings and full specifications on the following page.

CALL FOR SIZING & APPLICATION SUPPORT

866-848-2032 · murphylift.com · Hoists, beam clamps & below-the-hook attachments also available


PUSH & GEARED TROLLEYS – SPECIFICATIONS

PT & GT SERIES • DIMENSIONS IN INCHES, WEIGHTS IN POUNDS • ½ TO 30 METRIC TON

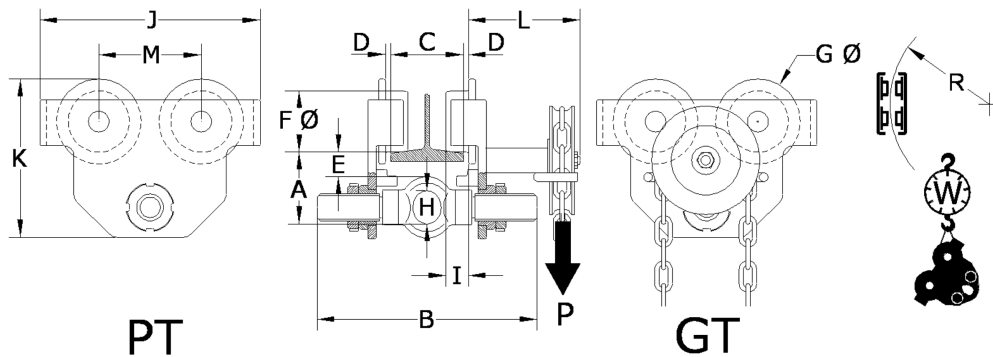

½ TO 5 METRIC TON – PT & GT SERIES SPECIFICATIONS & DIMENSIONS

BASE MODEL	WLL (5:1)	A	B1	B2	STANDARD C1	WIDE FLG KIT C2	D	E	F	G	H	I	J	K	L	M	P* (LBS.)	R MIN	W1 (LBS.)	W2 (LBS.)
PT005	1/2t	3.3	11.5	14.8	1.97-8.66	6.30-12.01	0-0.12	1.5	2.3	3.4	1.2	0.9	8.9	6.8	—	4.0	—	36	18	19
PT010	1t	3.7	11.8	15.2	2.28-8.66	6.30-12.01	0-0.12	1.7	2.4	3.7	1.4	0.9	9.9	7.4	—	4.8	—	40	24	25
GT010-20	1t	3.7	11.8	15.2	2.28-8.66	6.30-12.01	0-0.12	1.7	2.4	3.7	1.4	0.9	9.9	7.4	4.5	4.8	18	40	35	36
PT020	2t	4.4	12.2	15.6	2.60-8.66	6.30-12.01	0-0.12	1.6	3.2	4.6	1.9	1.0	11.8	8.9	—	5.5	—	48	40	42
GT020-20	2t	4.4	12.2	15.6	2.60-8.66	6.30-12.01	0-0.12	1.6	3.2	4.6	1.9	1.0	11.8	8.9	4.5	5.5	34	48	52	53
PT030	3t	5.8	12.8	16.1	2.91-8.66	6.30-12.01	0-0.12	2.5	3.9	5.5	2.3	1.3	14.2	11.4	—	6.3	—	52	69	72
GT030-20	3t	5.8	12.8	16.1	2.91-8.66	6.30-12.01	0-0.12	2.5	3.9	5.5	2.3	1.3	14.2	11.4	5.3	6.3	27	52	83	85
PT050	5t	6.3	13.0	16.3	3.54-8.66	6.30-12.01	0-0.12	2.2	4.3	5.9	2.8	1.5	15.4	12.3	—	6.7	—	56	94	97
GT050-20	5t	6.3	13.0	16.3	3.54-8.66	6.30-12.01	0-0.12	2.2	4.3	5.9	2.8	1.5	15.4	12.3	5.4	6.7	36	56	108	111

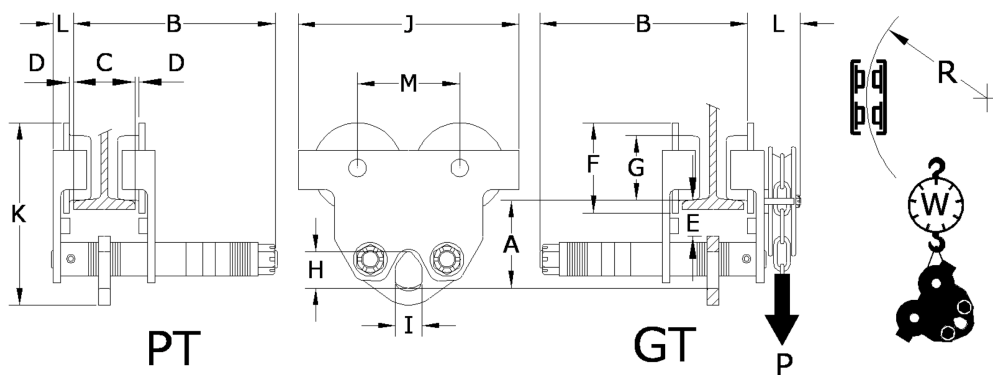

10 TO 30 METRIC TON – PT & GT SERIES SPECIFICATIONS

BASE MODEL	WLL (4:1)	A	B	C	D	E	F	G	H	I	J	K	L	M	EFFORT P (LBS.)	R MIN	W (LBS.)
PT100	10t	7.5	15.5	4.9-12	0.08-0.13	1.8	7.0	5.4	4.4	2.8	18.1	15.5	1.8	7.9	—	79	198
GT100-20	10t	7.5	15.5	4.9-12	0.08-0.13	1.8	7.0	5.4	4.4	2.8	18.1	15.5	4.3	7.9	54	79	207
PT160	16t	9.3	17.1	5.4-12	0.08-0.13	2.4	8.9	6.6	5.4	3.7	22.6	19.6	3.0	10.7	—	138	427
GT160-20	16t	9.3	17.1	5.4-12	0.08-0.13	2.4	8.9	6.6	5.4	3.7	22.6	19.6	6.0	10.7	54	138	447
GT200-20	20t	9.2	17.1	5.4-12	0.08-0.13	2.3	8.9	6.9	5.4	3.7	22.6	19.6	6.0	10.7	56	138	458
GT300-20	30t	11.2	17.8	6.9-12	0.08-0.13	2.7	11.2	9.1	6.1	4.1	28.7	24.4	6.2	13.5	56	236	848

* Effort. Dimensions in inches, weights in pounds. Trolleys up to 5t carry a 5:1 design factor; 10t and larger carry a 4:1 design factor and must be derated for use with a powered hoist. Geared trolleys are supplied with 20 ft. of hand chain drop as standard.