


BOLTABLE LIFTING POINTS – VLBG-PLUS / VLBG

METRIC THREAD • WLL: 0.63 TO 20 METRIC TONS • 360° SWIVEL • 180° PIVOT


VLBG-PLUS – METRIC (12 SIZES)

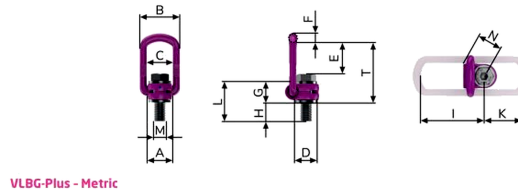

TYPE	WLL (T)	WT. (KG)	T	A	B	C	D	E	F	G	H	I	K	L	M	TORQUE (NM)
0.63t M8	0.63	0.3	75	30	52	34	24	40	10	29	11	75	45	40	M8	30
0.9t M10	0.9	0.32	75	30	54	34	24	39	10	29	15	75	45	44	M10	60
1.35t M12	1.35	0.33	75	32	54	34	26	38	10	29	18	75	45	47	M12	150
2t M16	2	0.55	85	33	56	36	30	39	13.5	36	22	86	47	58	M16	150
3.5t M20	3.5	1.3	110	50	82	54	45	55	16.5	43	32	113	64	75	M20	400
4.5t M24	4.5	1.5	125	50	82	54	45	67	18	43	37	130	78	80	M24	760
6.7t M30	6.7	3.3	147	60	103	65	60	67	22.5	61	49	151	80	110	M30	1000
7t M36	7	3.4	146	60	103	65	60	74	22.5	55	52	151	80	107	M36	700
8t M36	8	6.2	196	77	122	82	70	97	26.5	77	63	205	113	140	M36	800
10t M42	10	6.7	196	77	122	82	70	94	26.5	77	73	205	113	150	M42	1000
15t M42	15	10.9	222	95	156	100	85	109	36	87	63	230	130	150	M42	1500
20t M48	20	11.6	222	95	156	100	95	105	36	87	73	230	130	150	M48	2000

All dimensions in mm. Subject to technical changes.

VLBG – METRIC, VARIABLE LENGTH (4 SIZES)

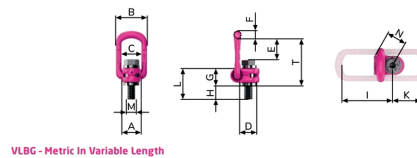

TYPE	WLL (T)	T	A	B	C	D	E	F	G	H VARIO	I	K	L VARIO	M	TORQUE (NM)
1.2t M14	1.2	85	33	56	36	30	39	13.5	36	14-129	86	47	50-165	M14	120
2t M18	2	110	50	82	54	45	55	16.5	43	18-27	113	64	61-70	M18	200
2.5t M22	2.5	110	50	82	54	45	54	16.5	43	22-57	113	64	65-100	M22	250
4t M27	4	147	60	103	65	60	59	22.5	61	27-329	151	80	88-300	M27	400

All dimensions in mm. Weight depends on design. Subject to technical changes.

FEATURES

- 360° swivel under load
- 180° pivot range
- Metric thread sizes M8 through M48
- High-strength alloy steel
- Fatigue rated & proof tested
- VLBG offers variable bolt lengths

APPLICATIONS

- Machinery & mold lifting
- Steel fabrication & erection
- Heavy equipment rigging
- Multi-point lifts
- Permanent & semi-permanent installations

FROM COMMON TO CUSTOM – WE DO IT ALL

866-848-2032 • murphylift.com • 80% of orders ship same day • Free shipping on orders \$50+