

IMPORT GALVANIZED SCREW PIN ANCHOR SHACKLES

HOT-DIP GALVANIZED • DROP-FORGED CARBON STEEL • WLL 3/4-85 TONS • FED. SPEC RR-C-271F



FEATURES

- Drop-forged carbon steel, heat treated
- Hot-dip galvanized finish
- Hex-head machined screw pin
- Alloy steel pin
- Permanently marked with size & WLL
- 15 sizes — 5/16" through 3"
- Quench & tempered for consistent strength
- Meets Federal Spec RR-C-271F Type IVA


⚠ Never exceed rated capacity. Screw pin shackles are NOT for applications where the pin can rotate, side-loading, or long-term/permanent installations — specify bolt-type for those uses. Inspect before every use.

RR-C-271F
FEDERAL SPEC

TYPE IVA
GRADE A, CLASS 3

SCREW PIN
HEX-HEAD CLOSURE

DIMENSION REFERENCE

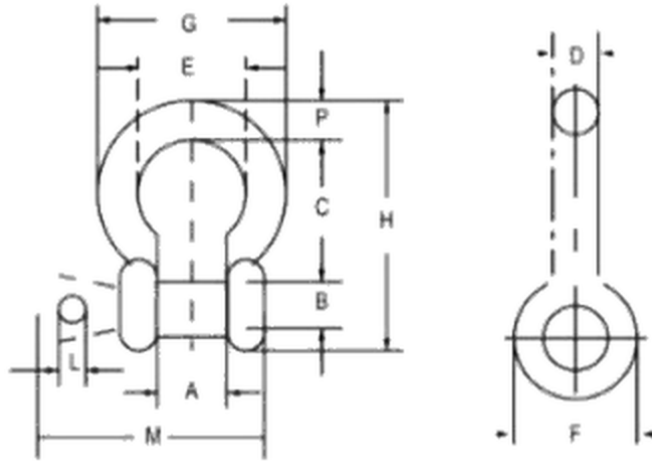

HOW TO ORDER

By **nominal size and WLL**. Specify quantity and finish (galvanized standard). Specify **bolt type** if pin rotation or long-term installation is required.

APPLICATIONS

Temporary lifting & rigging, construction & hoisting, block & tackle, quick connect/disconnect, tie-down.

STANDARDS & IDENTIFICATION

Meets Federal Specification **RR-C-271F, Type IVA, Grade A, Class 3**. 5:1 design factor on WLL. Each shackle permanently marked with trade size and WLL on the bow.

SPECIFICATIONS & DIMENSIONS

NOMINAL SIZE in.	WLL tons	WT. EACH lbs	A in.	B in.	C in.	D in.	E in.	F in.	H in.	L in.	N in.
5/16	3/4	0.22	0.53	0.38	1.22	0.31	0.84	0.75	2.09	1.47	0.31
3/8	1	0.33	0.66	0.44	1.44	0.38	1.03	0.91	2.49	1.78	0.38
1/2	2	0.79	0.81	0.64	1.88	0.50	1.31	1.19	3.28	2.31	0.50
5/8	3-1/4	1.68	1.06	0.77	2.38	0.63	1.69	1.50	4.19	2.94	0.69
3/4	4-3/4	2.72	1.25	0.89	2.81	0.75	2.00	1.81	4.97	3.50	0.81
7/8	6-1/2	3.95	1.44	1.02	3.31	0.88	2.28	2.09	5.83	4.03	0.97
1	8-1/2	5.66	1.69	1.15	3.75	1.00	2.69	2.38	6.56	4.69	1.06
1-1/8	9-1/2	8.27	1.81	1.25	4.25	1.13	2.91	2.69	7.47	5.16	1.25
1-1/4	12	11.71	2.03	1.40	4.69	1.29	3.25	3.00	8.25	5.75	1.38
1-3/8	13-1/2	15.83	2.25	1.53	5.25	1.42	3.63	3.31	9.16	6.38	1.50
1-1/2	17	19.00	2.38	1.66	5.75	1.53	3.88	3.63	10.00	6.88	1.62
1-3/4	25	33.91	2.88	2.04	7.00	1.84	5.00	4.19	12.34	8.80	2.25
2	35	52.25	3.25	2.30	7.75	2.08	5.75	4.81	13.68	10.15	2.40
2-1/2	55	98.25	4.13	2.80	10.50	2.71	7.25	5.69	17.90	12.75	3.13
3	85	154.00	5.00	3.30	13.00	3.12	7.88	6.50	21.50	14.62	3.62

All dimensions in inches. WLL in short tons (2,000 lbs). Dimensions may vary slightly. Specifications subject to change without notice.

FROM COMMON TO CUSTOM — WE DO IT ALL

866-848-2032 • murphylift.com • 80% of orders ship same day • Free shipping on orders \$50+