

BEAM CLAMP




ALL-STEEL ADJUSTABLE I-BEAM CLAMP · 1 TO 12 TON · ROHS ZINC-PLATED · ASME BTH-1, B30.20 & B30.16

⚠ Read the manual before installation and use. Inspect before each use and never exceed the rated capacity.

FEATURES

- Robust all-steel construction
- Super-quick adjustment to fit most I-Beams
- ROHS-compliant zinc-plated finish
- Individual test certificate & serial number
- Forged and made in the U.S.A.
- Adjustable flange width 3"-13"

Standards: Meets ASME BTH-1 and ASME B30.20, and complies with portions of ASME B30.16 for use with manual and powered hoists.

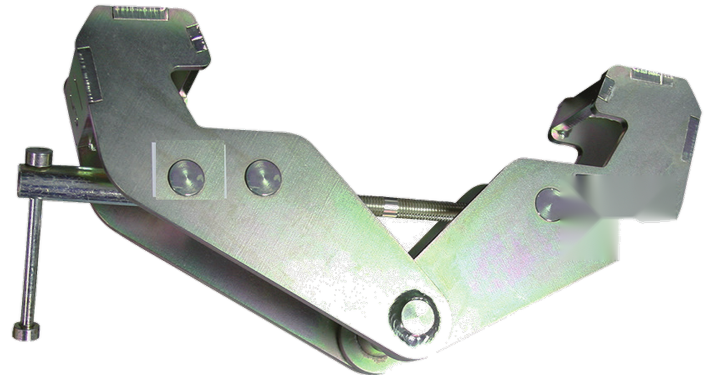

ALL-STEEL BEAM CLAMP

MODELS OZ1BCA - OZ12BCA

1-12

TON CAPACITY

3"-13"

I-BEAM FLANGE WIDTH


BTH-1

MEETS ASME · B30.20

U.S.A.

MADE IN

DIMENSIONS INCHES — SEE DRAWING

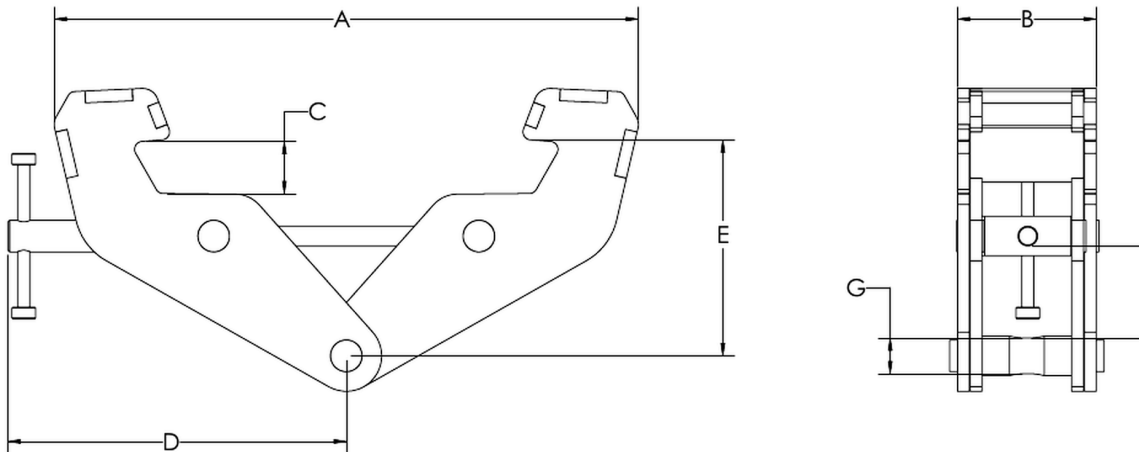

CAPACITIES & DIMENSIONS

PART NO.	CAP. (TONS)	ADJ. FLANGE WIDTH (IN.)	DIMENSIONS (IN.)							NET WT. (LB.)
			A*	B	C	D	E	F**	G	
OZ1BCA	1	3-9	13.67	2.51	0.89	8.75	4.38-5.75	1.66	0.75	8.86
OZ2BCA	2	3-9	13.67	2.91	0.89	8.75	4.38-5.75	1.60	0.88	10.96
OZ3BCA	3	3.5-13	18.57	3.94	1.65	10.75	6.85-9.00	3.03	0.98	21.96
OZ5BCA	5	3.5-13	18.57	4.41	1.65	10.75	6.85-9.00	2.95	1.13	25.89
OZ10BCA	10	3.5-13	20.28	4.72	1.52	11.19	7.25-9.10	2.48	1.63	39.12
OZ12BCA	12	3.5-13	20.99	4.72	1.46	11.44	8.40-9.35	3.61	1.44	43.17

*Distance at maximum adjustable flange width. **Hook clearance at maximum adjustable flange width. All dimensions in inches; weights in pounds. ROHS-compliant zinc-plated finish. Specifications reproduced from manufacturer data and subject to change without notice — verify against the certificate supplied with each clamp. Inspect before each use and remove from service if damaged. ⚠ California Prop 65: cancer and reproductive harm — www.P65Warnings.ca.gov.

FROM COMMON TO CUSTOM — WE DO IT ALL

866-848-2032 · murphylift.com · 80% of orders ship same day · Free shipping on orders \$50+