

PLATE LIFTING CLAMPS — UNIVERSAL & HORIZONTAL

PCUA UNIVERSAL · PCH HORIZONTAL · ½ TO 5 METRIC TON WLL · ALL-STEEL BODY · MEETS ASME B30.20 & EU 2006/42/EC



PCUA
UNIVERSAL



PCH
HORIZONTAL

⚠ Read and follow the operator's manual before use. Never exceed rated capacity. Do not use to lift people or loads over people.

All-steel body for durable strength in a compact size, for material with surface hardness < HRC 37. **PCUA Universal** clamps lift, turn, and transfer plates through a full **180° turning range**; **PCH Horizontal** clamps handle plates flat and are used in matched pairs.

Individually serialized and tested to **2× WLL** — factory proof-load certification included. Now with carved-in labeling.

½ - 5

METRIC TON WLL


2×

WLL PROOF TESTED

B30.20

ASME · 2006/42/EC


PCUA UNIVERSAL VERTICAL & SIDE-LOAD PLATE CLAMPS

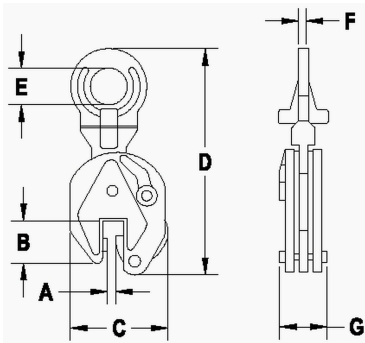

MURPHY PART NO.	WLL (TON)	WEIGHT (LBS.)	DIMENSIONS (IN.)						
			A PLATE SIZE	B	C	D	E	F	G
1138005	0.5t	4.4	0-5/8	1.7	4.2	8.5	1.2	0.4	2.0
1138010	1.0t	9.9	0-3/4	2.5	5.7	11.5	1.9	0.5	2.6
138020	2.0t	16.1	0-1	3.1	6.9	14.5	2.7	0.6	3.0
1138030	3.0t	33.0	0-1-1/8	3.3	8.1	16.9	2.9	0.8	4.0
1138050	5.0t	47.5	0-2	3.9	9.4	18.9	3.1	0.9	4.3

Rated capacity by load angle: 0° = 100% WLL · 45° = 50% WLL. Minimum 10% of WLL required to engage grip · 180° turning range · lever pre-tensions and releases jaws.

PCH HORIZONTAL FLAT PLATE CLAMPS — USE IN PAIRS

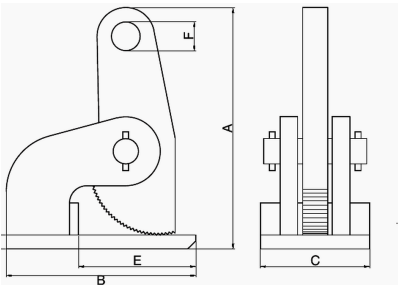

MURPHY PART NO.	WLL/PAIR (TON)	WEIGHT (LBS.)	JAW OPENING	DIMENSIONS (IN.)					
				A	B	C	D	E	F
PCH005	0.5t	6.2	0-1-3/8	6.61	5.51	2.56	0.47	3.86	0.79
PCH010	1.0t	13.2	0-2-3/8	10.43	7.09	2.95	0.47	4.33	0.98
PCH020	2.0t	16.5	0-2-3/8	10.43	7.09	3.15	0.63	4.33	0.98
PCH030	3.0t	22	0-2-3/8	12.01	8.66	3.54	0.70	5.31	1.18
PCH050	5.0t	34	0-2-3/8	12.01	8.66	4.33	0.98	4.92	1.18

Rated capacity by top sling angle: 0-60° = 100% · 60-90° = 75% · 90-120° = 50% (max 120°). WLL is per pair — use in matched pairs only.

FEATURES

- All-steel body — durable strength in a smaller size
- For material with surface hardness < HRC 37
- PCUA: 180° turning range for positioning & transfer
- PCUA: spring lever pre-tensions and releases grip jaws

SELECTION & USE

- PCUA Universal — vertical lifting & turning of plates
- PCH Horizontal — flat plate handling, used in pairs
- PCUA requires min. 10% of WLL to ensure grip
- Reduce capacity for load/sling angle (see tables)

COMPLIANCE & QUALITY

- Meets ASME B30.20 & EU Directive 2006/42/EC
- Individually serialized; tested to 2× WLL
- Factory proof-load test certificate included
- Replacement parts & kits available

All dimensions in inches; capacities in metric tons (1 metric ton = 1,000 kg). Specifications reproduced from manufacturer data — verify against the certificate supplied with each clamp. PCH WLL is rated per pair and clamps must be used in matched pairs. Inspect before each use and remove from service if damaged. Read the operator's manual before use — never exceed rated capacity, and do not use to lift people or loads over people.

FROM COMMON TO CUSTOM — WE DO IT ALL

866-848-2032 · murphylift.com · 80% of orders ship same day · Free shipping on orders \$50+