

JAW & JAW TURNBUCKLES


HOT DIP GALVANIZED · FORGED · FATIGUE RATED · ASME B30.26

BENEFITS & FEATURES

- End fittings Quenched & Tempered or Normalized; bodies heat treated by normalizing
- Hot Dip galvanized steel
- **Recommended for straight or in-line pull only**
- Forged jaw ends: bolts & nuts for 1/4" through 5/8"; pins & cotters on 3/4" through 2-3/4"
- Modified UNJ thread on end fittings for improved fatigue properties
- Body has UNC threads · Lock Nuts available for all sizes
- Fatigue Rated · Meets or exceeds ASME B30.26

Note: Not all turnbuckles come with bolt and cotter. Sizes 1/4" through 5/8" are fitted with bolts and nuts. Sizes 3/4" and larger are fitted with cotter and pin only.

DIMENSION REFERENCE

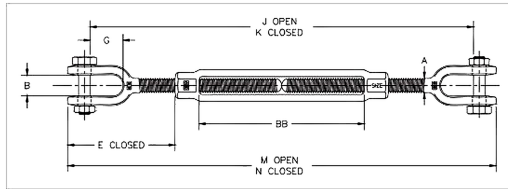

RATED CAPACITIES & DIMENSIONS

THREAD DIA. & TAKE UP (IN.)	WLL (LB)*	WT. (LB)	DIMENSIONS (IN.)										
			A	J OPEN	K CLOSED	M OPEN	N CLOSED	R	S	X OPEN	X CLOSED	G	BB
* 5/16 x 4-1/2	800	.48	.31	13.92	9.42	14.88	9.98	.95	.44	2.20	4.58	.64	4.58
* 3/8 x 6	1,200	.75	.38	17.56	11.56	18.24	12.24	1.13	.53	2.48	6.10	.85	6.10
1/2 x 6	2,200	1.72	.50	19.94	13.94	20.82	14.82	1.41	.71	3.56	6.03	1.07	6.03
1/2 x 12	2,200	2.63	.50	32.20	20.23	33.11	21.11	1.71	.71	3.54	12.36	1.07	12.36
5/8 x 6	3,500	2.75	.63	21.72	15.72	22.72	16.72	1.80	.88	4.35	6.03	1.32	6.03
5/8 x 12	3,500	4.12	.63	34.06	22.06	35.06	23.06	1.80	.88	4.34	12.39	1.32	12.39
3/4 x 6	5,200	4.22	.75	23.24	17.24	24.50	18.50	2.09	1.00	5.12	6.13	1.52	6.13
3/4 x 12	5,200	6.12	.75	35.64	23.64	36.90	24.90	2.09	1.00	5.09	12.59	1.52	12.59
3/4 x 18	5,200	7.83	.75	47.64	29.64	48.90	30.90	2.09	1.00	5.09	18.53	1.52	18.53
7/8 x 12	7,200	8.83	.88	36.70	24.70	38.20	26.20	2.38	1.25	5.79	12.16	1.77	12.16
7/8 x 18	7,200	11.5	.88	49.17	31.17	50.67	32.67	2.38	1.25	5.79	18.63	1.77	18.63
1 x 6	10,000	9.62	1.00	26.24	20.24	28.00	22.00	3.00	1.43	6.50	6.18	2.05	6.18
1 x 12	10,000	13.0	1.00	50.24	32.24	52.00	34.00	3.00	1.43	6.50	18.18	2.05	18.18
1 x 18	10,000	16.3	1.00	50.24	32.24	52.00	34.00	3.00	1.43	6.50	18.18	2.05	18.18
1 x 24	10,000	20.2	1.00	62.84	38.84	64.60	40.60	3.00	1.43	6.47	24.84	2.05	24.84
1-1/4 x 12	15,200	19.9	1.25	41.24	30.14	44.38	32.38	3.59	1.82	8.49	18.06	2.82	18.06
1-1/4 x 18	15,200	23.8	1.25	54.14	36.14	56.38	38.38	3.59	1.82	8.49	18.06	2.82	18.06
1-1/4 x 24	15,200	27.8	1.25	66.70	42.76	68.94	44.94	4.09	1.82	8.49	24.62	2.82	24.62
1-1/2 x 12	21,400	28.7	1.50	44.24	32.24	46.74	34.74	4.09	2.12	9.46	12.32	2.81	12.32
1-1/2 x 18	21,400	34.1	1.50	56.46	38.24	58.96	40.74	4.09	2.12	9.46	18.32	2.81	18.32
1-1/2 x 24	21,400	39.6	1.50	68.86	44.86	71.36	47.36	4.09	2.12	9.46	24.34	2.81	24.34
1-3/4 x 18	28,000	50.7	1.75	57.38	39.38	60.38	42.38	4.65	2.38	9.97	18.37	2.55	18.37
1-3/4 x 24	28,000	58.2	1.75	69.38	45.38	72.38	48.38	4.65	2.38	9.97	24.37	2.55	24.37
2 x 24	38,000	73.0	2.00	75.68	51.68	79.18	55.18	5.61	2.89	13.76	24.60	4.00	24.60
2-1/2 x 24	60,000	149	2.50	79.18	55.18	85.84	61.84	6.49	3.12	13.76	24.60	4.44	24.60
2-3/4 x 24	75,000	2.75	81.34	57.34	85.84	61.84	7.00	2.25	3.15	15.09	24.65	4.19	24.65

*Proof Load is 2.5 times the Working Load Limit. Ultimate Load is 5 times the Working Load Limit. * (5/16 & 3/8 sizes) Mechanical Galvanized.

CALL FOR CUSTOMIZED CONFIGURATIONS

866-848-2032 · murphylift.com · Lock nuts & custom assemblies available