

FORGED SCREW PIN ANCHOR SHACKLES

GRADE 6 • QUENCHED & TEMPERED • ALLOY PINS • 6:1 DESIGN FACTOR • HOT-DIP GALVANIZED OR SELF-COLORED • FATIGUE RATED




SHOWN: HOT-DIP GALVANIZED FINISH

⚠️ **6:1 design factor.** Maximum proof load is 2× the Working Load Limit. Reduce WLL for side-loading applications — see Warnings & Applications. Inspect before each use. Never exceed rated WLL.

Forged, quenched & tempered screw pin anchor shackles with alloy pins, meeting Grade 6 performance requirements. WLL and Grade 6 marking permanently shown on every shackle. **Hot-dip galvanized (G)** or **self-colored (S)** finish — sizes 3/8" and below are mechanically galvanized.

Approved for use at **-40°F to 400°F** (-40°C to 204°C). Fatigue rated at 1.5× the WLL at 20,000 cycles. Charpy impact 31 ft-lb (42 J) avg. at -4°F available upon request. Proof testing and ABS, DNV, Lloyds third-party certificates available at time of order.

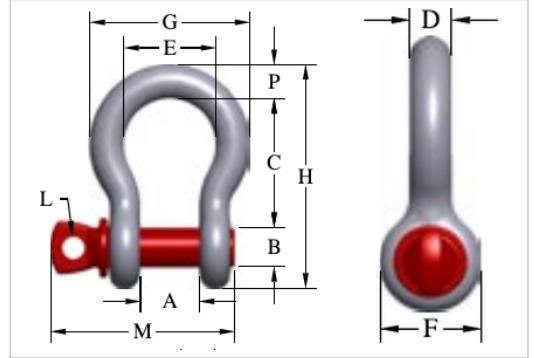

6:1

DESIGN FACTOR

GRADE 6

FORGED ALLOY PIN

1/3 - 55 T

WLL RANGE

WORKING LOAD LIMITS & DIMENSIONS — ALL SIZES

NOMINAL SIZE (IN.)	WORKING LOAD LIMIT (TONS)	G-209 PART NO.	WEIGHT EACH (LB)	DIMENSIONS (IN.)												
				A	TOL. A ±	B	C	TOL. C ±	D	E	F	G	H	L	M	P
3/16"	1/3	1018357	.06	.38	.06	.25	.88	.06	.19	.60	.56	.98	1.47	.16	1.14	.19
1/4"	1/2	1018375	.10	.47	.06	.32	1.13	.06	.25	.78	.62	1.28	1.84	.19	1.43	.25
5/16"	3/4	1018393	.18	.53	.06	.38	1.21	.06	.31	.84	.75	1.46	2.09	.22	1.71	.31
3/8"	1	1018419	.31	.66	.06	.44	1.45	.13	.38	1.03	.92	1.79	2.50	.25	2.06	.38
7/16"	1-1/2	1018437	.38	.75	.06	.50	1.69	.13	.44	1.16	1.06	2.04	2.91	.31	2.37	.44
1/2"	2	1018455	.72	.81	.06	.63	1.88	.13	.50	1.31	1.18	2.31	3.28	.38	2.69	.50
5/8"	3-1/4	1018473	1.37	1.06	.06	.75	2.38	.13	.62	1.69	1.50	2.93	4.19	.44	3.34	.69
3/4"	4-3/4	1018491	2.35	1.25	.06	.88	2.81	.25	.75	2.00	1.81	3.50	4.97	.50	3.97	.81
7/8"	6-1/2	1018516	3.62	1.44	.06	1.00	3.31	.25	.88	2.28	2.10	4.04	5.83	.50	4.50	.97
1"	8-1/2	1018534	5.03	1.69	.06	1.16	3.76	.25	1.00	2.69	2.38	4.69	6.56	.56	5.13	1.06
1-1/8"	9-1/2	1018552	7.41	1.81	.06	1.25	4.27	.25	1.16	2.91	2.68	5.15	7.47	.63	5.97	1.25
1-1/4"	12	1018570	9.50	2.03	.06	1.41	4.69	.25	1.29	3.26	3.00	5.76	8.26	.69	6.50	1.38
1-3/8"	13-1/2	1018598	13.53	2.25	.13	1.56	5.22	.25	1.42	3.62	3.31	6.38	9.16	.75	6.93	1.50
1-1/2"	17	1018614	17.20	2.38	.13	1.66	5.76	.25	1.53	3.88	3.62	6.94	10.00	.81	7.43	1.62
1-3/4"	25	1018632	30.90	2.88	.13	2.03	7.00	.25	1.84	5.00	4.19	8.80	12.34	1.00	9.19	2.25
2"	35	1018650	45.00	3.25	.13	2.28	7.75	.25	2.08	5.75	4.81	10.15	13.68	1.13	10.36	2.40
2-1/2"	55	1018678	85.75	4.12	.25	2.78	10.51	.25	2.72	7.25	5.81	12.75	17.92	1.38	13.17	3.13

Working Load Limit in short tons (2,000 lb). 6:1 design factor — Maximum Proof Load is 2× the WLL. For WLL reduction due to side-loading applications, see Warnings & Applications. All dimensions in inches; tolerance ± as shown. 3/16" size available in galvanized finish only. Replacement pins available for sizes 1-1/8" and larger — contact Murphy. Weights are nominal per shackle. Meets or exceeds all requirements of ASME B30.26 and ISO 2415; performance requirements of Federal Specification RR-C271 Type IVA, Grade A, Class 2.

FEATURES & CONSTRUCTION

- Forged, quenched & tempered alloy steel
- Meets Grade 6 performance requirements
- WLL & grade permanently shown on each shackle
- Fatigue rated at 1.5× WLL at 20,000 cycles
- Operating range -40°F to 400°F

FINISHES & SIZES

- Hot-dip galvanized (G) — outdoor/corrosive
- Self-colored (S) — indoor/dry service
- 3/8" and smaller: mechanically galvanized
- WLL range 1/3 ton through 55 tons
- Sizes 3/16" through 2-1/2" nominal

APPROVALS & CERTIFICATIONS

- ASME B30.26 compliant
- ISO 2415 performance & design
- Fed Spec RR-C271, Type IVA, Grade A, Class 2
- ABS Marine, MOU, & Lifting Appliance type approval
- Proof certs (ABS, DNV, Lloyds) on request

FROM COMMON TO CUSTOM — WE DO IT ALL

866-848-2032 · murphylift.com · 80% of orders ship same day · Free shipping on orders \$50+