


STANDARD EYE & EYE WIRE ROPE SLINGS

MECHANICAL SPLICE · EIPS-IWRC · SINGLE LEG · FLEMISH EYE · DESIGN FACTOR 5:1

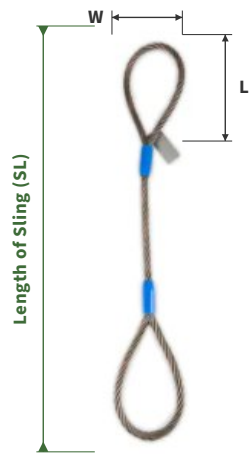

Rated capacities based on pin diameter no larger than natural eye width or less than the nominal sling diameter.

Rated capacities based on design factor of **5 to 1**.

Horizontal sling angles less than 30° shall not be used.

All M-Sling wire rope slings are mechanically spliced using the Flemish Eye method with swaged steel sleeves.

EIPS CAPACITIES (TONS) — HITCH TYPES



VERTICAL



CHOKER HITCH



BASKET HITCH

RATED CAPACITIES & DIMENSIONS

ROPE DIA.	EIPS CAPACITIES (TONS)			EYE HOOK (TONS)	STANDARD EYE DIMENSIONS		MIN. EYE & EYE SLING LENGTH
	VERTICAL	CHOKER HITCH	VERTICAL BASKET*		W"	L"	
1/4"	0.65	0.48	1.3	3/4T	2	4	1'6"
5/16"	1	0.74	2	1T	2-1/2	5	1'9"
3/8"	1.4	1.1	2.9	1-1/2T	3	6	2'
7/16"	1.9	1.4	3.9	2T	3-1/2	7	2'3"
1/2"	2.5	1.9	5.1	3T	4	8	2'6"
9/16"	3.2	2.4	6.4	5T	4-1/2	9	2'9"
5/8"	3.9	2.9	7.8	5T	5	10	3'
3/4"	5.6	4.1	11	7T	6	12	3'6"
7/8"	7.6	5.6	15	11T	7	14	4'
1"	9.8	7.2	20	11T	8	16	4'6"
1-1/8"	12	9.1	24	15T	9	18	5'
1-1/4"	15	11	30	15T	10	20	5'6"
1-3/8"	18	13	36	22T	11	22	6'
1-1/2"	21	16	42	22T	12	24	7'
1-3/4"	28	21	57	30T	14	28	8'
2"	37	28	73	37T	16	32	9'
2-1/4"	44	35	89	45T	18	36	10'
2-1/2"	54	42	109	60T	20	40	11'
2-3/4"	65	51	130	—	22	44	12'
3"	77	60	153	—	24	48	13'

*Rated capacities basket hitch based on D/d ratio of 25. All capacities in tons (2,000 lbs). EIPS-IWRC construction.

CALL FOR CUSTOMIZED CONFIGURATIONS

866-848-2032 · murphylift.com · Custom lengths, fittings & multi-leg assemblies available