

HIGH TEST CHAIN GRADE 43


Working Load Limit: 2,600 to 20,200 lbs.

Grade 43 chain, commonly called High Test, is manufactured to meet ASTM and NACM specifications. Typical uses include container securement, logging, towing, and marine industry. Grade 43 chain is available in many finishes and package configurations. It should not be used for overhead lifting.

BENEFITS & FEATURES

- Meets ASTM & NACM standards
- Available in a wide assortment of finishes including: self-colored and galvanized
- 50% stronger than Grade 30 chain
- Permanent identification on chain
- 100% proof tested
- Available in drums and multiple styles of assemblies
- Design factor 3:1

Finishes: Self Colored, Galvanized

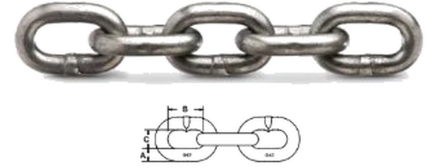

CHAIN SIZE (IN.)	WORKING LOAD LIMIT (LBS.)	NOMINAL CHAIN DIMENSIONS (IN.)			INSIDE WIDTH C	WEIGHT (LBS./FT.)	APPROX. LINKS (PER FT.)
		MATERIAL DIA. A	INSIDE LENGTH B	INSIDE WIDTH C			
1/4	2,600	0.28	1.22	0.51	0.65	9.87	—
5/16	3,900	0.34	1.25	0.54	1.04	9.60	—
3/8	5,400	0.39	1.35	0.58	1.40	8.89	—
1/2	9,200	0.52	1.73	0.81	2.42	6.93	—
5/8	13,000	0.63	1.92	0.86	3.63	6.26	—
3/4	20,200	0.78	2.40	1.07	5.68	5.06	—

PROOF COIL CHAIN GRADE 30


Working Load Limit: 800 to 10,600 lbs.

Grade 30 chain, commonly called Proof Coil, is manufactured to meet ASTM & NACM specifications. Typical uses include barrier chains, trailer safety chains, light construction, marine industry, etc. Grade 30 chain is available in a wide assortment of finishes and packaged configurations. It should not be used for overhead lifting.

BENEFITS & FEATURES

- Meets ASTM & NACM standards
- Available in a wide assortment of finishes including: Self-Colored, Zinc Plated, Galvanized, Powder Coated
- Permanent identification on chain (embossed with CM30)
- 100% proof tested
- Available in drums, pails and multiple styles of assemblies
- Design factor 4:1

Finishes: Self Colored, Zinc Plated, Galvanized, Powder Coated

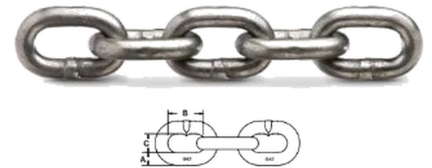

CHAIN SIZE (IN.)	WORKING LOAD LIMIT (LBS.)	MATERIAL DIAMETER (IN.)	INSIDE LENGTH (IN.)	INSIDE WIDTH (IN.)	WEIGHT (LBS./FT.)	APPROX. LINKS (PER FT.)
3/16	800	0.22	0.97	0.45	0.40	12.4
1/4	1,300	0.28	1.22	0.51	0.65	9.9
5/16	1,900	0.33	1.27	0.60	0.98	9.5
3/8	2,650	0.39	1.35	0.58	1.40	8.9
1/2	4,500	0.52	1.73	0.81	2.42	6.9
5/8	6,900	0.63	1.92	0.86	3.63	6.3
3/4	10,600	0.78	2.40	1.07	5.68	5.0

CALL FOR BULK PRICING & CUSTOM ASSEMBLIES

866-848-2032 · murphylift.com · Available in drums, pails & cut lengths · Same day shipping