

FORGED WELD-ON PAD EYE LIFTING LUGS

WLL 1/2-6-1/2 TONS • A36 CARBON & 316 STAINLESS STEEL • HOLE REAMED TO $\pm 0.01"$ • AWS D1.1 WELD SPEC FORGED-IN




Forged heavy-duty pad eyes create an immediate, **certified weld-on attachment point** for lifting, securing, or moving equipment. The clean, low-profile design takes up little space, and the hole is reamed to fit the shackle pin/bolt within $\pm 0.01"$.

Load rating, weld specification, and weld line are **forged into each pad eye** — date coded, engineered, and certified. Available in A36 carbon steel and 316 weldable stainless steel.

Single-use, one-time placement — weld per the forged-in AWS D1.1 spec; inspect before each lift and never exceed rated WLL.

DIMENSIONS

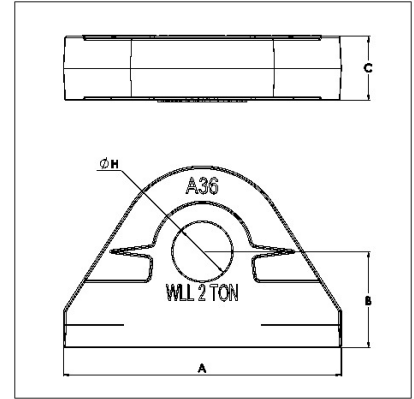

1/2 - 6-1/2 T

WLL RANGE

AWS D1.1

WELD SPEC FORGED-IN

$\pm 0.01"$

REAMED HOLE TOL.

A36 CARBON STEEL • WELD-SPEC FORGED-IN

WORKING LOAD LIMITS & DIMENSIONS — ALL MODELS

MURPHY PART NO.	WLL (TONS)	SHACKLE PIN (IN.)	DIMENSIONS (IN.)				WT. (LB)
			A	B	C	ØH	
A36 CARBON STEEL	Forged · weld-spec & weld line forged-in · date coded, engineered & certified						
LL0050	1/2	1/4	2-1/8	3/4	13/32	3/8	0.20
LL0100	1	3/8	2-7/16	7/8	9/16	9/16	0.40
LL0150	1-1/2	7/16	2-3/4	7/8	11/16	9/16	0.45
LL0200	2	1/2	3-1/4	1-1/8	3/4	11/16	0.80
LL0475	4-3/4	3/4	4-7/16	1-7/16	1-3/16	15/16	2.20
LL0650	6-1/2	7/8	5-3/16	1-5/8	1-5/16	1-1/16	3.05
316 STAINLESS STEEL	Forged · weldable 316 · hole reamed to fit shackle pin/bolt ±0.01"						
LLS0050	1/2	1/4	2-1/8	3/4	13/32	3/8	0.20
LLS0100	1	3/8	2-7/16	7/8	9/16	9/16	0.40
LLS0150	1-1/2	7/16	2-3/4	7/8	11/16	9/16	0.45
LLS0200	2	1/2	3-1/4	1-1/8	3/4	11/16	0.80
LLS0475	4-3/4	3/4	4-7/16	1-7/16	1-3/16	15/16	2.20
LLS0650	6-1/2	7/8	5-3/16	1-5/8	1-5/16	1-1/16	3.05

All dimensions in inches; weights in pounds (approximate). **A** = base width • **B** = height to hole center • **C** = material thickness • **ØH** = reamed hole diameter, reamed to fit the shackle pin/bolt $\pm 0.01"$. Working load limits apply to in-line (axial) loading — reduce capacity for angular loading per qualified rigging practice. Load rating, weld specification (AWS D1.1) and weld line are forged into each pad eye; date coded, engineered, and certified. Pad eyes are single-use, one-time placement application only, subject to qualified installation and end-user evaluation of fitness for purpose.

CONSTRUCTION

- Forged one-piece body
- A36 carbon steel or weldable 316 stainless
- Hole reamed to fit shackle pin/bolt $\pm 0.01"$
- Load rating forged into the body
- Weld specification & weld line forged-in
- Date coded, engineered & certified

SIZES & CONFIGURATION

- WLL 1/2, 1, 1-1/2, 2, 4-3/4 & 6-1/2 tons
- Shackle pin sizes 1/4" through 7/8"
- 12 stock models — carbon & stainless
- Low-profile, space-saving footprint
- Base width (A) 2-1/8" to 5-3/16"
- Reamed hole (ØH) 3/8" to 1-1/16"

APPLICATION & HANDLING

- Weld-on point to lift, secure & move
- Eliminates in-house fabrication delays
- Weld per the forged-in AWS D1.1 spec
- Single-use, one-time placement
- Inspect before each lift; never exceed WLL
- Import — carbon & stainless in stock

FROM COMMON TO CUSTOM — WE DO IT ALL

866-848-2032 • murphylift.com • 80% of orders ship same day • Free shipping on orders \$50+