

TURNBUCKLES — EYE & EYE

HOT-DIP GALVANIZED · FORGED · FATIGUE RATED · ASME B30.26 · WLL 800 TO 75,000 LBS.




BENEFITS & FEATURES

- End fittings Quenched & Tempered or normalized; bodies heat treated by normalizing
- Hot-dip galvanized steel
- **Recommended for straight or in-line pull only**
- Forged elongated eyes maximize easy attachment and minimize stress in the eye
- For sizes 1/4" through 2-1/2", a shackle one size smaller can be reeved through the eye
- Modified UNJ thread on end fittings for improved fatigue properties · body has UNC threads
- Fatigue rated to 20,000 cycles at 1-1/2 times WLL · meets or exceeds ASME B30.26
- Meets Federal Specification FF-T-791b and ASTM F-1145

⚠ Turnbuckles are recommended for straight or in-line pull only.

DIMENSION REFERENCE

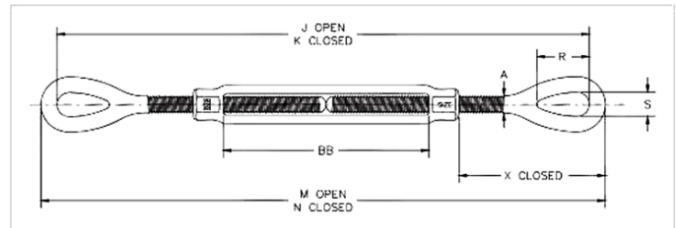

SPECIFICATIONS & DIMENSIONS

THREAD DIA. & TAKE UP (IN.)	WLL (LB)	WT. EACH (LB)	DIMENSIONS (IN.)								
			A	J OPEN	K CLOSED	M OPEN	N CLOSED	R	S	X CLOSED	BB
5/16 x 4-1/2	800	.48	.31	13.92	9.42	14.88	9.98	.95	.44	2.20	4.58
3/8 x 6	1,200	.75	.38	17.56	11.56	18.24	12.24	1.13	.53	2.48	6.10
1/2 x 6	2,200	1.72	.50	19.94	13.94	20.82	14.82	1.41	.71	3.56	6.03
1/2 x 12	2,200	2.63	.50	32.20	20.23	33.11	21.11	1.41	.71	3.54	12.36
5/8 x 6	3,500	2.75	.63	21.72	15.72	22.72	16.72	1.80	.88	4.35	6.03
5/8 x 12	3,500	4.12	.63	34.06	22.06	35.06	23.06	1.80	1.00	4.34	12.39
3/4 x 6	5,200	4.22	.75	23.24	17.24	24.50	18.50	2.09	1.00	5.12	6.13
3/4 x 12	5,200	6.12	.75	35.64	23.64	36.90	24.90	2.09	1.00	5.09	12.59
3/4 x 18	5,200	7.83	.75	47.64	29.64	48.90	30.90	2.09	1.00	5.12	18.53
7/8 x 12	7,800	8.83	.88	36.70	24.70	38.20	26.20	2.38	1.25	5.79	12.16
7/8 x 18	7,800	11.5	.88	49.17	31.17	50.67	32.67	2.38	1.25	5.79	18.63
1 x 6	10,000	9.62	1.00	26.24	20.24	28.00	22.00	3.00	1.43	6.50	6.18
1 x 12	10,000	13.0	1.00	38.24	26.24	40.00	28.00	3.00	1.43	6.50	12.18
1 x 18	10,000	16.3	1.00	50.24	32.24	52.00	34.00	3.00	1.43	6.50	18.18
1 x 24	10,000	20.2	1.00	62.84	38.84	64.60	40.60	3.00	1.43	6.47	24.84
1-1/4 x 12	15,200	19.9	1.25	41.14	29.14	44.38	32.38	3.59	1.82	8.49	12.06
1-1/4 x 18	15,200	23.8	1.25	54.14	36.14	56.38	38.38	3.59	1.82	8.49	18.06
1-1/4 x 24	15,200	27.8	1.25	66.70	42.70	68.94	44.94	4.09	1.82	8.49	24.62
1-1/2 x 12	21,400	28.7	1.50	44.24	32.24	46.74	34.74	4.09	2.12	9.46	12.32
1-1/2 x 18	21,400	34.1	1.50	56.44	38.24	58.94	40.74	4.09	2.12	9.46	18.32
1-1/2 x 24	21,400	39.6	1.50	68.86	44.86	71.36	47.36	4.09	2.12	9.46	24.37
1-3/4 x 18	28,000	50.7	1.75	57.38	39.38	60.38	42.38	4.65	2.38	9.97	18.37
1-3/4 x 24	28,000	58.2	1.75	69.38	45.38	72.38	48.38	4.65	2.38	9.97	24.37
2 x 24	45,000	70.0	2.00	75.68	51.68	79.18	55.18	5.89	3.12	13.76	24.60
2-1/2 x 24	60,000	149	2.49	79.18	55.18	83.18	59.18	6.49	3.12	15.09	24.65
2-3/4 x 24	75,000	175	2.75	81.34	57.34	85.84	61.84	7.00	3.25	15.09	24.65

Lock nuts available for all sizes. 100% proof tested. Design factor 4:1. Hot-dip galvanized finish. Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.

FEATURES

- Quenched & Tempered end fittings
- Hot-dip galvanized steel
- Forged elongated eyes
- 100% proof tested · lock nuts for all sizes

APPLICATIONS

- Wire rope tensioning
- Structural bracing
- Guy wire systems
- Marine rigging
- Straight / in-line pull only

CALL FOR CUSTOM LENGTHS & BULK PRICING

866-848-2032 · murphylift.com · All sizes in stock · Same day shipping