


TURNBUCKLES — JAW & EYE

HOT-DIP GALVANIZED · FORGED · FATIGUE RATED · ASME B30.26 · WLL 800 TO 75,000 LBS.




BENEFITS & FEATURES

- End fittings Quenched & Tempered or normalized; bodies heat-treated by normalizing
- Hot-dip galvanized steel
- **Recommended for straight or in-line pull only**
- Forged elongated eyes maximize easy attachment and minimize stress in the eye — for sizes 1/4" through 2-1/2" a shackle one size smaller can be reeved through the eye
- Forged jaw ends: bolts & nuts for 1/4" through 5/8"; pins & cotters on 3/4" through 2-3/4"
- Modified UNJ thread on end fittings for improved fatigue properties · body has UNC threads
- Fatigue rated to 20,000 cycles at 1-1/2 times WLL · meets or exceeds ASME B30.26
- Meets Federal Specification FF-T-791b, Type 1 Form 1 – Class 8, and ASTM F-1145

▲ Turnbuckles are recommended for straight or in-line pull only.

DIMENSION REFERENCE

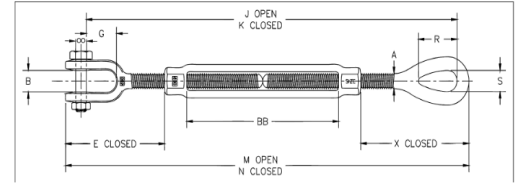

SPECIFICATIONS & DIMENSIONS

THREAD DIA. & TAKE UP (IN.)	WLL (LB)	WT. EACH (LB)	DIMENSIONS (IN.)											
			A	B	E CLOSED	G	J OPEN	K CLOSED	M OPEN	N CLOSED	R	S	X CLOSED	BB
* 5/16 x 4-1/2	800	.52	.25	.50	2.02	.87	13.50	9.00	14.30	9.80	.95	.44	2.20	4.58
* 3/8 x 6	1,200	.80	.31	.53	2.11	.85	16.91	10.91	17.87	11.87	1.13	.53	2.48	6.10
1/2 x 6	2,200	1.77	.37	.64	3.22	1.07	19.30	13.30	20.48	14.48	1.41	.71	3.56	6.03
1/2 x 9	2,200	2.25	.37	.64	3.20	1.07	25.59	16.59	26.77	17.77	1.41	.71	3.54	9.36
1/2 x 12	2,200	2.67	.37	.64	3.20	1.07	31.59	19.59	32.77	20.77	1.41	.71	3.54	12.36
5/8 x 6	3,500	2.98	.50	.79	3.90	1.32	20.73	14.73	22.27	16.27	1.80	.88	4.35	6.03
5/8 x 9	3,500	3.72	.50	.79	3.89	1.32	27.07	18.07	28.61	19.61	1.80	.88	4.34	9.39
5/8 x 12	3,500	4.35	.50	.79	3.89	1.32	33.07	21.07	34.61	22.61	1.80	.88	4.34	12.39
3/4 x 6	5,200	4.51	.63	.97	4.71	1.52	22.17	16.17	24.09	18.09	2.09	1.00	5.12	6.13
3/4 x 9	5,200	5.56	.63	.97	4.68	1.52	28.57	19.57	30.49	21.49	2.09	1.00	5.09	9.59
3/4 x 12	5,200	6.42	.63	.97	4.68	1.52	34.57	22.57	36.49	24.49	2.09	1.00	5.09	12.59
3/4 x 18	5,200	8.14	.63	.97	4.71	1.52	46.57	28.57	48.49	30.49	2.09	1.00	5.12	18.53
7/8 x 12	7,200	9.10	.75	1.16	5.50	1.77	35.68	23.68	37.91	25.91	2.38	1.25	5.79	12.16
7/8 x 18	7,200	11.6	.75	1.16	5.50	1.77	48.15	30.15	50.38	32.38	2.38	1.25	5.79	18.63
1 x 6	10,000	10.0	.88	1.34	6.09	2.05	25.03	19.03	27.59	21.59	3.00	1.43	6.50	6.18
1 x 12	10,000	13.4	.88	1.34	6.09	2.05	37.03	25.03	39.59	27.59	3.00	1.43	6.50	12.18
1 x 18	10,000	16.7	.88	1.34	6.09	2.05	49.03	31.03	51.59	33.59	3.00	1.43	6.50	18.18
1 x 24	10,000	20.6	.88	1.34	6.06	2.05	61.63	37.63	64.19	40.19	3.00	1.43	6.47	24.84
1-1/4 x 12	15,200	20.9	1.13	1.84	8.09	2.82	40.76	28.76	43.98	31.98	3.59	1.82	8.49	12.06
1-1/4 x 18	15,200	24.8	1.13	1.84	8.09	2.82	52.76	34.76	55.98	37.98	3.59	1.82	8.49	18.06
1-1/4 x 24	15,200	28.8	1.13	1.84	8.09	2.82	65.32	41.32	68.54	44.54	3.59	1.82	8.49	24.62
1-1/2 x 12	21,400	30.6	1.38	2.06	8.93	2.81	42.50	30.50	46.21	34.21	4.09	2.12	9.46	12.32
1-1/2 x 18	21,400	36.0	1.38	2.06	8.93	2.81	54.50	36.50	58.21	40.21	4.09	2.12	9.46	18.32
1-1/2 x 24	21,400	41.5	1.38	2.06	8.93	2.81	67.12	43.12	70.83	46.83	4.09	2.12	9.46	24.94
1-3/4 x 18	28,000	52.1	1.63	2.60	9.36	3.35	55.37	37.37	59.77	41.77	4.65	2.38	9.97	18.37
1-3/4 x 24	28,000	59.7	1.63	2.60	9.36	3.35	67.37	43.37	71.77	47.77	4.65	2.38	9.97	24.37
2 x 24	37,000	89.9	2.00	2.62	11.80	3.74	72.66	48.66	77.95	53.95	5.81	2.69	13.03	24.48
2-1/2 x 24	60,000	158	2.25	3.06	13.26	4.44	76.08	52.08	82.68	58.68	6.49	3.12	13.76	24.60
2-3/4 x 24	75,000	187	2.75	3.69	14.92	4.19	78.05	54.05	85.67	61.67	7.00	3.25	15.09	24.65

5:1 design factor. Proof Load is 2.5 times the Working Load Limit. * Mechanically galvanized. Lock nuts available for all sizes. Hot-dip galvanized finish. Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit. Dimension A is printed as "00" in the manufacturer's 2025 table; the dimension drawing labels it A.

FEATURES

- Quenched & Tempered end fittings
- Hot-dip galvanized steel
- Forged elongated eyes & forged jaw ends
- 100% proof tested · lock nuts for all sizes

APPLICATIONS

- Wire rope tensioning
- Structural bracing
- Guy wire systems
- Marine rigging
- Straight / in-line pull only

CALL FOR CUSTOM LENGTHS & BULK PRICING

866-848-2032 · murphylift.com · All sizes in stock · Same day shipping