

Microcontroller (NORA-B106/nRF5340)

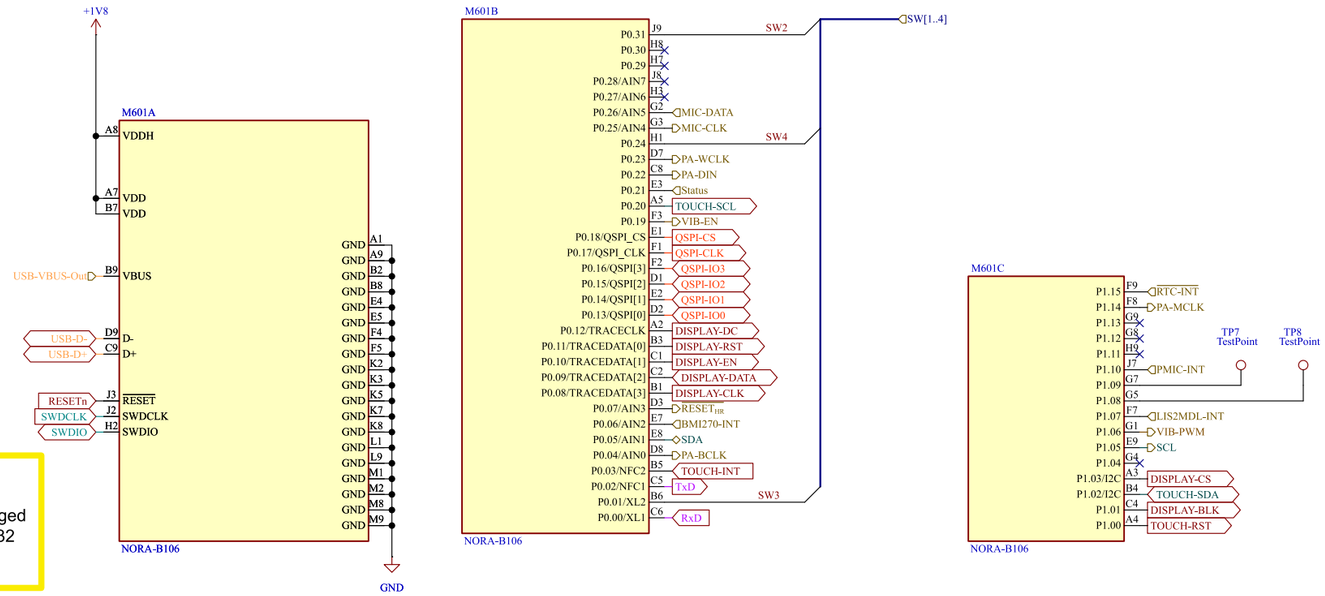


DESIGN NOTE:
The SPI lines for the display can´t be changed and are required for 32 MHz operation.

Display

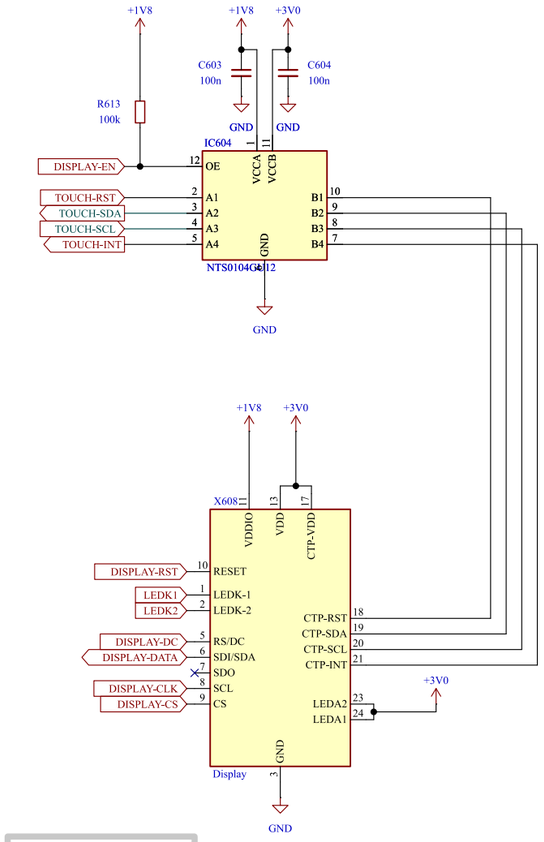


DESIGN NOTE:
NTS0104GU12 has internal pullups.


Display backlight

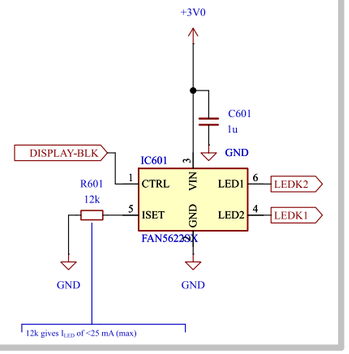

USB

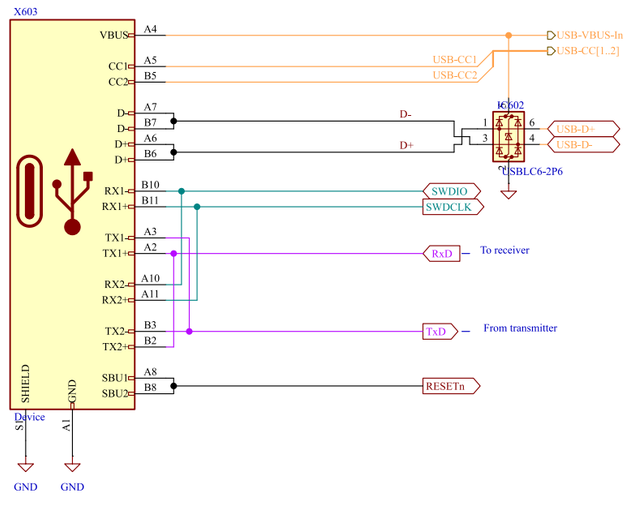

External Flash

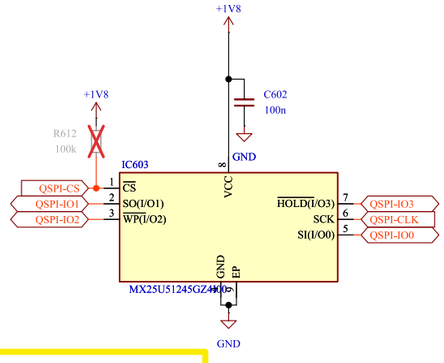

DESIGN NOTE:
Make sure that the Flash Memory supports
4k sector erase commands (limited by QSPI driver)!

Comments:	Company: ZSWatch		Variant: PRELIMINARY	Git Hash: fccc54e
	Board Name: **Watch-DevKit-HW**		Project Name: **ZSWatch Watch-DevKit**	
Sheet Title: MCU	File Name: MCU.kicad_sch	Designer: Daniel Kampert	Date: 2025-07-13	Revision: 1.0.0+ (Unreleased)
Sheet Path: /Project Architecture/MCU/		Reviewer:	Size: **A3**	Sheet: **6** of **9**