




Microcontroller  
(NORA-B106/nRF5340)

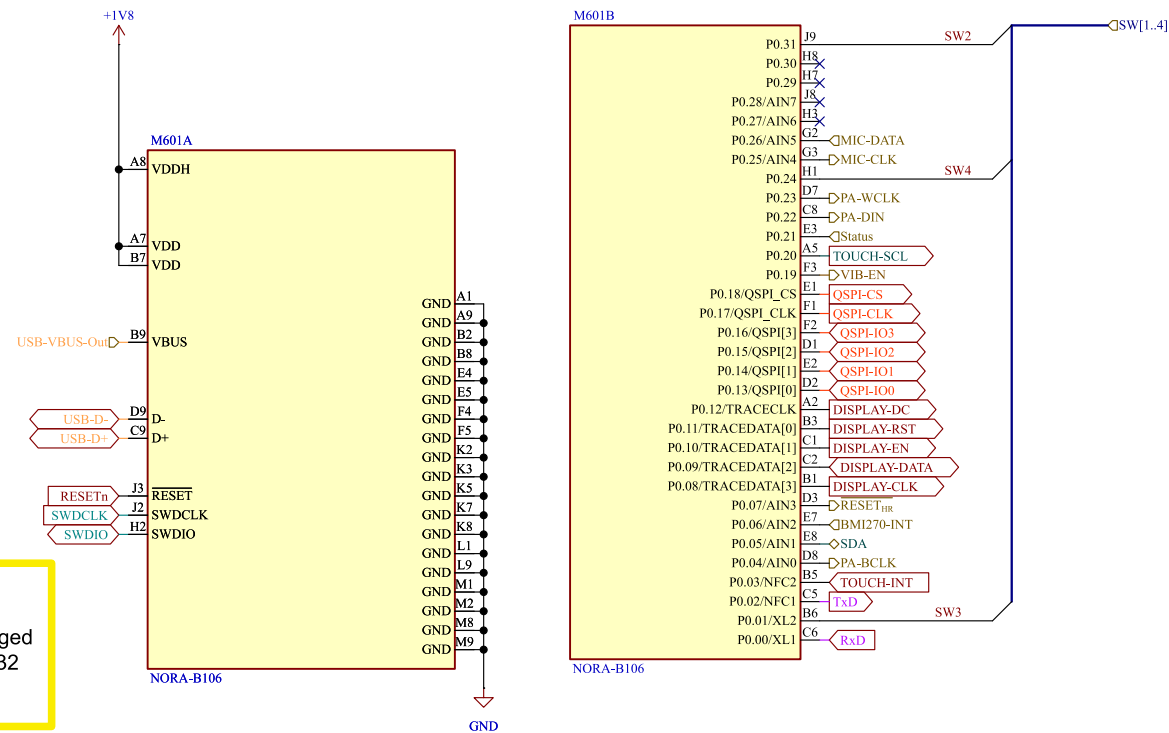

**DESIGN NOTE:**  
The SPI lines for the display can't be changed and are required for 32 MHz operation.

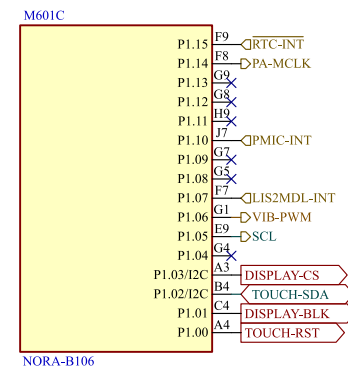


## Display

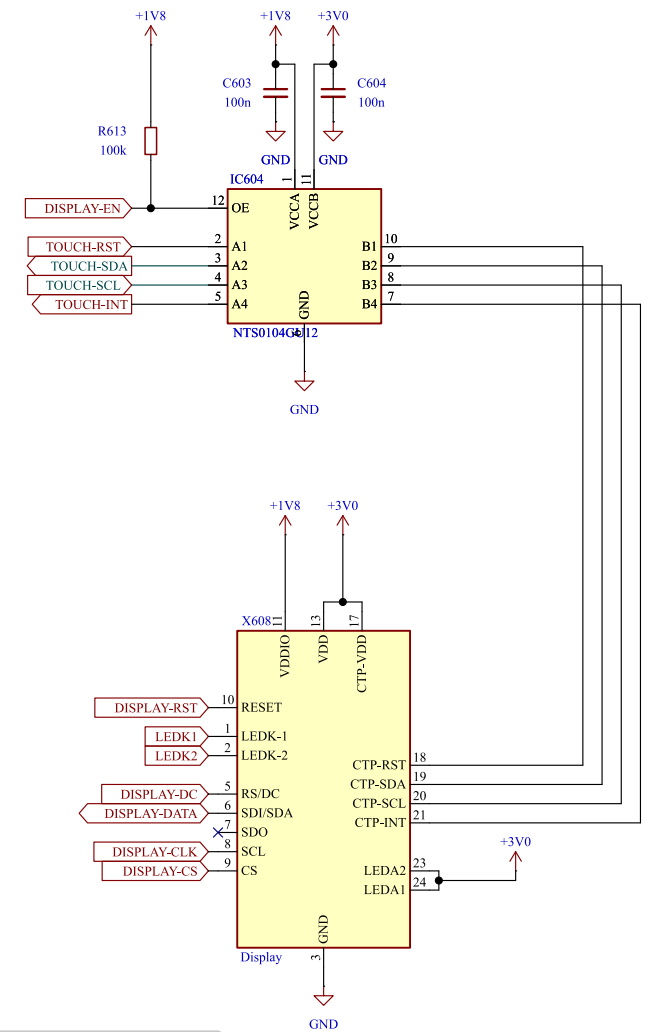


DESIGN NOTE:  
NTS0104GU12 has  
internal pullups.

## Display backlight

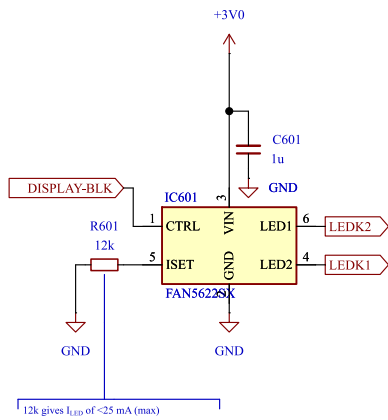


12k gives  $I_{LED}$  of  $<25$  mA (max)

## USB

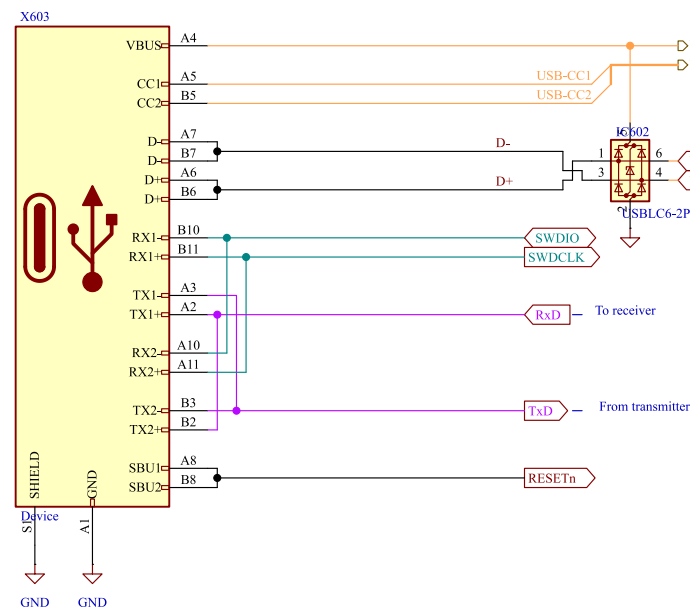

## External Flash

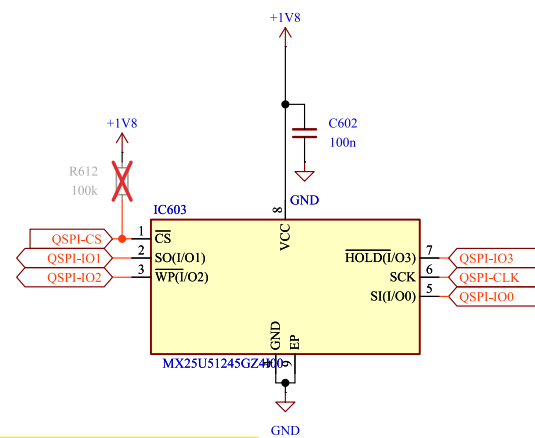

**DESIGN NOTE:**  
Make sure that the Flash  
Memory supports  
4k sector erase commands  
(limited by QSPI driver)!

|                                           |                                       |                             |                                              |                                  |
|-------------------------------------------|---------------------------------------|-----------------------------|----------------------------------------------|----------------------------------|
| Comments:                                 | Company:<br><b>ZSWatch</b>            |                             | Variant:<br>PRELIMINARY                      | Git Hash:<br>fccc54e             |
|                                           | Board Name:<br><b>Watch-DevKit-HW</b> |                             | Project Name:<br><b>ZSWatch Watch-DevKit</b> |                                  |
| Sheet Title:<br>MCU                       | File Name:<br>MCU.kicad_sch           | Designer:<br>Daniel Kampert | Date:<br>2025-07-13                          | Revision:<br>1.0.0+ (Unreleased) |
| Sheet Path:<br>/Project Architecture/MCU/ |                                       | Reviewer:                   | Size:<br><b>A3</b>                           | Sheet:<br><b>6</b> of <b>9</b>   |