

Zachary Vella, IT
 Institute of Information & Communication Technology
 Malta College of Arts, Science & Technology
 Corradino Hill
 Paola PLA 9032
 {zachary.vella}@mcast.edu.mt

***Index Terms*—MCAST, IICT, L^AT_EX, Project, Paper**

I. INTRODUCTION

With the advancements that have been made in the field of vision-based control and real-time motion capture technology, there will be new possibilities for humans to interact with computers. The focus of this research is on the utilisation of a camera-based system that tracks the movements of the person's arm and is then replicated in real-time through a virtual arm. Such a method of communication with computers holds significant potential in several practical applications in fields regarding medical, rescue operations, and the handling of hazardous material, which all require precise and responsive robotic control as a necessity. By integrating computer vision techniques, limb tracking and learning algorithms, this study aims to enhance both accuracy and adaptability for different robotic and limb movement situations. The ability to map human motion accurately onto either a digital or robotic counterpart is a crucial aspect of this research. Another crucial addition for the future aspect of this research is the integration of haptic feedback, specifically through the use of gloves that will allow the user to sense when the virtual or robot arm is making contact with an object. The implementation of a feedback mechanism can have a significant improvement on the user's spatial awareness and overall control in comparison with traditional controllers, which can lead to a more intuitive and natural, almost symbiotic, relationship with robotic systems. To conduct this study, an interpretive philosophical approach will be taken, employing both deductive reasoning and experimental stages. A mixed methods approach will be adopted, combining both qualitative and quantitative data, which will be collected over a longitudinal time frame. A questionnaire will be used to gather feedback on the user experience, performance improvements and possible modifications for enhancing the system. The data collected through these questionnaires will provide valuable insight into the possible uses and effectiveness of vision-based control systems and where their application can have a significant improvement. The primary goal of this research is to evaluate the effectiveness of vision-based control systems to replicate real-time human arm movement with enhanced accuracy and greater responsiveness. With this leverage, computer vision and machine learning will be able to explore improvements in motion tracking, a greater reduction in latency, and overall user interaction. The findings of this research could have significant contributions to multiple fields, including assistive technology,

automation, and virtual reality. These again demonstrate the practical benefits of vision-based motion control systems over traditional controller-based systems.

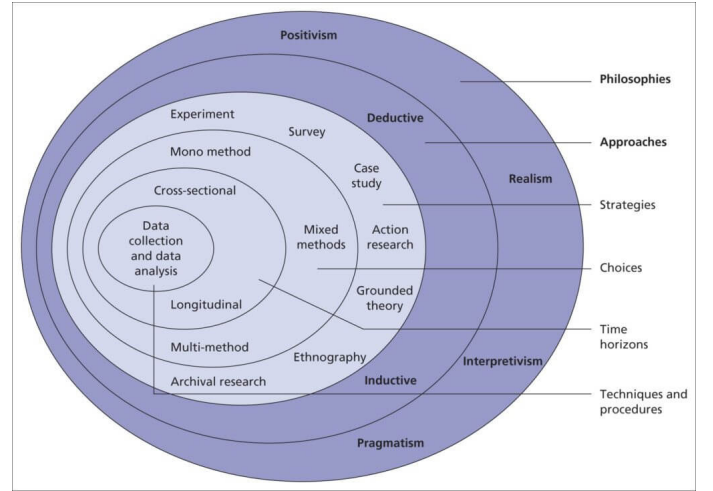


Fig. 1. Research Onion

II. REVIEW OF RESEARCH METHODOLOGY

In our modern society, people in our modern society have grown used to simple human-computer interaction (HCI), mostly involving input devices including joysticks, mice and keyboards. In robotics and automation, these are rather frequently used. But as technology develops, these user interfaces (UI) have to grow concurrently. Human-robot interactions (HRI) are thus based on hands as input devices. In difficult tasks, this provides simpler control, enhances safety, accuracy and responsiveness. Papers with research and applications on the application of gesture-based systems over several sectors will be examined in this review.

This is only a synopsis of what this technology offers. The hardware below is used for the tests and experiments that will help clarify what this can alter.

Such systems have shown their usability in several settings. [1] have created a mixed-reality teleoperation system using a virtual reality (VR) helmet whereby users controlled a robotic arm with three degrees of freedom—shoulder, elbow, and wrist. Task completion measures, the System Usability Scale (SUS), and head tracking were used to evaluate operator performance in simulated hazardous environments—that is, those related to nuclear facility decommissioning. More technically,

[2] created an automatic control system for a seven-degrees-of-freedom (7-DOF) robotic arm. Validated under controlled laboratory conditions, their system performed real-time grasping tasks using RGB camera input and object posture estimates driven by neural networks. Their efforts show the need for visual feedback and pose estimation in enhancing robotic manipulation accuracy. Complementing these methods, [3] proposed a continuous, real-time gesture recognition system grounded on skeletal tracking. Built on MediaPipe hand pose estimation and TD-Net architecture, their model was tested using the IPN dataset and showed low inference latency and high accuracy. Especially, this study concentrated on model performance in software-only environments and omitted integration with physical hardware.

By means of these illustrations, the capacity to support several sectors is shown; hence, conversations will focus on the technical elements of HRI development and the applied strategies.

By using an Arduino UNO and five servo motors, [4] helped in this field by creating a cheap gesture-activated robotic hand. A simple live camera feed caught hand gestures, which were then mapped to finger movements for assistive uses. Although the system lacked sophisticated tools like pose estimation, its simplicity and cost point to the possibility for more general access in less developed areas. Turning now to aerial robotics, [5] applied the Robot Operating System (ROS) gesture-based control system for unmanned aerial vehicles (UAVS). Hand gestures recorded via RGB input were converted in this system into UAV flight commands. Their studies show how gesture recognition might reach fields including reconnaissance and emergency response outside of ground-based robotics. Though their hardware and software complexity vary, these systems have several fundamental goals: robustness in gesture recognition, interaction with real-time control systems, and user-centric performance evaluation. Peer-reviewed and published by the IEEE, all of the cited studies guaranteed methodological consistency and dependability. To keep academic rigour, non-academic sources devoid of empirical validation were not included in this study. The results of these studies, taken together, show how increasingly flexible gesture-based systems are. While [3] shows the need for recognition models for fluid, continuous control, the work of [1] emphasises the relevance of such systems in high-risk industrial uses. Whereas [3] stresses accessible design for assistive use cases, [2] bridges robotic manipulation with prosthesis through pose estimation. Conversely, [5] highlights how well gesture control might be used in UAV navigation and autonomy.

There are still some areas limited by the present technological development, even with hardware and software related to the tracking and control of hand gestures.

Before these systems can adequately replace conventional input devices, several technological challenges must be overcome. For robotic arms, one such issue is the issue with reach-to-grasp motion. The technologies used to estimate the target object's structure, compute the point for contact and plan the robotic arm's trajectory to reach it are essential if the arm is to

precisely grab the object with a reasonable amount of strength. Repeating the process to identify any potential mistakes, tests involving pick-and-place motions whereby the robot had to pick up a box and place it somewhere else. One of these mistakes happened when the robotic arm failed after colliding with the box changed its position. The primary cause turned out to be a wire in the tendon-driven mechanism that seemed to be elongated and hence generated the mistake. This led to another set of tests carried out at a posture whereby the arm was unable to reach the object. It struggled to identify a precise reachable path using a random [2] search strategy. Separating the hand gesture recognition causes another issue since fast hand gestures are not recognised by it. This also fits another issue: constant gesture recognition is gesture-spotting, thus, the program has to know when the gesture begins and ends to get another gesture. Temporal segmentation [3] is this. Naturally, detection also depends on other factors, including illumination. A live camera helped to capture the hand gestures. This operation led to a problem since the program ran under various light conditions. The same issue arises with hand gestures using various skin tones. [4] RoboFlow and YOLO, two AI-powered platforms, give strong tools for gesture dataset training and the chance to build stronger and broadly applicable models. Whether it's the inclusion of interchangeable tools for surgical use or protective casings for hazardous environments, hardware designs must also grow more modular to fit context-specific needs.

Once these limitations are addressed. This technology will keep becoming better as humans evolve and can be used without any difficulties.

In conclusion, gesture-based systems show promise but require further development before replacing traditional controls in safety-critical roles. In the future, artificial intelligence (AI) will be used to assist in the identification and tracking of a person's arm. Sites such as roboFlow allow users to annotate certain parts of an image and name it, for identification, such as a hand. This process requires the processing of thousands of images to train the dataset to identify what a hand is and what it is doing. The dataset can then be given to YOLO to run the program and verify its success. At the same time, the field of robotics will also have to advance to the point where its movement can copy ours accurately to perform said tasks as well as a human could without any of the risk. These robots will have to be built to do these specific jobs, Surgery robots will need to be small, nimble and accurate; construction robots will need strong servos, be resistant to the elements and be durable, etc. They can also be modular, allowing for adaptation to specific situations.

III. REVIEW OF RESEARCH TECHNIQUES

Human-computer interaction (HCI) keeps changing outside conventional input devices like joysticks, mice, and keyboards in the fast-developing technologically advanced environment of today. Human-robot interaction (HRI) systems, depending on more intuitive inputs, such as hand gestures, are in great demand as robotics gets more integrated into high-risk,




Fig. 2. Literature Map

assistive, and dynamic environments. This review addresses approaches investigated in earlier studies, supports the selected methodological approach for the investigation, and critically considers gaps and developments required for the effective application of gesture-based systems.

Investigating gesture-based HRI has a strong basis, thanks to recent studies. Using a mixed-reality teleoperation system run under VR headsets, assess performance using head tracking, task completion time, and the System Usability Scale (SUS). This work emphasised the dimension of usability required for simple robot control. Emphasising system accuracy and robustness, focused on continuous real-time gesture recognition using skeletal models and TD-Net architecture; while [2] used pose estimation techniques with an RGB camera to improve robotic grasping accuracy. [3] built a low-cost robotic hand using Arduino-based gesture detection, and [5] used ROS middleware to apply gesture commands to UAV control, so examining simpler hardware integrations.

Inspired by these studies—especially [1] for usability evaluation and [3] for real-time gesture recognition robustness—the method used in this study combines qualitative and quantitative elements. As shown clearly in [3] and [2], quantitative measures are required to evaluate system accuracy, response time, and control precision. Understanding the end-user experience, satisfaction, and system intractability depends equally on qualitative measures, including user feedback and usability evaluation [1].

This study uses an experimental approach mostly. Tested under controlled conditions, a vision-based hand tracking system is implemented and assessed using quantitative criteria, including gesture recognition accuracy and task completion speed. Concurrent with this, qualitative information will be gathered using standardised questionnaires covering user satisfaction, intractability, tiredness, and apparent system responsiveness. This matches [1] use of SUS scores and user trials to validate teleoperation systems.

In applications where human-machine trust is critical, this mixed-method approach enables not only objective system performance validation but also subjective human-centred evaluation, crucial in acknowledging that although performance depends on accuracy and latency (quantitative), usability and user experience (qualitative) usually define actual adoption.

One typical restriction noted in the examined material, though, is the lack of thorough testing under varied environmental conditions. Most studies were carried out in controlled, lab settings, which limits knowledge of system resilience

in practical use. A few papers, including [2] and [3], also stretched their testing over protracted periods, so creating a knowledge vacuum on how systems might function under user fatigue or degraded conditions. Inspired by the observed gaps in the literature, the present study intends to simulate different light conditions and extended sessions during testing phases to address this.

Another significant observation relates to hardware-software integration [3] delivered strong software models but without full hardware validation, thus stressing the risk of a mismatch between simulated and real-world systems. Thus, this project highlights direct hardware integration from the early development phases, so ensuring that the predictions of the model match actual robot behaviour — still another important lesson learnt from the examined approaches.

Finally, the approach selected for this review is motivated by [3] with its combination of systems and performance evaluation and the qualitative and quantitative measures applied by [1]. This work intends to help the practical development of gesture-activated robotic systems, which are efficient and user-friendly, by being able to balance both approaches and solving the gaps in knowledge regarding environmental robustness and the integration of hardware. Since robotics is always being included in more sensitive systems, including surgery, search and rescue, and assistive living, constant revision of these techniques is essential.

REFERENCES

- [1] M. Sobhani, A. Smith, M. Giuliani, and T. Pipe, “Usability study of a novel triple-arm mixed-reality robot teleoperation system,” in *2022 IEEE International Symposium on Safety, Security, and Rescue Robotics (SSRR)*, 2022, pp. 217–223.
- [2] S. Bai, J. Guo, Y. Jiang, H. Yokoi, and S. Togo, “Automatic control system for reach-to-grasp movement of a 7-dof robotic arm using object pose estimation with an rgb camera,” in *2023 IEEE International Conference on Robotics and Biomimetics (ROBIO)*, 2023, pp. 1–6.
- [3] T.-T. Nguyen, N.-C. Nguyen, D.-K. Ngo, V.-L. Phan, M.-H. Pham, D.-A. Nguyen, M.-H. Doan, and T.-L. Le, “A continuous real-time hand gesture recognition method based on skeleton,” in *2022 11th International Conference on Control, Automation and Information Sciences (ICCAIS)*, 2022, pp. 273–278.
- [4] J. Hossain Gourob, S. Raxit, and A. Hasan, “A robotic hand: Controlled with vision based hand gesture recognition system,” in *2021 International Conference on Automation, Control and Mechatronics for Industry 4.0 (ACMI)*, 2021, pp. 1–4.
- [5] Y. Yu, X. Wang, Z. Zhong, and Y. Zhang, “Ros-based uav control using hand gesture recognition,” in *2017 29th Chinese Control And Decision Conference (CCDC)*, 2017, pp. 6795–6799.