



(a) LiDAR-IMU temporal alignment

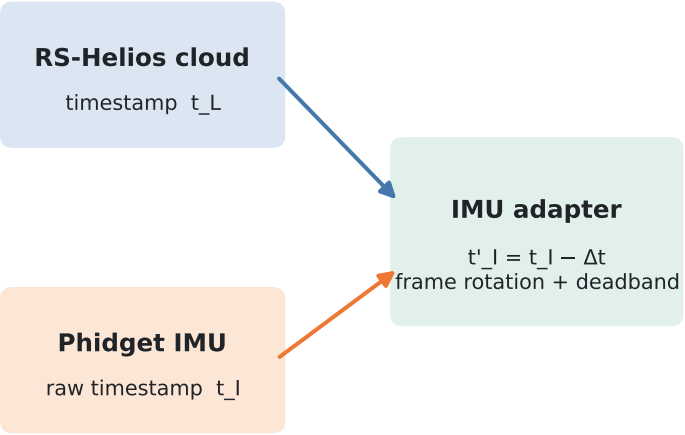

Estimate Δt by coarse/fine sweep and trajectory closure

(b) Extrinsic model used by Point-LIO

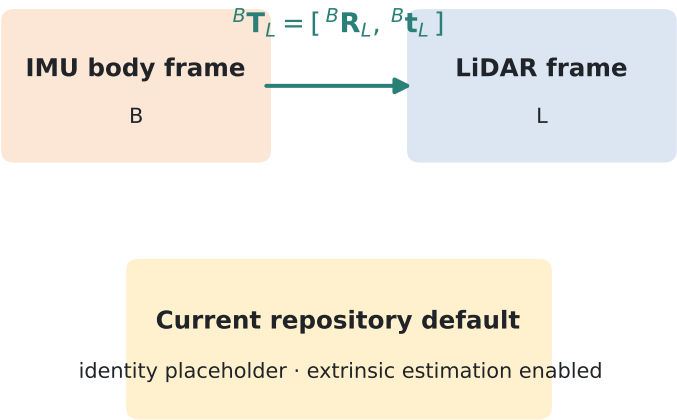

Measured rigid transform is required before odometry is trusted.

(c) Required calibration evidence

- 1 stationary IMU noise / gravity check
- 2 straight out-and-back trajectory
- 3 coarse then fine Δt sweep
- 4 LiDAR-only control run
- 5 endpoint drift and yaw closure
- 6 registered-map sharpness review

Recorded calibration bag: not found in repository

INTEGRATION STATUS

ROS 2 port and topic adapters implemented; calibration evidence pending.

EXPECTED OUTPUTS

/Laser_map · /aft_mapped_to_init · /path · registered clouds