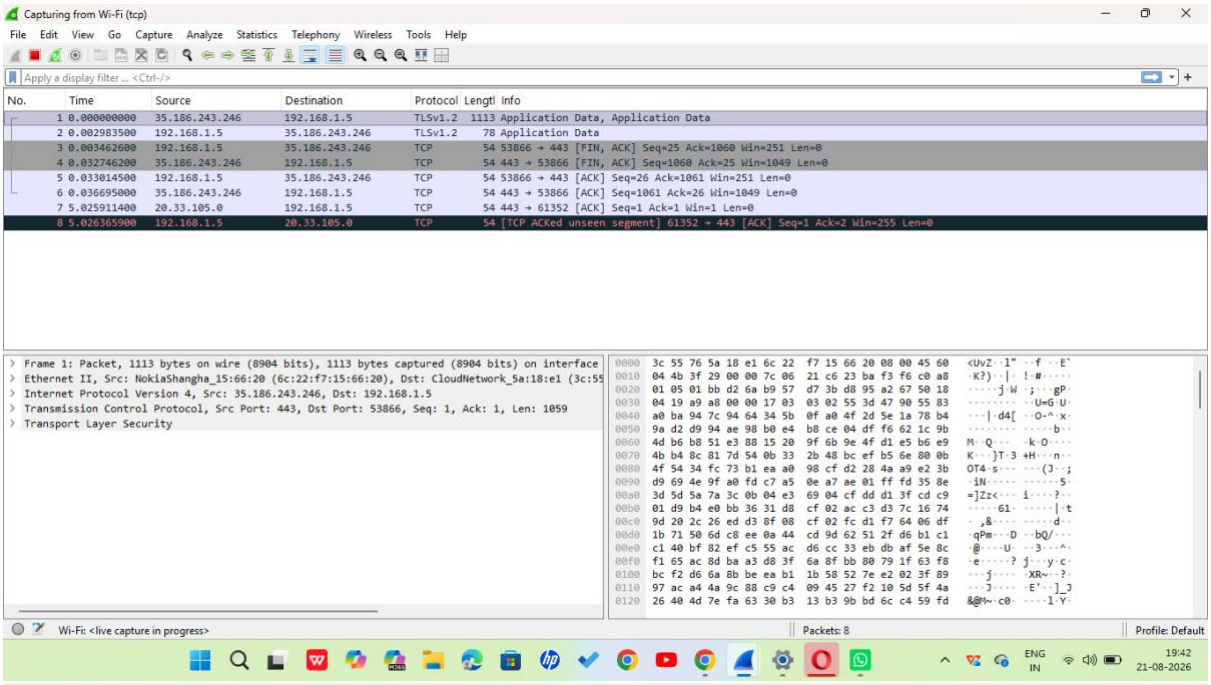
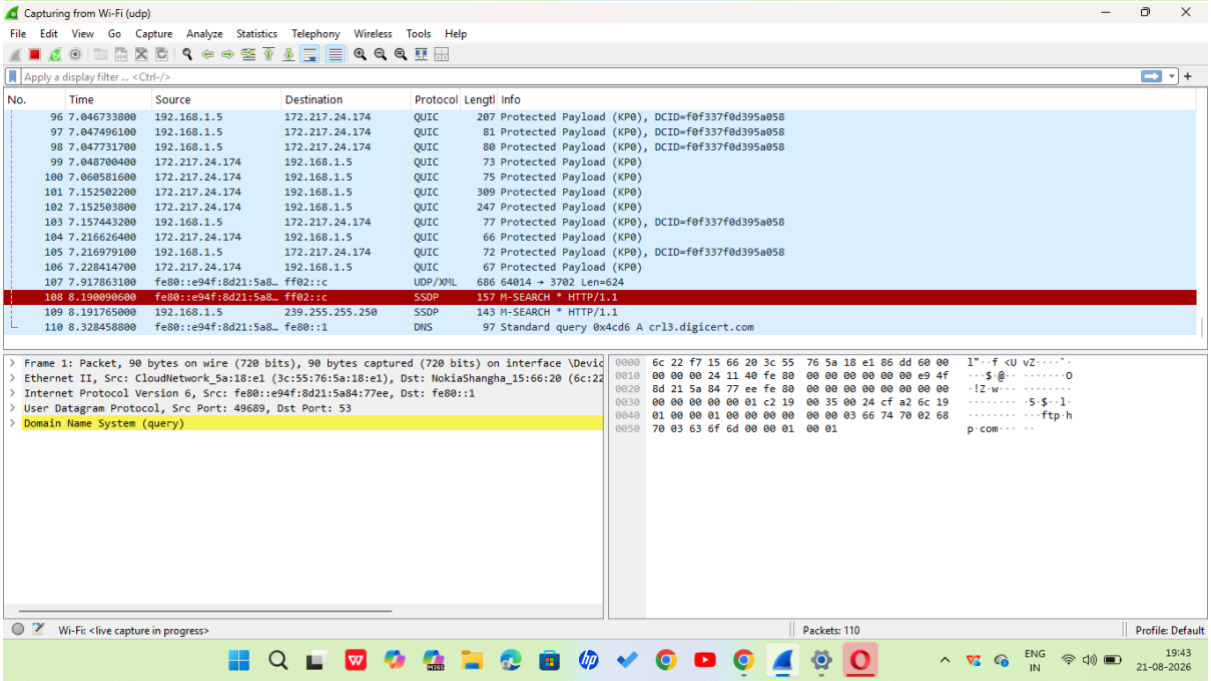
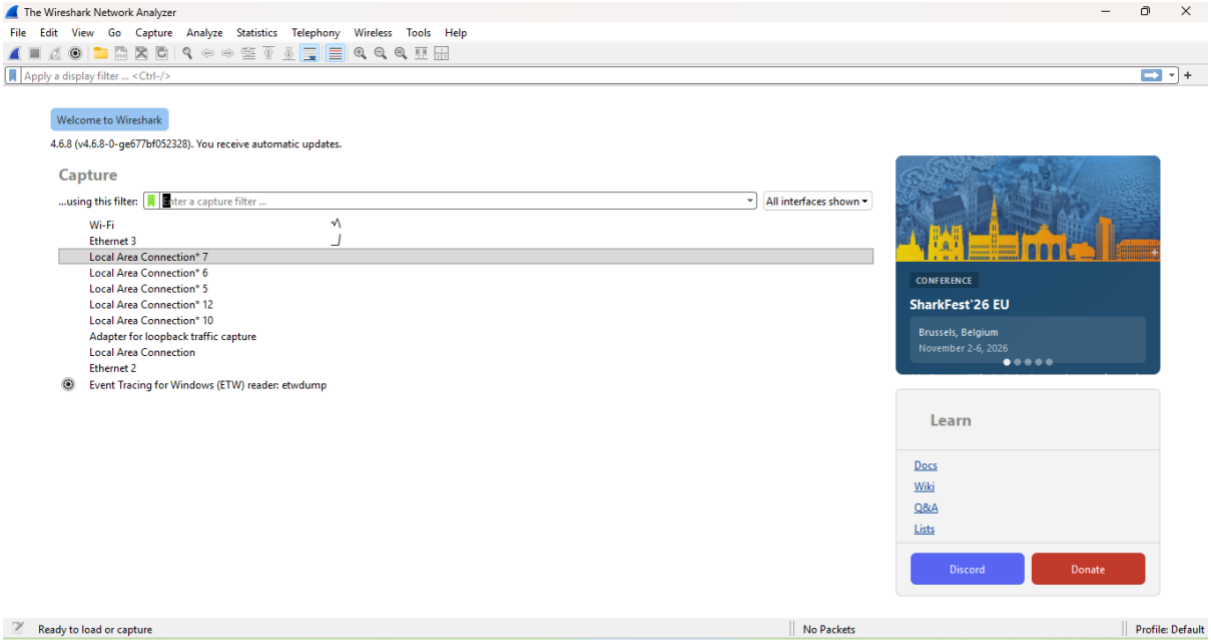

Capturing from Wi-Fi (tcp)
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
Apply a display filter ... <Ctrl-/>
No. Time Source Destination Protocol Lengt Info
1 0.000000000 35.186.243.246 192.168.1.5 TLSv1.2 1113 Application Data, Application Data
2 0.002983500 192.168.1.5 35.186.243.246 TLSv1.2 78 Application Data
3 0.003462600 192.168.1.5 35.186.243.246 TCP 54 53866 → 443 [FIN, ACK] Seq=25 Ack=1060 Win=251 Len=0
4 0.032746200 35.186.243.246 192.168.1.5 TCP 54 443 → 53866 [FIN, ACK] Seq=1060 Ack=25 Win=1049 Len=0
5 0.033014500 192.168.1.5 35.186.243.246 TCP 54 53866 → 443 [ACK] Seq=26 Ack=1061 Win=251 Len=0
6 0.036695000 35.186.243.246 192.168.1.5 TCP 54 443 → 53866 [ACK] Seq=1061 Ack=26 Win=1049 Len=0
7 5.025911400 20.33.105.0 192.168.1.5 TCP 54 443 → 61352 [ACK] Seq=1 Ack=1 Win=1 Len=0
8 5.026365900 192.168.1.5 20.33.105.0 TCP 54 [TCP ACKed unseen segment] 61352 → 443 [ACK] Seq=1 Ack=2 Win=255 Len=0
Frame 1: Packet, 1113 bytes on wire (8904 bits), 1113 bytes captured (8904 bits) on interface
Ethernet II, Src: NokiaShangha_15:66:20 (6c:22:f7:15:66:20), Dst: CloudNetwork_5a:18:e1 (3c:55
Internet Protocol Version 4, Src: 35.186.243.246, Dst: 192.168.1.5
Transmission Control Protocol, Src Port: 443, Dst Port: 53866, Seq: 1, Ack: 1, Len: 1059
Transport Layer Security
Wi-Fi: <live capture in progress>
Packets: 8
Profile: Default


Capturing from Wi-Fi (udp)
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
Apply a display filter ... <Ctrl-/>
No. Time Source Destination Protocol Lengt Info
96 7.046733800 192.168.1.5 172.217.24.174 QUIC 207 Protected Payload (KP0), DCID=f0f337f0d395a058
97 7.047496100 192.168.1.5 172.217.24.174 QUIC 81 Protected Payload (KP0), DCID=f0f337f0d395a058
98 7.047731700 192.168.1.5 172.217.24.174 QUIC 80 Protected Payload (KP0), DCID=f0f337f0d395a058
99 7.048700400 172.217.24.174 192.168.1.5 QUIC 73 Protected Payload (KP0)
100 7.060581600 172.217.24.174 192.168.1.5 QUIC 75 Protected Payload (KP0)
101 7.152502200 172.217.24.174 192.168.1.5 QUIC 309 Protected Payload (KP0)
102 7.152503800 172.217.24.174 192.168.1.5 QUIC 247 Protected Payload (KP0)
103 7.157443200 192.168.1.5 172.217.24.174 QUIC 77 Protected Payload (KP0), DCID=f0f337f0d395a058
104 7.216626400 172.217.24.174 192.168.1.5 QUIC 66 Protected Payload (KP0)
105 7.216979100 192.168.1.5 172.217.24.174 QUIC 72 Protected Payload (KP0), DCID=f0f337f0d395a058
106 7.228414700 172.217.24.174 192.168.1.5 QUIC 67 Protected Payload (KP0)
107 7.917863100 fe80::e94f:8d21:5a8… ff02::c UDP/XML 686 64014 → 3702 Len=624
108 8.190090600 fe80::e94f:8d21:5a8… ff02::c SSDP 157 M-SEARCH * HTTP/1.1
109 8.191765000 192.168.1.5 239.255.255.250 SSDP 143 M-SEARCH * HTTP/1.1
110 8.328458800 fe80::e94f:8d21:5a8… fe80::1 DNS 97 Standard query 0x4cd6 A crl3.digicert.com
Frame 1: Packet, 90 bytes on wire (720 bits), 90 bytes captured (720 bits) on interface \Devic
Ethernet II, Src: CloudNetwork_5a:18:e1 (3c:55:76:5a:18:e1), Dst: NokiaShangha_15:66:20 (6c:22
Internet Protocol Version 6, Src: fe80::e94f:8d21:5a84:77ee, Dst: fe80::1
User Datagram Protocol, Src Port: 49689, Dst Port: 53
Domain Name System (query)
Wi-Fi: <live capture in progress>
Packets: 110
Profile: Default


The Wireshark Network Analyzer
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
Apply a display filter ... <Ctrl-/>
Welcome to Wireshark
4.6.8 (v4.6.8-0-ge677bf052328). You receive automatic updates.
Capture
...using this filter: Enter a capture filter ...
All interfaces shown
Wi-Fi
Ethernet 3
Local Area Connection* 7
Local Area Connection* 6
Local Area Connection* 5
Local Area Connection* 12
Local Area Connection* 10
Adapter for loopback traffic capture
Local Area Connection
Ethernet 2
Event Tracing for Windows (ETW) reader: etwdump
CONFERENCE
SharkFest'26 EU
Brussels, Belgium
November 2-6, 2026
Learn
Docs
Wiki
Q&A
Lists
Discord
Donate
Ready to load or capture
No Packets
Profile: Default