

FLOOR PLAN - AREA A
SCALE: 1/16" = 1'-0"


FLOOR PLAN GENERAL NOTES


- BOLLARDS ARE TO BE LOCATED WITHIN THE BUILDING TO PROTECT EXPOSED ELECTRICAL PANELS, ELECTRICAL GEAR, ROOF DRAIN PIPING, WATER LINES, GAS LINES, AND SPRINKLER TEST DRAIN PIPING WITHIN 6" OF WAREHOUSE FLOOR. PROVIDE REPLACEABLE YELLOW SLEEVE.
- PROVIDE BARRIER RAILS TO PROTECT EXPOSED FIRE SPRINKLER RISER - PAINT SAFETY YELLOW.
- PROVIDE 2"x2"x48" HIGH STAINLESS STEEL CORNER GUARDS (TYP.) AT ALL EXPOSED CORNERS. ADHERE TO WALL (NO SCREWS).
- PROVIDE SEALANT WHERE EDGE OF TILE ABUTS GYPSUM.
- REFER TO DETAIL 2/A2.11 FOR TYPICAL METAL STUD OPENINGS AND CONTROL JOINT DETAILS. GO TO DETERMINE CONSTRUCTION METHODOLOGY.
- REFER TO DETAIL 2/A2.11 FOR TYPICAL CHAIR RAIL DETAIL.
- REFER TO SHEET A1.1.2 FOR FLOOR TRANSITION DETAILS 4A, 4B, 4C, 5A, 5B, AND 5C.

SHEET NOTES

- INSULATED HOLLOW METAL SERVICE DOOR AND FRAME. PAINT SEMI-GLOSS. GROUT FRAME SOLID AT CONCRETE OPENINGS. PAINT INTERIOR SIDE SAFETY RED P17.
- INSULATED MANUAL OVERHEAD SECTIONAL DOCK DOOR & DOCK LEVELER EQUIPMENT, WHERE SCHEDULED.
- LINE OF PID PLATFORM ABOVE.
- PID PLATFORM STAIR.
- 6" DIA. CONCRETE-FILLED GALVANIZED STEEL BOLLARDS. PROVIDE REPLACEABLE YELLOW SLEEVE. (TYP.) (SEE DETAILS ON SHEET A2.2)
- INSULATED MOTORIZED OVERHEAD SECTIONAL DOOR. SEE DOOR AND FRAME SCHEDULE.
- 6" DIA. X 10'-0" LONG CONCRETE-FILLED GALVANIZED STEEL BOLLARDS AT GENERATOR AND TRANSFORMERS. PROVIDE REPLACEABLE YELLOW SLEEVE. (TYP.) SEE DETAIL 2/A2.2 FOR DETAILS.
- ROOF LADDER WITH ROOF HATCH ABOVE. SEE A2.2 FOR DETAILS.
- HOSE VALVE CONNECTION - MAINTAIN 12" CLEARANCE AT LATCH SIDE OF DOORS. REFER TO FIRE PROTECTION DRAWINGS.
- FIRE RISER LOCATION - MAINTAIN 12" CLEARANCE AT LATCH SIDE OF DOORS. SEE DETAIL 2/A2.6. REFER TO FIRE PROTECTION DRAWINGS.
- ROOF DRAIN AND OVERFLOW DRAIN. CENTER BETWEEN OPENINGS. EXTEND OVER FLOW DRAIN THROUGH PRE-CAST. PROVIDE LAMBS TONGUE.
- PROVIDE 15-MIL VAPOR RETARDER UNDER ALL SLABS ON GROUND.
- INTERIOR COLUMN - SHALL BE PAINTED SAFETY YELLOW UP TO 12' A.F.F. AND NO PAINT SHALL BE APPLIED FROM 12' A.F.F. TO UNDERSIDE OF ROOF OR MEZZANINE STRUCTURE. ON COLUMNS WITH FIRE EXTINGUISHERS, PAINT 24" LONG SAFETY RED BAND. ALL 4 SIDES OF COLUMN. 20' A.F.F. PAINT ENTIRE COLUMN SAFETY RED WHERE FIRE HOSE CONNECTIONS ARE LOCATED. REFER TO SHEET A14.10.
- HOSE BIB - REFER TO PLUMBING DRAWINGS. PROVIDE FROST PROOF SILLOOK AT EXTERIOR WALLS. ENSURE ALL PIPING IS WITHIN THE THERMAL ENVELOPE.
- PRE-ENGINEERED EXT. BREAK ROOM.
- WIRE MESH PARTITION TO GO UP TO WITHIN AN INCH OR TWO OF THE BOTTOM OF THE CANOPY. INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
- KNOX BOX MOUNTED 6" ABOVE FINISHED FLOOR.
- COMPACTOR. CONTRACTOR TO COORDINATION WALL OPENING WITH OWNER. PROVIDE DOCK BUMPERS AT COMPACTOR.
- VRC - REFER TO ELECTRICAL FOR POWER REQUIREMENTS.
- MDI SDEN - REFER TO ELECTRICAL DRAWINGS.
- STEEL BARRIER. REFER TO FIRE RISER BARRIERS 2/A2.6.
- COORDINATE CLEARANCE WITH ELECTRICAL.
- MDP CABINET ON HOUSEKEEPING PAD - REFER TO STRUCTURAL DETAIL 9/S4.5. COORDINATE WITH PANEL PROVIDER.
- AUGER. CONTRACTOR TO COORDINATE WALL OPENING WITH OWNER.
- DOWNSPOUT.
- EMERGENCY SHOWER - REFER TO PLUMBING.
- REMOTE HOSE VALVE CONNECTION AT INTERIOR COLUMN - COORDINATE WITH OWNER/TECHNICIAN FOR FINAL LOCATION AND LAYOUT - REFER TO FIRE PROTECTION DRAWINGS.
- SURFACE MOUNTED STEEL BOLLARD. LOCATE SUCH THAT ANCHORS ARE MIN 3" FROM ALL CONCRETE JOINTS - SEE DETAIL 4/A2.1.1.
- TRANSFORMER - COORDINATE WITH OWNER.
- GENERATOR - REFER TO ELECTRICAL.

KEY PLAN

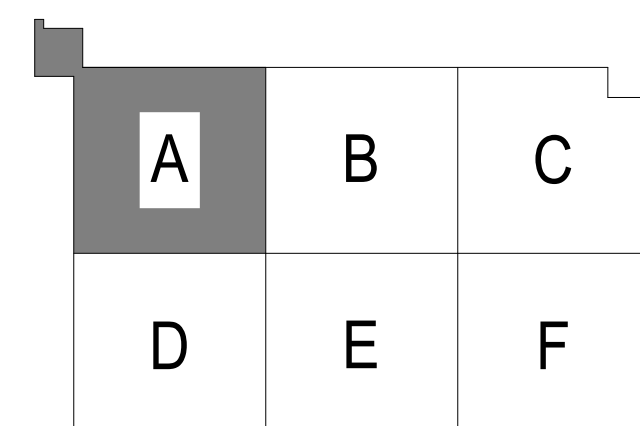

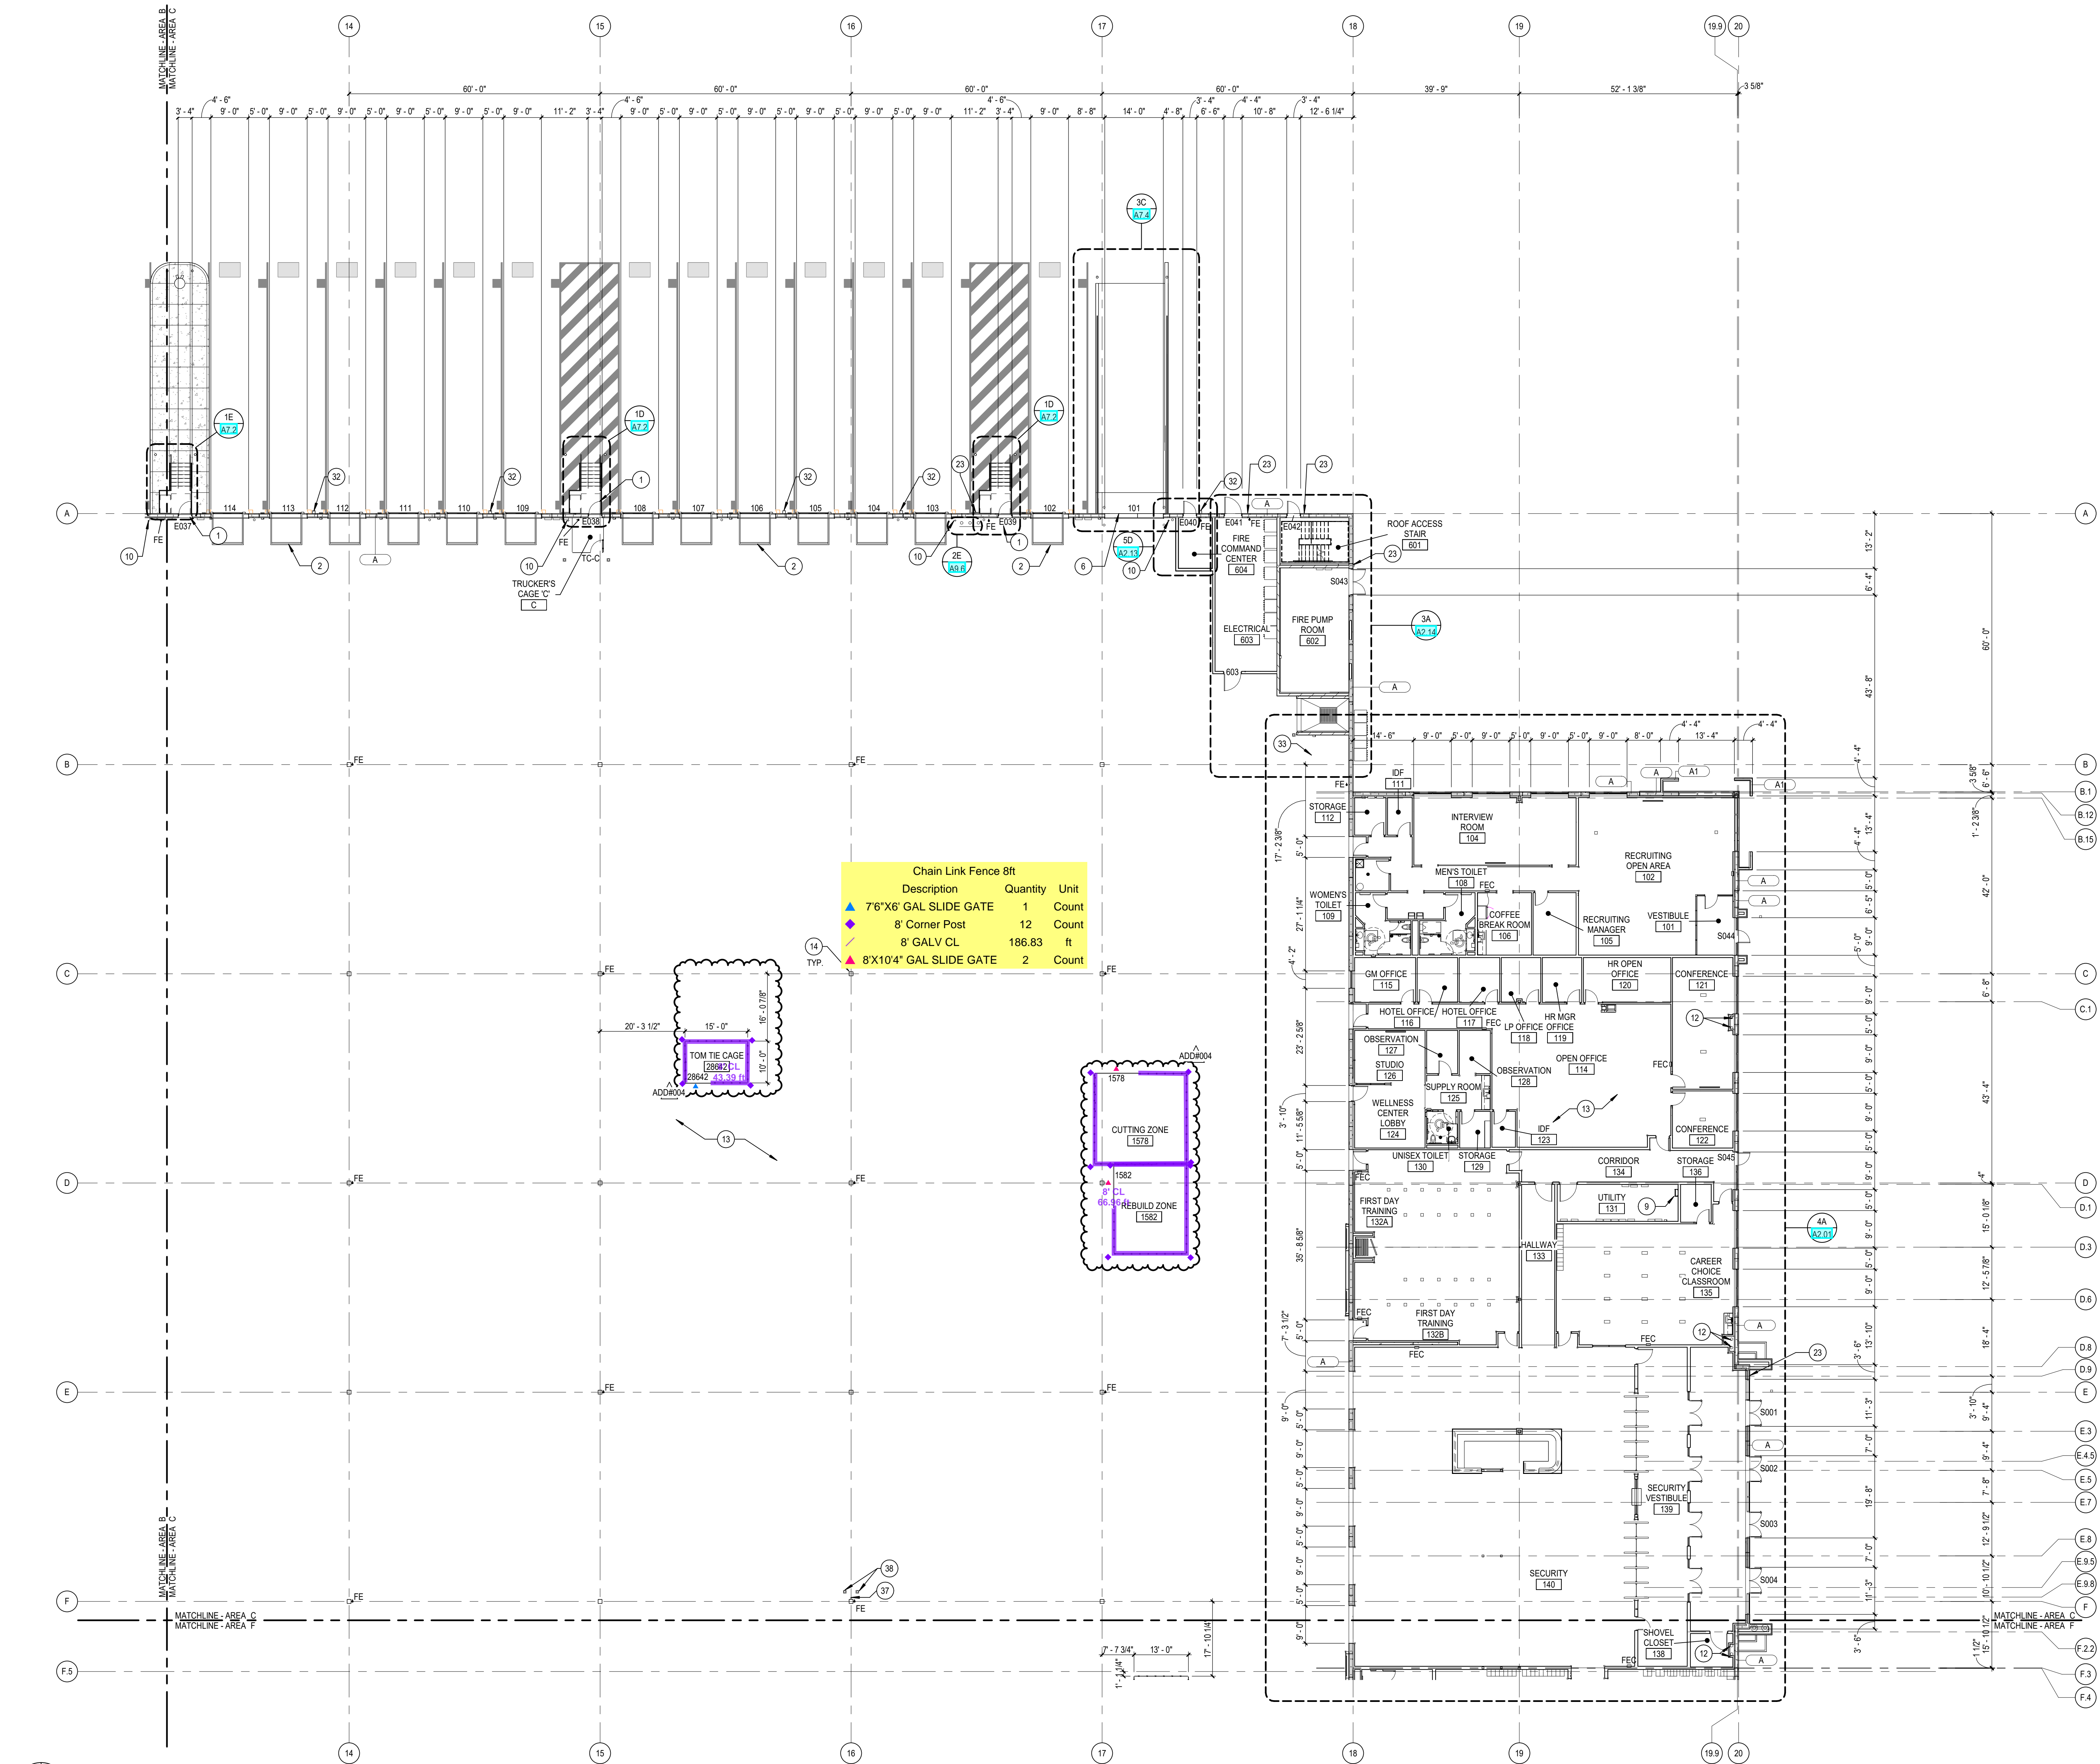

FLOOR PLAN - AREA C
SCALE: 1/16" = 1'-0"


FLOOR PLAN GENERAL NOTES


- BOLLARDS ARE TO BE LOCATED WITHIN THE BUILDING TO PROTECT EXPOSED ELECTRICAL PANELS, ELECTRICAL GEAR, ROOF DRAIN PIPING, WATER LINES, GAS LINES, AND SPRINKLER TEST DRAIN PIPING WITHIN OF WAREHOUSE FLOOR. PROVIDE REPLACEABLE YELLOW SLEEVE.
- PROVIDE BARRIER RAILS TO PROTECT EXPOSED FIRE SPRINKLER RISER. PAINT SAFETY YELLOW.
- PROVIDE 2"x2"x4" HIGH STAINLESS STEEL CORNER GUARDS (TYP.) AT ALL EXPOSED CORNERS, ADHERE TO WALL (NO SCREWS).
- PROVIDE SEALANT WHERE EDGE OF TILE ABUTS GYPSUM.
- REFER TO DE [A4.2/A6.2/B](#) FOR TYPICAL METAL STUD OPENINGS AND CONTROL JOINT DETAILS. GO TO DETERMINE CONSTRUCTION METHODOLOGY.
- REFER TO DE [A4.2/A11.1](#) FOR TYPICAL CHAIR RAIL DETAIL.
- REFER TO SHEET [A11.2](#) FOR FLOOR TRANSITION DETAILS 4A, 4B, 4C, 5A, 5B, AND 5C.

SHEET NOTES

- INSULATED HOLLOW METAL SERVICE DOOR AND FRAME. PAINT SEMI-GLOSS. GROUT FRAME SOLID AT CONCRETE OPENINGS. PAINT INTERIOR SIDE SAFETY RED PT-7.
- INSULATED MANUAL OVERHEAD SECTIONAL DOCK DOOR & DOCK LEVELER EQUIPMENT, WHERE SCHEDULED.
- LINE OF PID PLATFORM ABOVE.
- PID PLATFORM STAIR.
- 6" DIA. CONCRETE-FILLED GALVANIZED STEEL BOLLARDS. PROVIDE REPLACEABLE YELLOW SLEEVE. (TYP.) (SEE DETAILS ON SHEET [A7.2](#)).
- INSULATED MOTORIZED OVERHEAD SECTIONAL DOOR. SEE DOOR AND FRAME SCHEDULE.
- 9" DIA. X 10'-0" LONG CONCRETE-FILLED GALVANIZED STEEL BOLLARDS AT GENERATOR AND TRANSFORMERS. PROVIDE REPLACEABLE YELLOW SLEEVE. (TYP.) SEE [4D50/A7.2](#) FOR DETAILS.
- ROOF LADDER WITH ROOF HATCH ABOVE - SEE [A3.8](#) FOR DETAILS.
- HOSE VALVE CONNECTION - MAINTAIN 12" CLEARANCE AT LATCH SIDE OF DOORS - REFER TO FIRE PROTECTION DRAWINGS.
- FIRE RISER LOCATION - MAINTAIN 12" CLEARANCE AT LATCH SIDE OF DOORS - SEE DETAIL [2E/A9.6](#) - REFER TO FIRE PROTECTION DRAWINGS.
- ROOF DRAIN AND OVERFLOW DRAIN, CENTER BETWEEN OPENINGS. EXTEND OVER FLOW DRAIN THROUGH PRE-CAST. PROVIDE LAMBS TONGUE.
- PROVIDE 15-MIL VAPOR RETARDER UNDER ALL SLABS ON GROUND.
- INTERIOR COLUMN - SHALL BE PAINTED SAFETY YELLOW UP TO 12' A.F.F. AND NO PAINT SHALL BE APPLIED FROM 12' A.F.F. TO UNDERSIDE OF ROOF OR MEZZANINE STRUCTURE. ON COLUMNS WITH FIRE EXTINGUISHERS, PAINT 24" LONG SAFETY RED BAND, ALL 4 SIDES OF COLUMN, 20' A.F.F. PAINT ENTIRE COLUMN SAFETY RED WHERE FIRE HOSE CONNECTIONS ARE LOCATED. REFER TO SHEET [A14.02](#).
- HOSE BIB - REFER TO PLUMBING DRAWINGS. PROVIDE FROST PROOF SILCOCK AT EXTERIOR WALLS. ENSURE ALL PIPING IS WITHIN THE THERMAL ENVELOPE.
- PRE-ENGINEERED EXT. BREAK ROOM.
- WIRE MESH PARTITION TO GO UP TO WITHIN AN INCH OR TWO OF THE BOTTOM OF THE CANOPY. INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
- KNOX BOX MOUNTED 8" ABOVE FINISHED FLOOR.
- COMPACTOR. CONTRACTOR TO COORDINATION WALL OPENING WITH OWNER. PROVIDE DOCK BUMPERS AT COMPACTOR.
- VRC - REFER TO ELECTRICAL FOR POWER REQUIREMENTS.
- MDF SDEN - REFER TO ELECTRICAL DRAWINGS.
- STEEL BARRIER. REFER TO FIRE RISER BARRIERS [2E/A9.6](#).
- COORDINATE CLEARANCE WITH ELECTRICAL.
- MDP CABINET ON HOUSEKEEPING PAD - REFER TO STRUCTURAL DETAIL [9/S4.5](#). COORDINATE WITH PANEL PROVIDER.
- AUGER. CONTRACTOR TO COORDINATE WALL OPENING WITH OWNER.
- DOWNSPOUT.
- EMERGENCY SHOWER - REFER TO PLUMBING.
- REMOTE HOSE VALVE CONNECTION AT INTERIOR COLUMN - COORDINATE WITH OWNER/TERMINANT FOR FINAL LOCATION AND LAYOUT - REFER TO FIRE PROTECTION DRAWINGS.
- SURFACE MOUNTED STEEL BOLLARD. LOCATE SUCH THAT ANCHORS ARE MIN 3" FROM ALL CONCRETE JOINTS - SEE DETAIL [4A/A11.1](#).
- TRANSFORMER - COORDINATE WITH OWNER.
- GENERATOR - REFER TO ELECTRICAL.


KEY PLAN

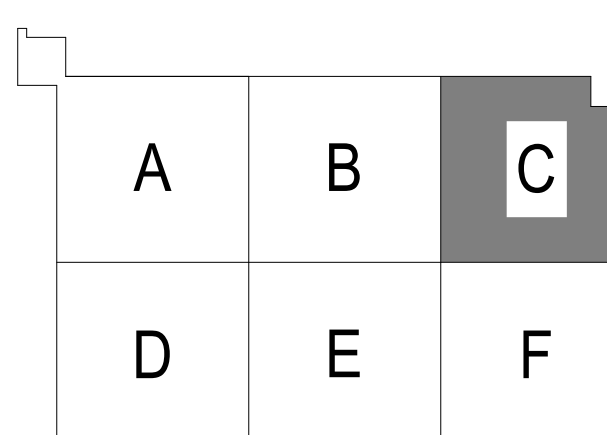



FLOOR PLAN - AREA D

SCALE: 1/16" = 1'-0"

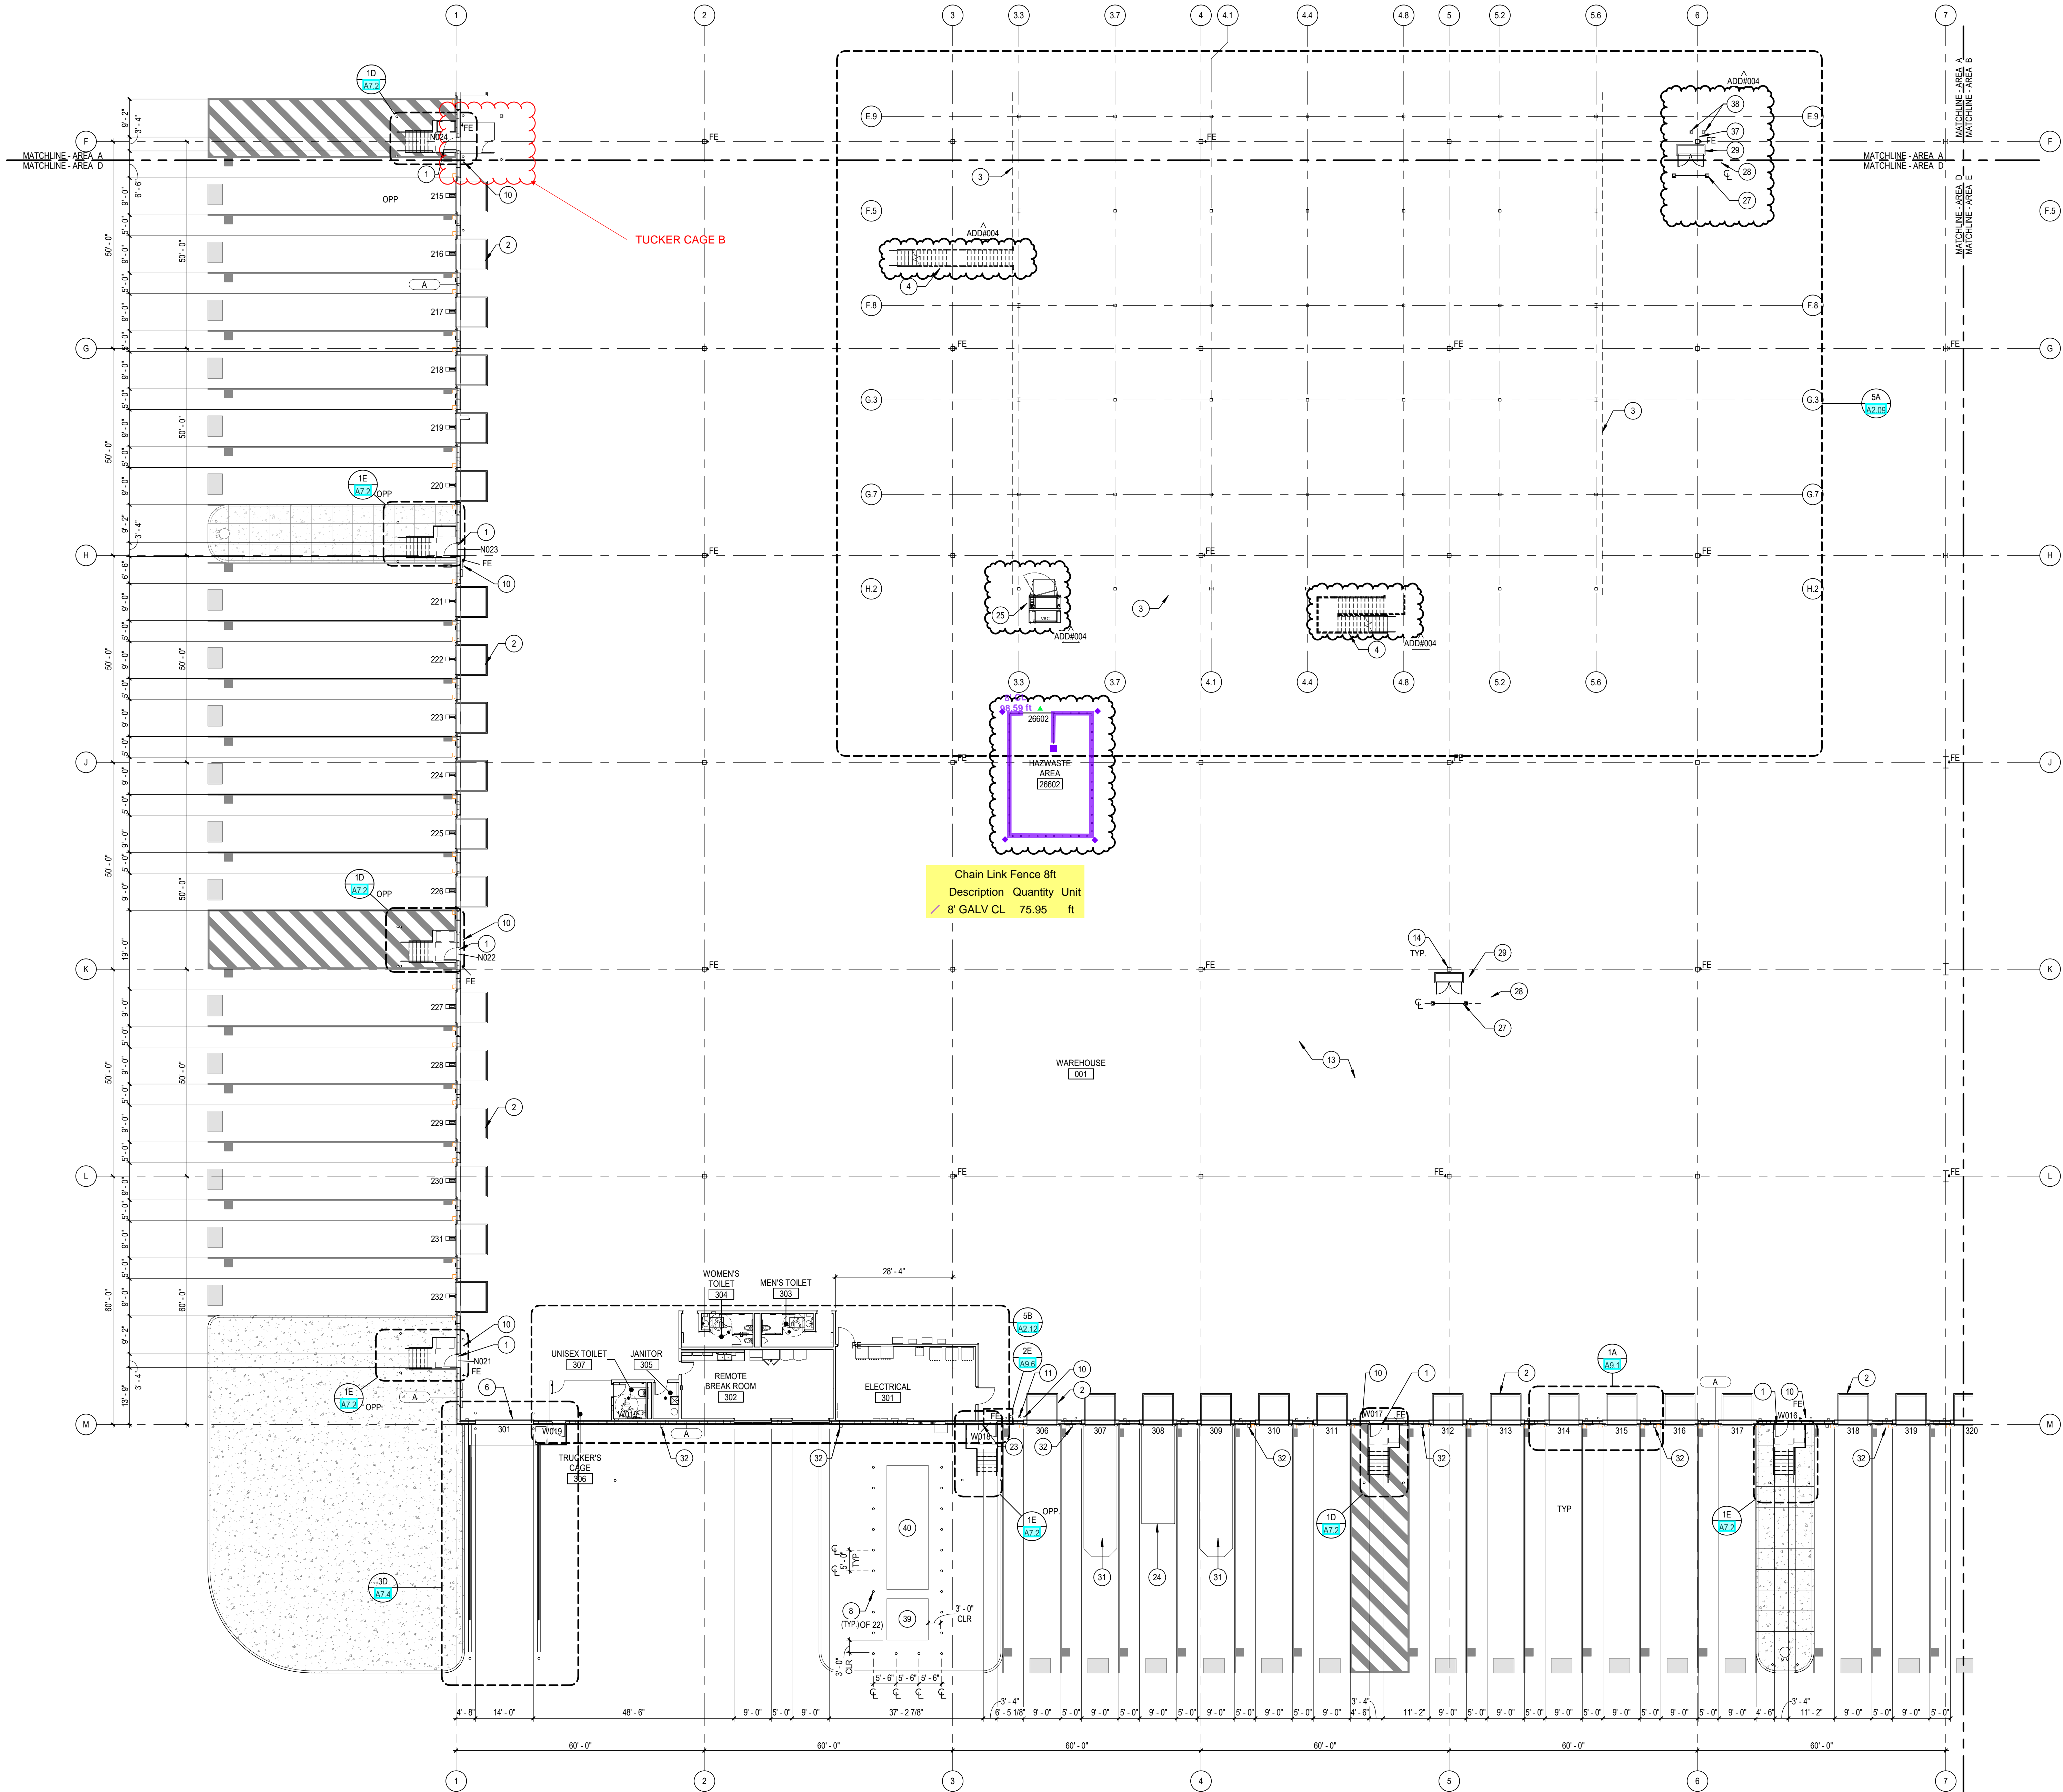

Description	Quantity	Unit
8' GALV CL	75.95	ft


FLOOR PLAN GENERAL NOTES


- BOLLARDS ARE TO BE LOCATED WITHIN THE BUILDING TO PROTECT EXPOSED ELECTRICAL PANELS, ELECTRICAL GEAR, ROOF DRAIN PIPING, WATER LINES, GAS LINES, AND SPRINKLER TEST DRAIN PIPING WITHIN 6" OF WAREHOUSE FLOOR. PROVIDE REPLACEABLE YELLOW SLEEVE.
- PROVIDE BARRIER RAILS TO PROTECT EXPOSED FIRE SPRINKLER RISER. PAINT SAFETY YELLOW.
- PROVIDE 2"x2"x48" HIGH STAINLESS STEEL CORNER GUARDS (TYP.) AT ALL EXPOSED CORNERS. ADHERE TO WALL (NO SCREWS).
- PROVIDE SEALANT WHERE EDGE OF TILE ABUTS GYPSUM.
- OPENINGS AND CONTROL JOINT DETAILS GO TO DETERMINE CONSTRUCTION METHODOLOGY.
- REFER TO DETAIL 201A111 FOR TYPICAL CHAIR RAIL DETAIL.
- REFER TO SHEET A1.1.2 FOR FLOOR TRANSITION DETAILS 4A, 4B, 4C, 5A, 5B, AND 5C.

SHEET NOTES

- INSULATED HOLLOW METAL SERVICE DOOR AND FRAME. PAINT SEMI-GLOSS. GROUT FRAME SOLD AT CONCRETE OPENINGS. PAINT INTERIOR SIDE SAFETY RED P1.7.
- INSULATED MANUAL OVERHEAD SECTIONAL DOCK DOOR & DOCK LEVELER EQUIPMENT, WHERE SCHEDULED.
- LINE OF PID PLATFORM ABOVE.
- PID PLATFORM STAIR.
- 6" DIA. CONCRETE-FILLED GALVANIZED STEEL BOLLARDS. PROVIDE REPLACEABLE YELLOW SLEEVE. (TYP.) SEE DETAILS ON SHEET A1.2.
- INSULATED MOTORIZED OVERHEAD SECTIONAL DOOR. SEE DOOR AND FRAME SCHEDULE.
- 6" DIA. X 10'-0" LONG CONCRETE-FILLED GALVANIZED STEEL BOLLARDS AT GENERATOR AND TRANSFORMERS. PROVIDE REPLACEABLE YELLOW SLEEVE. (TYP.) SEE DETAIL 4DSD A7.2 FOR DETAILS.
- ROOF LADDER WITH ROOF HATCH ABOVE. SEE A5.2 FOR DETAILS.
- HOSE VALVE CONNECTION - MAINTAIN 12" CLEARANCE AT LATCH SIDE OF DOORS - REFER TO FIRE PROTECTION DRAWINGS.
- FIRE RISER LOCATION - MAINTAIN 12" CLEARANCE AT LATCH SIDE OF DOORS - SEE DETAIL 2EA9.6 - REFER TO FIRE PROTECTION DRAWINGS.
- ROOF DRAIN AND OVERFLOW DRAIN, CENTER BETWEEN OPENINGS. EXTEND OVER FLOW DRAIN THROUGH PRE-CAST. PROVIDE LAMBS TONGUE.
- PROVIDE 15-MIL VAPOR RETARDER UNDER ALL SLABS ON GROUND.
- INTERIOR COLUMN - SHALL BE PAINTED SAFETY YELLOW UP TO 12' A.F.F. AND NO PAINT SHALL BE APPLIED FROM 12' A.F.F. TO UNDERSIDE OF ROOF OR MEZZANINE STRUCTURE. ON COLUMNS WITH FIRE EXTINGUISHERS, PAINT 24" LONG SAFETY RED BAND. ALL 4 SIDES OF COLUMN. 20' A.F.F. PAINT ENTIRE COLUMN SAFETY RED WHERE FIRE HOSE CONNECTIONS ARE LOCATED. REFER TO SHEET A1.1.2.
- HOSE BIB - REFER TO PLUMBING DRAWINGS. PROVIDE FROST PROOF SILCOCK AT EXTERIOR WALLS. ENSURE ALL PIPING IS WITHIN THE THERMAL ENVELOPE.
- PRE-ENGINEERED EXT. BREAK ROOM.
- WIRE MESH PARTITION TO GO UP TO WITHIN AN INCH OR TWO OF THE BOTTOM OF THE CANOPY. INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
- KNOX BOX MOUNTED 6' ABOVE FINISHED FLOOR.
- COMPACTOR. CONTRACTOR TO COORDINATION WALL OPENING WITH OWNER. PROVIDE DOCK BUMPER AT COMPACTOR.
- VRC - REFER TO ELECTRICAL FOR POWER REQUIREMENTS.
- MDI SDEN - REFER TO ELECTRICAL DRAWINGS.
- STEEL BARRIER. REFER TO FIRE RISER BARRIERS 2EA9.6.
- COORDINATE CLEARANCE WITH ELECTRICAL.
- MDP CABINET ON HOUSEKEEPING PAD - REFER TO STRUCTURAL DETAIL 9/54.5. COORDINATE WITH PANEL PROVIDER.
- AUGER. CONTRACTOR TO COORDINATE WALL OPENING WITH OWNER.
- DOWNSPOUT.
- EMERGENCY SHOWER - REFER TO PLUMBING.
- REMOTE HOSE VALVE CONNECTION AT INTERIOR COLUMN. COORDINATE WITH OWNER/TEENANT FOR FINAL LOCATION AND LAYOUT - REFER TO FIRE PROTECTION DRAWINGS.
- SURFACE MOUNTED STEEL BOLLARD. LOCATE SUCH THAT ANCHORS ARE MIN 3" FROM ALL CONCRETE JOINTS - SEE DETAIL 8A41.1.
- TRANSFORMER - COORDINATE WITH OWNER.
- GENERATOR - REFER TO ELECTRICAL.

KEY PLAN

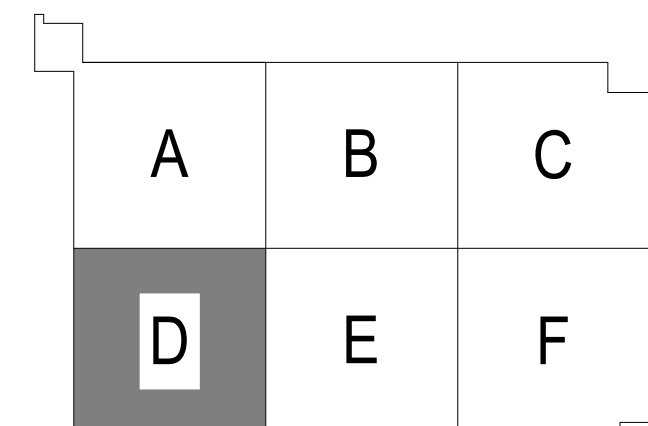

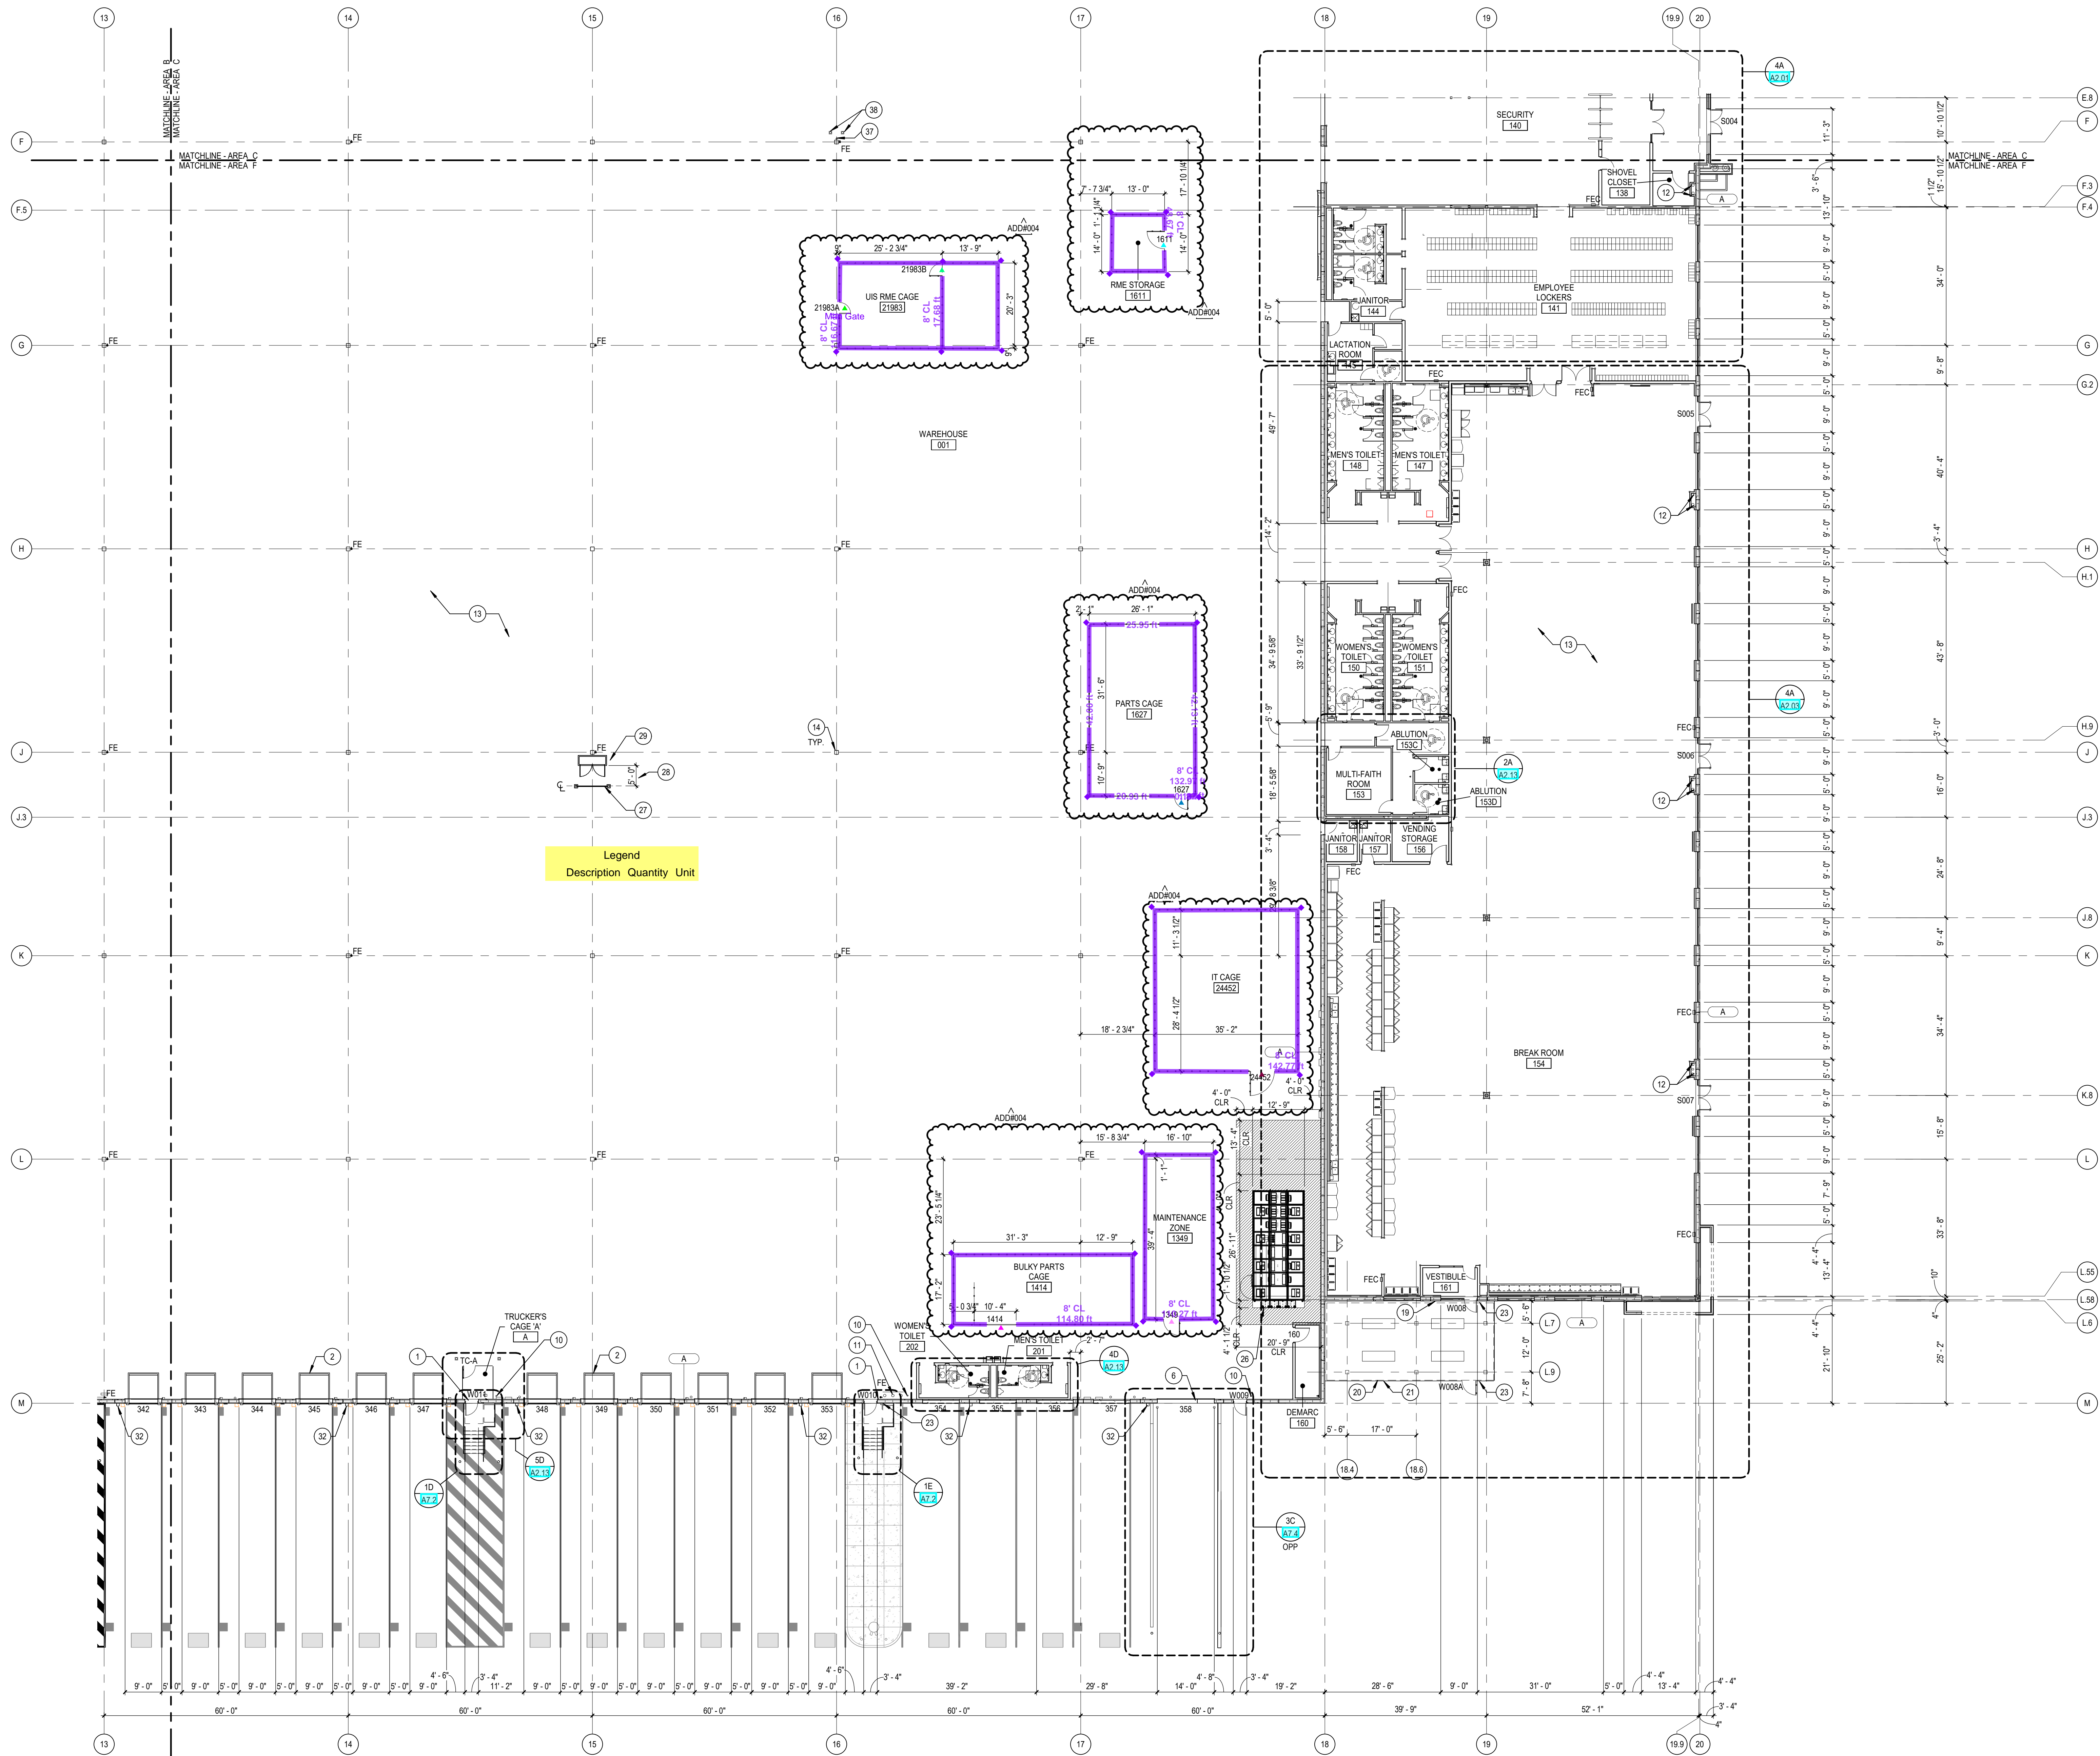

FLOOR PLAN - AREA F
SCALE: 1/16" = 1'-0"

FLOOR PLAN GENERAL NOTES

- BOLLARDS ARE TO BE LOCATED WITHIN THE BUILDING TO PROTECT EXPOSED ELECTRICAL PANELS, ELECTRICAL GEAR, ROOF DRAIN PIPING, WATER LINES, GAS LINES, AND SPRINKLER TEST DRAIN PIPING WITHIN 6" OF WAREHOUSE FLOOR. PROVIDE REPLACEABLE YELLOW SLEEVE.
- PROVIDE BARRIER RAILS TO PROTECT EXPOSED FIRE SPRINKLER RISER - PAINT SAFETY YELLOW.
- PROVIDE 2"x2"x48" HIGH STAINLESS STEEL CORNER GUARDS (TYP.) AT ALL EXPOSED CORNERS, ADHERE TO WALL (NO SCREWS).
- PROVIDE SEALANT WHERE EDGE OF TILE ABUTS GYPSUM. REFER TO DETAIL 2A14.02 FOR TYPICAL METAL STUD OPENINGS AND CONTROL JOINT DETAILS. GO TO DETERMINE CONSTRUCTION METHODOLOGY.
- REFER TO DETAIL 2A14.02 FOR TYPICAL CHAIR RAIL DETAIL.
- REFER TO SHEET A1.12 FOR FLOOR TRANSITION DETAILS 4A, 4B, 4C, 5A, 5B, AND 5C.

SHEET NOTES

- INSULATED HOLLOW METAL SERVICE DOOR AND FRAME. PAINT SEMI-GLOSS. GROUT FRAME SCOLD AT CONCRETE OPENINGS. PAINT INTERIOR SIDE SAFETY RED PT-7.
- INSULATED MANUAL OVERHEAD SECTIONAL DOCK DOOR & DOCK LEVELER EQUIPMENT, WHERE SCHEDULED.
- LINE OF PID PLATFORM ABOVE.
- PID PLATFORM STAIR.
- 6" DIA. CONCRETE-FILLED GALVANIZED STEEL BOLLARDS. PROVIDE REPLACEABLE YELLOW SLEEVE. (TYP.) (SEE DETAILS ON SHEET A1.2).
- INSULATED MOTORIZED OVERHEAD SECTIONAL DOOR. SEE DOOR AND FRAME SCHEDULE.
- 6" DIA. X 16'-0" LONG CONCRETE-FILLED GALVANIZED STEEL BOLLARDS AT GENERATOR AND TRANSFORMERS. PROVIDE REPLACEABLE YELLOW SLEEVE. (TYP.) (SEE DETAIL A1.2 FOR DETAILS).
- ROOF LADDER WITH ROOF HATCH ABOVE - SEE A3.08 FOR DETAILS.
- HOSE VALVE CONNECTION - MAINTAIN 12" CLEARANCE AT LATCH SIDE OF DOORS - REFER TO FIRE PROTECTION DRAWINGS.
- FIRE RISER LOCATION - MAINTAIN 12" CLEARANCE AT LATCH SIDE OF DOORS - SEE DETAIL 2A10.6 - REFER TO FIRE PROTECTION DRAWINGS.
- ROOF DRAIN AND OVERFLOW DRAIN, CENTER BETWEEN OPENINGS. EXTEND OVER FLOW DRAIN THROUGH PRE-CAST. PROVIDE LAMBS TONGUE.
- PROVIDE 15-MIL VAPOR RETARDER UNDER ALL SLABS ON GROUND.
- INTERIOR COLUMN - SHALL BE PAINTED SAFETY YELLOW UP TO 12' A.F.F. AND NO PAINT SHALL BE APPLIED FROM 12' A.F.F. TO UNDERSIDE OF ROOF OR MEZZANINE STRUCTURE. ON COLUMNS WITH FIRE EXTINGUISHERS, PAINT 24" LONG SAFETY RED BAND. ALL 4 SIDES OF COLUMN. 20' A.F.F. PAINT ENTIRE COLUMN SAFETY RED WHERE FIRE HOSE CONNECTIONS ARE LOCATED. REFER TO SHEET A1.14.02.
- HOSE BIB - REFER TO PLUMBING DRAWINGS. PROVIDE FROST PROOF SILLCOCK AT EXTERIOR WALLS. ENSURE ALL PIPING IS WITHIN THE THERMAL ENVELOPE.
- PRE-ENGINEERED EXT. BREAK ROOM.
- WIRE MESH PARTITION TO GO UP TO WITHIN AN INCH OR TWO OF THE BOTTOM OF THE CANOPY. INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
- KNOX BOX MOUNTED 6' ABOVE FINISHED FLOOR.
- COMPACTOR. CONTRACTOR TO COORDINATE WALL OPENING WITH OWNER. PROVIDE DOCK BUMPERS AT COMPACTOR.
- VRC - REFER TO ELECTRICAL FOR POWER REQUIREMENTS.
- MOF SDBN - REFER TO ELECTRICAL DRAWINGS.
- STEEL BARRIER - REFER TO FIRE RISER BARRIERS 2A10.6.
- COORDINATE CLEARANCE WITH ELECTRICAL.
- MOP CABINET ON HOUSEKEEPING PAD - REFER TO STRUCTURAL DETAIL 9/54.5. COORDINATE WITH PANEL PROVIDER.
- AUCER. CONTRACTOR TO COORDINATE WALL OPENING WITH OWNER.
- DOWNSPOUT.
- EMERGENCY SHOWER - REFER TO PLUMBING.
- REMOTE HOSE VALVE CONNECTION AT INTERIOR COLUMN - COORDINATE WITH OWNER/RENTAL FOR FINAL LOCATION AND LAYOUT - REFER TO FIRE PROTECTION DRAWINGS.
- SURFACE MOUNTED STEEL BOLLARD. LOCATE SUCH THAT ANCHORS ARE MIN 3" FROM ALL CONCRETE JOINTS - SEE DETAIL 4A13.11.
- TRANSFORMER - COORDINATE WITH OWNER.
- GENERATOR - REFER TO ELECTRICAL.

KEY PLAN

