

Pracownia systemów i urządzeń sieciowych

Temat: Urządzenia Sieciowe



Imię i Nazwisko

klasa/grupa/ rok szk.

Ksawery Zelek
Adrian Starostka

2 TI 4/4
2021/2022

STACJA ROBOCZA

Ipconfig /all

```
Administrator: Windows PowerShell
Windows IP Configuration

Host Name . . . . . : 24p-00
Primary Dns Suffix . . . . . :
Node Type . . . . . : Hybrid
IP Routing Enabled. . . . . : No
WINS Proxy Enabled. . . . . : No

Ethernet adapter LAN1:

Connection-specific DNS Suffix . :
Description . . . . . : Intel(R) Ethernet Connection (2) I219-V
Physical Address. . . . . : 4C-CC-6A-D7-DA-60
Dhcp Enabled. . . . . : No
Autoconfiguration Enabled . . . . : Yes
Link-local IPv6 Address . . . . . : fe80::8070:8707:a851:200c%13(Preferred)
IPv4 Address. . . . . : 192.168.0.120(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.0.150
Dhcpv6 IAID . . . . . : 38587498
Dhcpv6 Client DUID. . . . . : 00-01-00-01-29-AA-92-FD-4C-CC-6A-D7-DA-60
DNS Servers . . . . . : 192.168.0.150
NetBIOS over Tcpip. . . . . : Enabled

Ethernet adapter Ethernet 2:

Connection-specific DNS Suffix . :
Description . . . . . : VirtualBox Host-Only Ethernet Adapter
Physical Address. . . . . : 0A-00-27-00-00-00
Dhcp Enabled. . . . . : No
Autoconfiguration Enabled . . . . : Yes
Link-local IPv6 Address . . . . . : fe80::c94:2d6:8539:57a8%11(Preferred)
IPv4 Address. . . . . : 192.168.56.1(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . :
Dhcpv6 IAID . . . . . : 285868071
Dhcpv6 Client DUID. . . . . : 00-01-00-01-29-AA-92-FD-4C-CC-6A-D7-DA-60
DNS Servers . . . . . : fec0:0:0:ffff::151
                          fec0:0:0:ffff::251
                          fec0:0:0:ffff::351
NetBIOS over Tcpip. . . . . : Enabled

Ethernet adapter LAN2:

Connection-specific DNS Suffix . :
Description . . . . . : Realtek PCIe GbE Family Controller
Physical Address. . . . . : 00-E0-4C-68-37-94
Dhcp Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes
Link-local IPv6 Address . . . . . : fe80::6440:9324:95a9:c823%0(Preferred)
IPv4 Address. . . . . : 192.168.0.150(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Lease Obtained. . . . . : wtorek, 1 marca 2022 09:26:21
Lease Expires . . . . . : piątek, 7 kwietnia 2022 15:56:13
Default Gateway . . . . . : 192.168.0.150
Dhcp Server . . . . . : 192.168.0.150
Dhcpv6 IAID . . . . . : 503373006
Dhcpv6 Client DUID. . . . . : 00-01-00-01-29-AA-92-FD-4C-CC-6A-D7-DA-60
DNS Servers . . . . . : 192.168.0.150
                          192.168.0.150
NetBIOS over Tcpip. . . . . : Enabled

C:\WINDOWS\system32>
```

Stacja robocza -> Router

```
Administrator: Wiersz polecenia
C:\WINDOWS\system32>ping 192.168.0.150

Pinging 192.168.0.150 with 32 bytes of data:
Reply from 192.168.0.150: bytes=32 time=0ms TTL=64
Reply from 192.168.0.150: bytes=32 time=0ms TTL=64
Reply from 192.168.0.150: bytes=32 time=0ms TTL=64
Reply from 192.168.0.150: bytes=32 time=0ms TTL=64

Ping statistics for 192.168.0.150:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\WINDOWS\system32>
```

Stacja robocza -> Switch 1

```
Administrator: Wiersz polecenia
C:\WINDOWS\system32>ping 192.168.0.160

Pinging 192.168.0.160 with 32 bytes of data:
Reply from 192.168.0.160: bytes=32 time=1ms TTL=64
Reply from 192.168.0.160: bytes=32 time=1ms TTL=64
Reply from 192.168.0.160: bytes=32 time=1ms TTL=64
Reply from 192.168.0.160: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.160:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms
C:\WINDOWS\system32>
```

Stacja robocza -> Switch 2

```
Administrator: Wiersz polecenia
C:\WINDOWS\system32>ping 192.168.0.170

Pinging 192.168.0.170 with 32 bytes of data:
Reply from 192.168.0.170: bytes=32 time=1ms TTL=64
Reply from 192.168.0.170: bytes=32 time=1ms TTL=64
Reply from 192.168.0.170: bytes=32 time=1ms TTL=64
Reply from 192.168.0.170: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.170:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\WINDOWS\system32>
```

Stacja robocza -> Serwer

```
Administrator: Wiersz polecenia
C:\WINDOWS\system32>ping 192.168.0.110

Pinging 192.168.0.110 with 32 bytes of data:
Reply from 192.168.0.110: bytes=32 time=0ms TTL=128
Reply from 192.168.0.110: bytes=32 time=0ms TTL=128
Reply from 192.168.0.110: bytes=32 time=0ms TTL=128
Reply from 192.168.0.110: bytes=32 time=0ms TTL=128

Ping statistics for 192.168.0.110:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\WINDOWS\system32>
```

SERWER

Ipconfig /all

```
Wiersz polecenia
Windows IP Configuration

Host Name . . . . . : 24p-00
Primary DNS Suffix . . . . . :
Node Type . . . . . : Hybrid
IP Routing Enabled. . . . . : No
WINS Proxy Enabled. . . . . : No

Ethernet adapter LAN:

Connection-specific DNS Suffix . :
Description . . . . . : Intel(R) Ethernet Connection (2) I219-V
Physical Address. . . . . : 4C-CC-6A-F5-A1-5D
Dhcp Enabled. . . . . : No
Autoconfiguration Enabled . . . : Yes
Link-local IPv6 Address . . . . : fe80::d0e2:386a:1a0e:2540%13(Preferred)
IPv4 Address. . . . . : 192.168.0.110(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.0.150
Dhcpv6 IAD . . . . . : 38687490
Dhcpv6 Client DUID. . . . . : 00-01-00-01-29-AA-92-A7-4C-CC-6A-F5-A1-5D
DNS Servers . . . . . : 192.168.0.150
NetBIOS over Tcpip. . . . . : Enabled

Ethernet adapter Ethernet 2:

Connection-specific DNS Suffix . :
Description . . . . . : VirtualBox Host Only Ethernet Adapter
Physical Address. . . . . : 0A-00-27-00-00-00
Dhcp Enabled. . . . . : No
Autoconfiguration Enabled . . . : Yes
Link-local IPv6 Address . . . . : fe80::c904:2db6:8539:57a8%11(Preferred)
IPv4 Address. . . . . : 192.168.56.1(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . :
Dhcpv6 IAD . . . . . : 263808071
Dhcpv6 Client DUID. . . . . : 00-01-00-01-29-AA-92-A7-4C-CC-6A-F5-A1-5D
DNS Servers . . . . . : fec0:0:0:ffff::1%1
                          fec0:0:0:ffff::2%1
                          fec0:0:0:ffff::3%1
NetBIOS over Tcpip. . . . . : Enabled

Ethernet adapter WAN:

Connection-specific DNS Suffix . :
Description . . . . . : TP-Link Gigabit PCI Express Adapter
Physical Address. . . . . : C4-de-1f-04-9a-02
Dhcp Enabled. . . . . : Yes
Autoconfiguration Enabled . . . : Yes
Link-local IPv6 Address . . . . : fe80::8881:1d31:d868:1984%15(Preferred)
IPv4 Address. . . . . : 192.168.0.180(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Lease Obtained. . . . . : wtorek, 1 marca 2022 09:26:22
Lease Expires . . . . . : piątek, 7 kwietnia 2158 15:56:30
Default Gateway . . . . . : 192.168.0.150
Dhcp Server . . . . . : 192.168.0.150
Dhcpv6 IAD . . . . . : 264531487
Dhcpv6 Client DUID. . . . . : 00-01-00-01-29-AA-92-A7-4C-CC-6A-F5-A1-5D
DNS Servers . . . . . : 192.168.0.150
NetBIOS over Tcpip. . . . . : Enabled

C:\Users\user>
```

Server -> Router

```
Wiersz polecenia

C:\Users\user>ping 192.168.0.150

Pinging 192.168.0.150 with 32 bytes of data:
Reply from 192.168.0.150: bytes=32 time=1ms TTL=64
Reply from 192.168.0.150: bytes=32 time=1ms TTL=64
Reply from 192.168.0.150: bytes=32 time=1ms TTL=64
Reply from 192.168.0.150: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.150:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milliseconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\user>
```

Server -> Switch 1

```
Wiersz polecenia
C:\Users\user>ping 192.168.0.160

Pinging 192.168.0.160 with 32 bytes of data:
Reply from 192.168.0.160: bytes=32 time=3ms TTL=64
Reply from 192.168.0.160: bytes=32 time=1ms TTL=64
Reply from 192.168.0.160: bytes=32 time=1ms TTL=64
Reply from 192.168.0.160: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.160:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 3ms, Average = 1ms

C:\Users\user>
```

Server -> Switch 2

```
Wiersz polecenia
C:\Users\user>ping 192.168.0.170

Pinging 192.168.0.170 with 32 bytes of data:
Reply from 192.168.0.170: bytes=32 time=1ms TTL=64
Reply from 192.168.0.170: bytes=32 time=1ms TTL=64
Reply from 192.168.0.170: bytes=32 time=1ms TTL=64
Reply from 192.168.0.170: bytes=32 time=5ms TTL=64

Ping statistics for 192.168.0.170:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 4ms

C:\Users\user>
```

Serwer -> Stacja Robocza

```
Wiersz polecenia
C:\Users\user>ping 192.168.0.120

Pinging 192.168.0.120 with 32 bytes of data:
Reply from 192.168.0.120: bytes=32 time=0ms TTL=128
Reply from 192.168.0.120: bytes=32 time=0ms TTL=128
Reply from 192.168.0.120: bytes=32 time=0ms TTL=128
Reply from 192.168.0.120: bytes=32 time=0ms TTL=128

Ping statistics for 192.168.0.120:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\user>
```

USTAWIENIA URZĄDZEŃ SIECIOWYCH

Router

The screenshot shows the TP-Link Archer C1200 web interface. The left sidebar contains navigation options: Stan, Sieć (selected), Internet, LAN, IPTV/VLAN, Serwer DHCP, Dynamiczny DNS, Routing zaawansowany, Tryb pracy, Sieć bezprzewodowa, Sieć dla gości, Przekierowanie portów, Ustawienia USB, Kontrola rodzicielska, QoS, and Zabezpieczenia. The main content area is titled 'Szybka konfiguracja' and 'Zaawansowane'. The 'Serwer DHCP' section is active, showing the 'Włącz serwer DHCP' checkbox checked. Below it, the 'Pula adresów IP' is set to 192.168.0.100 - 192.168.0.199, and the 'Czas przydzielenia adresu' is set to 20 minut. The 'Brama domyślna' is 192.168.0.150, and the 'Preferowany DNS' and 'Alternatywny DNS' are both empty. A 'Zapisz' button is at the bottom right. Below the DHCP settings, there is a 'Rezerwacja adresów' section with a table of reserved addresses. The table has columns: ID, Adres MAC, Zarezerwowany adres IP, Opis, Stan, and Zmień. Two entries are shown: ID 1 with MAC C4-6E-1F-04-9A-62 and IP 192.168.0.180, and ID 2 with MAC 00-E0-4C-68-37-94 and IP 192.168.0.190. Below this is a 'Lista klientów DHCP' section with a table of clients. The table has columns: ID, Nazwa klienta, Adres MAC, Przydzielone IP, and Czas przydzielenia. Two entries are shown: ID 1 with name 24p-00, MAC C4-6E-1F-04-9A-62, IP 192.168.0.170, and time 1:51:5, and ID 2 with name --, MAC 00-E0-4C-68-37-94, IP 192.168.0.120, and time 1:51:2. The footer shows the firmware version 2.0.2 Build 20190118 rel.38979 (EU) and the device version Archer C1200 v2.0.

Wireless Router Archer C1200

Niebezpieczona | 192.168.0.150/webpages/index.1516243669548.html

tp-link

Szybka konfiguracja Podstawowe Zaawansowane

Polski

Diody Wyloguj Resetuj

Stan

Sieć

- Internet
- LAN
- IPTV/VLAN
- Serwer DHCP
- Dynamiczny DNS
- Routing zaawansowany

Tryb pracy

Sieć bezprzewodowa

Sieć dla gości

Przekierowanie portów

Ustawienia USB

Kontrola rodzicielska

QoS

Zabezpieczenia

Serwer DHCP: ☒ Włącz serwer DHCP

Pula adresów IP: 192.168.0.100 - 192.168.0.199

Czas przydzielenia adresu: 20 minut. (1-2880. Domyślna wartość to 120.)

Brama domyślna: 192.168.0.150 (Opcjonalnie)

Preferowany DNS: (Opcjonalnie)

Alternatywny DNS: (Opcjonalnie)

Zapisz

Rezerwacja adresów

Dodaj Kasuj

ID	Adres MAC	Zarezerwowany adres IP	Opis	Stan	Zmień
1	C4-6E-1F-04-9A-62	192.168.0.180	---	📍	✎ 🗑
2	00-E0-4C-68-37-94	192.168.0.190	---	📍	✎ 🗑

Lista klientów DHCP

Lista klientów: 2

Odśwież

ID	Nazwa klienta	Adres MAC	Przydzielone IP	Czas przydzielenia
1	24p-00	C4-6E-1F-04-9A-62	192.168.0.170	1:51:5
2	--	00-E0-4C-68-37-94	192.168.0.120	1:51:2

Wersja firmware: 2.0.2 Build 20190118 rel.38979 (EU) Wersja sprzętowa: Archer C1200 v2.0 Wyłącz Ustawia

09:27 01.03.2022

The screenshot shows the TP-Link Archer C1200 web interface. The left sidebar contains navigation options: Stan, Sieć (selected), Internet, LAN, IPTV/VLAN, Serwer DHCP, Dynamiczny DNS, Routing zaawansowany, Tryb pracy, Sieć bezprzewodowa, Sieć dla gości, Przekierowanie portów, Ustawienia USB, Kontrola rodzicielska, QoS, and Zabezpieczenia. The main content area is titled 'Szybka konfiguracja' and 'Zaawansowane'. The 'LAN' section is active, showing the 'Adres MAC' as B0-4E-26-D6-58-54, the 'Adres IP' as 192.168.0.150, and the 'Maska podsieci' as 255.255.255.0. A 'Zapisz' button is at the bottom right. The footer shows the firmware version 2.0.2 Build 20190118 rel.38979 (EU) and the device version Archer C1200 v2.0.

Wireless Router Archer C1200

Niebezpieczona | 192.168.0.150/webpages/index.1516243669548.html

tp-link

Szybka konfiguracja Podstawowe Zaawansowane

Polski

Diody Wyloguj Resetuj

LAN

Adres MAC: B0-4E-26-D6-58-54

Adres IP: 192.168.0.150

Maska podsieci: 255.255.255.0

Zapisz

Wersja firmware: 2.0.2 Build 20190118 rel.38979 (EU) Wersja sprzętowa: Archer C1200 v2.0 Wyłącz Ustawia

09:32 01.03.2022

Switch 1

The screenshot shows the TP-LINK TL-SG105E web interface. The left sidebar contains a menu with the following items: System, Switching, Monitoring, VLAN, QoS, Save Config, and Logout. The main content area displays the 'System Info' page, which includes a table with the following information:

System Info	
Device Description	TL-SG105E
MAC Address	B0-4E-28-F8-D9-C9
IP Address	192.168.0.180
Subnet Mask	255.255.255.0
Default Gateway	0.0.0.0
Firmware Version	1.0.0 Build 20160715 Rel.38605
Hardware Version	TL-SG105E 3.0

Below the table, there is a 'Device Description' field with the value 'TL-SG105E' and an 'Apply' button. A note at the bottom states: 'Note: The length of device description should not be more than 32 characters.'

Copyright © 2016 TP-LINK Technologies Co., Ltd. All rights reserved.

Switch 2

The screenshot shows the TP-LINK T1600G-28TS web interface. The left sidebar contains a menu with the following items: System, Switching, VLAN, Spanning Tree, Multicast, Routing, Interface, Routing Table, Static Routing, DHCP Relay, ARP, QoS, ACL, Network Security, SNMP, LLDP, Maintenance, Save Config, Index, and Logout. The main content area displays the 'Interface Config' page, which includes a 'Creating Interface' section and an 'Interface List' table.

Creating Interface

Interface ID: (1-4094)

IP Address Mode: ☒ None ☐ Static ☐ DHCP ☐ BOOTP

IP Address: (Format: 192.168.0.1)

Subnet Mask: (Format: 255.255.255.0)

Admin Status: ☒ Enable ☐ Disable

Interface Name: (Optional, 1-16 characters)

Interface List

Select	ID	Mode	IP Address	Subnet Mask	Interface Name	Status	Operation
☐	Vlan1	Static	192.168.0.170	255.255.255.0		Up	Edit Edit IPv6 Detail



Interface Count: 1

Note: The addresses of different interfaces can't be the same.

Copyright © 2016 TP-LINK Technologies Co., Ltd. All rights reserved.

VLAN

ZADANIE 1

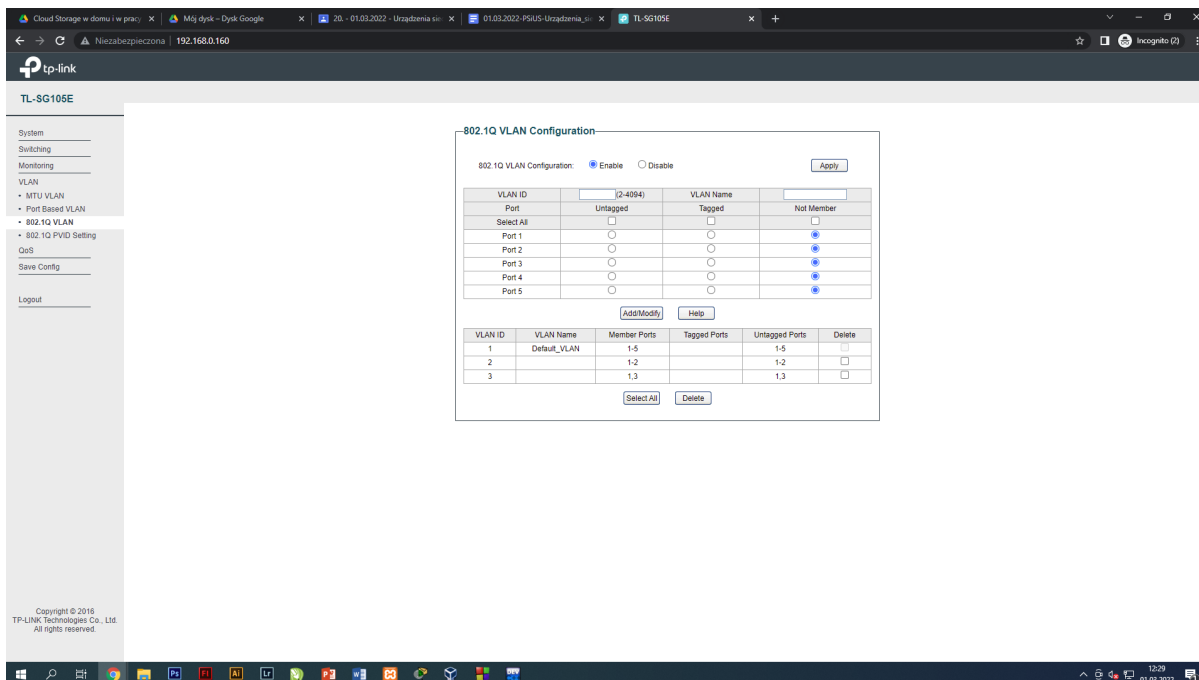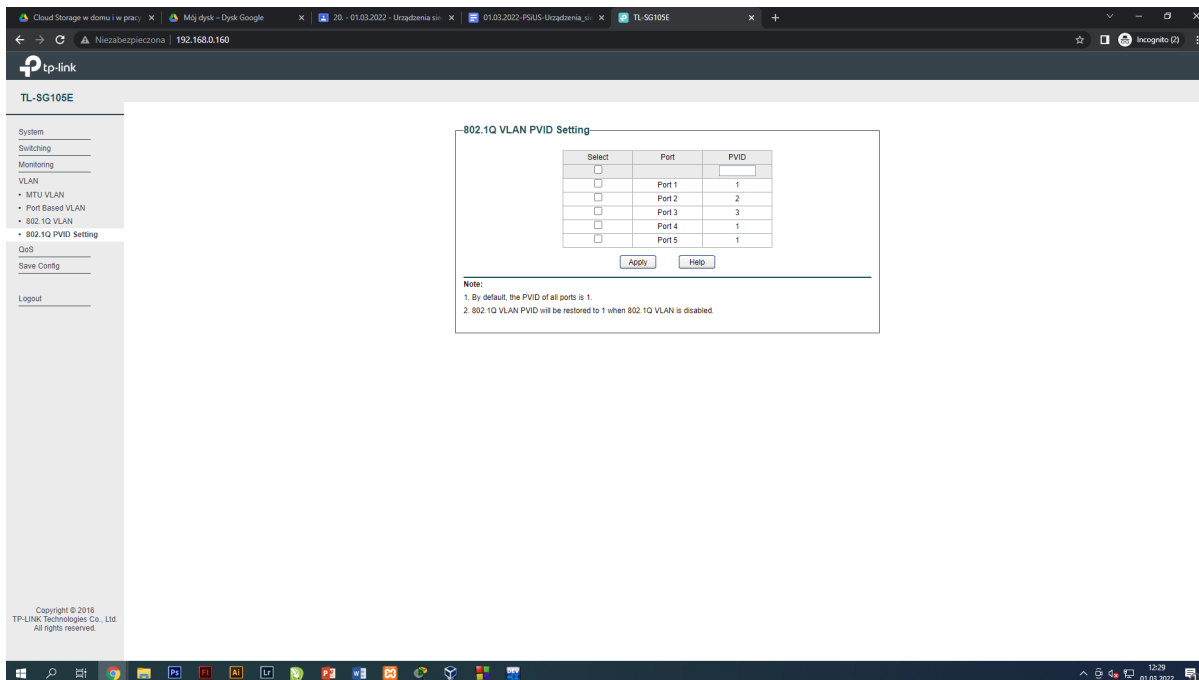

ZADANIE 2

PINGI Stacja Robocza

```
Wiersz polecenia
Microsoft Windows [Version 10.0.18363.1350]
(c) 2019 Microsoft Corporation. Wszelkie prawa zastrzeżone.

C:\Users\User>ping 192.168.0.110

Pinging 192.168.0.110 with 32 bytes of data:
Reply from 192.168.0.120: Destination host unreachable.
Reply from 192.168.0.120: Destination host unreachable.
Reply from 192.168.0.120: Destination host unreachable.
Reply from 192.168.0.120: Destination host unreachable.

Ping statistics for 192.168.0.110:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
C:\Users\User>ping 192.168.0.150

Pinging 192.168.0.150 with 32 bytes of data:
Reply from 192.168.0.150: bytes=32 time=1ms TTL=64
Reply from 192.168.0.150: bytes=32 time=1ms TTL=64
Reply from 192.168.0.150: bytes=32 time=1ms TTL=64
Reply from 192.168.0.150: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.150:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\Users\User>ping 192.168.0.160

Pinging 192.168.0.160 with 32 bytes of data:
Reply from 192.168.0.160: bytes=32 time=1ms TTL=64
Reply from 192.168.0.160: bytes=32 time=1ms TTL=64
Reply from 192.168.0.160: bytes=32 time=1ms TTL=64
Reply from 192.168.0.160: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.160:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms
C:\Users\User>
```

PINGI Serwer

```
Wiersz polecenia
Microsoft Windows [Version 10.0.18363.1350]
(c) 2019 Microsoft Corporation. Wszelkie prawa zastrzeżone.

C:\Users\User>ping 192.168.0.120

Pinging 192.168.0.120 with 32 bytes of data:
Control-C
^C
C:\Users\User>ping 192.168.0.150

Pinging 192.168.0.150 with 32 bytes of data:
Reply from 192.168.0.150: bytes=32 time=1ms TTL=64
Reply from 192.168.0.150: bytes=32 time=1ms TTL=64
Reply from 192.168.0.150: bytes=32 time=1ms TTL=64
Reply from 192.168.0.150: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.150:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\Users\User>
```

Serwer 1 -> Stacja robocza 2

```
Wiersz polecenia
C:\Users\user>ping 192.168.0.141

Pinging 192.168.0.141 with 32 bytes of data:
Reply from 192.168.0.141: bytes=32 time=1ms TTL=128
Reply from 192.168.0.141: bytes=32 time=1ms TTL=128
Reply from 192.168.0.141: bytes=32 time=1ms TTL=128
Reply from 192.168.0.141: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.0.141:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\user>
```

Stacja Robocza 2 -> Serwer 1

```
Wiersz polecenia
Microsoft Windows [Version 10.0.18363.1358]
(c) 2019 Microsoft Corporation. Wszelkie prawa zastrzeżone.

C:\Users\user>ping 192.168.0.110

Pinging 192.168.0.110 with 32 bytes of data:
Reply from 192.168.0.110: bytes=32 time=1ms TTL=128
Reply from 192.168.0.110: bytes=32 time=1ms TTL=128
Reply from 192.168.0.110: bytes=32 time=1ms TTL=128
Reply from 192.168.0.110: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.0.110:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\user>
```

Konfiguracja Switcha

B

The screenshot shows the TP-Link TL-SG105E web interface. The left sidebar contains a navigation menu with the following items: System, Switching, Monitoring, VLAN, MTU VLAN, Port Based VLAN, 802.1Q VLAN, 802.1Q PVID Setting, QoS, Save Config, and Logout. The main content area is titled "802.1Q VLAN Configuration". It features a toggle switch for "802.1Q VLAN Configuration" set to "Enable". Below this is a table for configuring VLANs. The table has columns for "VLAN ID", "VLAN Name", "Member Ports", "Tagged Ports", "Untagged Ports", and "Delete". The "VLAN ID" column has a dropdown menu showing "(2-4094)". The "VLAN Name" column has a text input field. The "Member Ports" column has a dropdown menu showing "1-5". The "Tagged Ports" column has a dropdown menu showing "1-5". The "Untagged Ports" column has a dropdown menu showing "1-5". The "Delete" column has a checkbox. The table contains four rows of data. Below the table are buttons for "Add/Modify" and "Help".

VLAN ID	VLAN Name	Member Ports	Tagged Ports	Untagged Ports	Delete
1	Default_VLAN	1-5		1-5	☐
2		1-2,4		1-2,4	☐
3		1,3-4		1,3-4	☐
4		1-4		1-4	☐

Buttons: Add/Modify, Help

The screenshot shows the TP-Link TL-SG105E web interface. The left sidebar contains a navigation menu with the following items: System, Switching, Monitoring, VLAN, MTU VLAN, Port Based VLAN, 802.1Q VLAN, 802.1Q PVID Setting, QoS, Save Config, and Logout. The main content area is titled "802.1Q VLAN PVID Setting". It features a table for configuring PVID settings. The table has columns for "Select", "Port", and "PVID". The "Select" column has a checkbox. The "Port" column has a dropdown menu showing "Port 1", "Port 2", "Port 3", "Port 4", and "Port 5". The "PVID" column has a text input field. The table contains five rows of data. Below the table are buttons for "Apply" and "Help".

Select	Port	PVID
☐	Port 1	1
☐	Port 2	2
☐	Port 3	3
☐	Port 4	1
☐	Port 5	1

Buttons: Apply, Help

Note:
1. By default, the PVID of all ports is 1.
2. 802.1Q VLAN PVID will be restored to 1 when 802.1Q VLAN is disabled.