

Pracownia systemów i urządzeń sieciowych

Temat: VLANy na przełącznikach i serwer DHCP na routerze

	Imię i Nazwisko	klasa/grupa/ rok szk.
	Ksawery Zelek	II TI / 4/4 2021/2022

POŁĄCZENIA URZĄDZEŃ BEZ PVID I VLANÓW

Połączenie S -> ST , S -> Router, Ipconfig i działanie Youtube

```
Więcej poleceń
C:\Users\user>ping 192.168.0.10

Pinging 192.168.0.10 with 32 bytes of data:
Reply from 192.168.0.10: bytes=32 time=1ms TTL=64
Reply from 192.168.0.10: bytes=32 time=1ms TTL=64
Reply from 192.168.0.10: bytes=32 time=1ms TTL=64
Reply from 192.168.0.10: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\user>ping 192.168.0.20

Pinging 192.168.0.20 with 32 bytes of data:
Reply from 192.168.0.20: bytes=32 time=3ms TTL=64
Reply from 192.168.0.20: bytes=32 time=1ms TTL=64
Reply from 192.168.0.20: bytes=32 time=1ms TTL=64
Reply from 192.168.0.20: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 3ms, Average = 1ms

C:\Users\user>ping 192.168.0.30

Pinging 192.168.0.30 with 32 bytes of data:
Reply from 192.168.0.30: bytes=32 time=4ms TTL=64
Reply from 192.168.0.30: bytes=32 time=1ms TTL=64
Reply from 192.168.0.30: bytes=32 time=1ms TTL=64
Reply from 192.168.0.30: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.30:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 4ms, Average = 1ms

C:\Users\user>ping 192.168.0.50

Pinging 192.168.0.50 with 32 bytes of data:
Reply from 192.168.0.50: bytes=32 time=1ms TTL=128
Reply from 192.168.0.50: bytes=32 time=1ms TTL=128
Reply from 192.168.0.50: bytes=32 time=1ms TTL=128
Reply from 192.168.0.50: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.0.50:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\user>ipconfig


Windows IP Configuration

Ethernet adapter LAN1:

    Connection-specific DNS Suffix . . . : 
    Link-local IPv6 Address . . . . . : fe80::d18d:b85a:f43f:5307%30
    IPv4 Address. . . . . : 192.168.0.170
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.10

Ethernet adapter Ethernet 2:

    Connection-specific DNS Suffix . . . : 
    Link-local IPv6 Address . . . . . : fe80::c941:2db6:8539:57a8%11
    IPv4 Address. . . . . : 192.168.56.1
    Subnet Mask . . . . . : 255.255.255.0
```

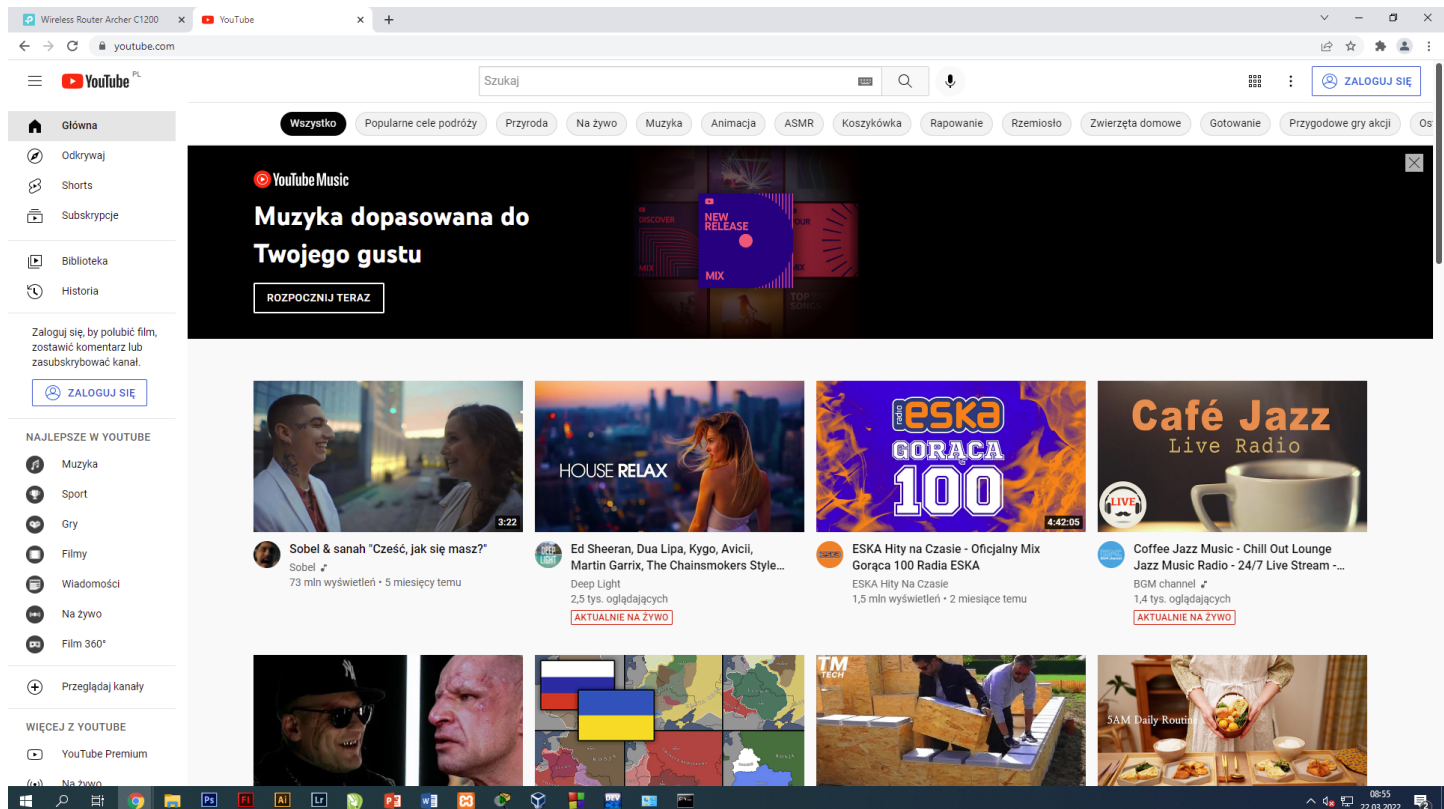

Połączenie ST -> S , ST -> Router, Ipconfig, działanie Youtube

```
WybierzWiersz polecenia

Pinging 192.168.0.10 with 32 bytes of data:
Reply from 192.168.0.10: bytes=32 time<1ms TTL=64
Reply from 192.168.0.10: bytes=32 time<1ms TTL=64
Reply from 192.168.0.10: bytes=32 time<1ms TTL=64
Reply from 192.168.0.10: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\user>ping 192.168.0.20

Pinging 192.168.0.20 with 32 bytes of data:
Reply from 192.168.0.20: bytes=32 time<1ms TTL=64
Reply from 192.168.0.20: bytes=32 time<1ms TTL=64
Reply from 192.168.0.20: bytes=32 time<1ms TTL=64
Reply from 192.168.0.20: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Users\user>ping 192.168.0.30

Pinging 192.168.0.30 with 32 bytes of data:
Reply from 192.168.0.30: bytes=32 time<1ms TTL=64
Reply from 192.168.0.30: bytes=32 time<1ms TTL=64
Reply from 192.168.0.30: bytes=32 time<1ms TTL=64
Reply from 192.168.0.30: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.0.30:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 0ms, Average = 0ms

C:\Users\user>ping 192.168.0.40

Pinging 192.168.0.40 with 32 bytes of data:
Reply from 192.168.0.40: bytes=32 time<1ms TTL=128
Reply from 192.168.0.40: bytes=32 time<1ms TTL=128
Reply from 192.168.0.40: bytes=32 time<1ms TTL=128
Reply from 192.168.0.40: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.40:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\user>ipconfig


Windows IP Configuration

Ethernet adapter LAN1:

    Connection-specific DNS Suffix . : 
    Link-local IPv6 Address . . . . . : fe80::887b:67d7:a951:290c%19
    IPv4 Address. . . . . : 192.168.0.50
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.10

Ethernet adapter LAN2:

    Connection-specific DNS Suffix . : 
    Link-local IPv6 Address . . . . . : fe80::5972:854d:a279:b148%18
    IPv4 Address. . . . . : 192.168.0.120
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.1
```

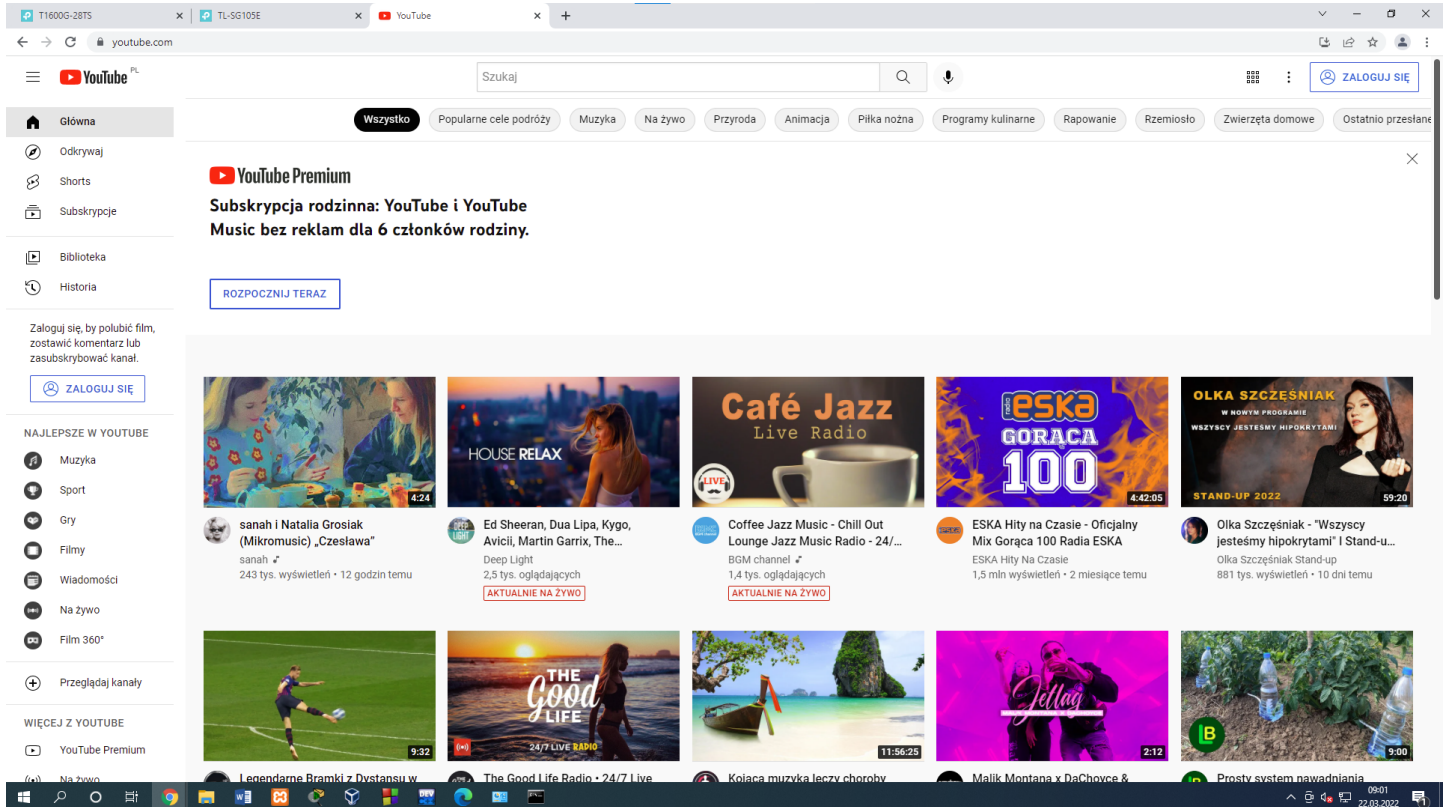

VLAN BEZ PVID

ST

```
Wienz polecenia
C:\Users\User>ping 192.168.0.10

Pinging 192.168.0.10 with 32 bytes of data:
Reply from 192.168.0.10: bytes=32 time<1ms TTL=64
Reply from 192.168.0.10: bytes=32 time<1ms TTL=64
Reply from 192.168.0.10: bytes=32 time<1ms TTL=64
Reply from 192.168.0.10: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\User>ping 192.168.0.20

Pinging 192.168.0.20 with 32 bytes of data:
Reply from 192.168.0.20: bytes=32 time<1ms TTL=64
Reply from 192.168.0.20: bytes=32 time<1ms TTL=64
Reply from 192.168.0.20: bytes=32 time<1ms TTL=64
Reply from 192.168.0.20: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Users\User>ping 192.168.0.30

Pinging 192.168.0.30 with 32 bytes of data:
Reply from 192.168.0.30: bytes=32 time<1ms TTL=64
Reply from 192.168.0.30: bytes=32 time<1ms TTL=64
Reply from 192.168.0.30: bytes=32 time<1ms TTL=64
Reply from 192.168.0.30: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.0.30:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 6ms, Average = 3ms

C:\Users\User>ping 192.168.0.50

Pinging 192.168.0.50 with 32 bytes of data:
Reply from 192.168.0.50: bytes=32 time<1ms TTL=128
Reply from 192.168.0.50: bytes=32 time<1ms TTL=128
Reply from 192.168.0.50: bytes=32 time<1ms TTL=128
Reply from 192.168.0.50: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.50:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\User>ipconfig

Windows IP Configuration

Ethernet adapter LAN1:

    Connection-specific DNS Suffix . : 
    Link-local IPv6 Address . . . . . : fe80::d18d:b85a:f43f:5307%30
    IPv4 Address. . . . . : 192.168.0.170
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.10

Ethernet adapter LAN2:

    Connection-specific DNS Suffix . : 
    Link-local IPv6 Address . . . . . : fe80::5971:854d:a279:b148%10
    IPv4 Address. . . . . : 192.168.0.120
    Subnet Mask . . . . . : 255.255.255.0
```

S

```
Wienz polecenia
C:\Users\User>ping 192.168.0.10

Pinging 192.168.0.10 with 32 bytes of data:
Reply from 192.168.0.10: bytes=32 time<1ms TTL=64
Reply from 192.168.0.10: bytes=32 time<1ms TTL=64
Reply from 192.168.0.10: bytes=32 time<1ms TTL=64
Reply from 192.168.0.10: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\User>ping 192.168.0.20

Pinging 192.168.0.20 with 32 bytes of data:
Reply from 192.168.0.20: bytes=32 time<1ms TTL=64
Reply from 192.168.0.20: bytes=32 time<1ms TTL=64
Reply from 192.168.0.20: bytes=32 time<1ms TTL=64
Reply from 192.168.0.20: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Users\User>ping 192.168.0.30

Pinging 192.168.0.30 with 32 bytes of data:
Reply from 192.168.0.30: bytes=32 time<1ms TTL=64
Reply from 192.168.0.30: bytes=32 time<1ms TTL=64
Reply from 192.168.0.30: bytes=32 time<1ms TTL=64
Reply from 192.168.0.30: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.0.30:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Users\User>ping 192.168.0.40

Pinging 192.168.0.40 with 32 bytes of data:
Reply from 192.168.0.40: bytes=32 time<1ms TTL=128
Reply from 192.168.0.40: bytes=32 time<1ms TTL=128
Reply from 192.168.0.40: bytes=32 time<1ms TTL=128
Reply from 192.168.0.40: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.40:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\User>ipconfig

Windows IP Configuration


Ethernet adapter LAN1:

    Connection-specific DNS Suffix . : 
    Link-local IPv6 Address . . . . . : fe80::d18d:b85a:f43f:5307%30
    IPv4 Address. . . . . : 192.168.0.170
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.10

Ethernet adapter Ethernet 2:

    Connection-specific DNS Suffix . : 
    Link-local IPv6 Address . . . . . : fe80::c994:12b6:8539:57a8%11
    IPv4 Address. . . . . : 192.168.56.1
    Subnet Mask . . . . . : 255.255.255.0
```


KONFIGURACJA VLANów

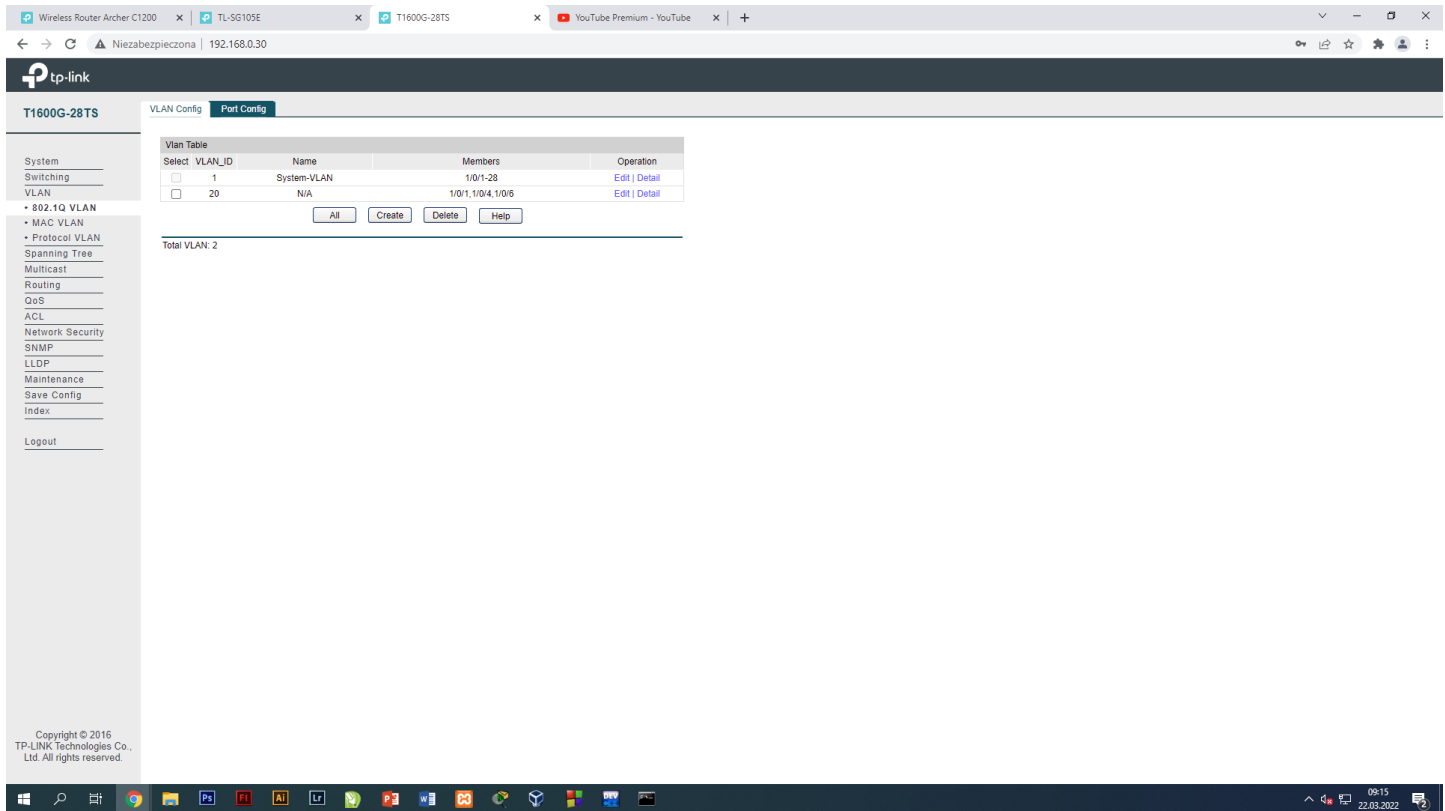

The screenshot shows the TP-Link web interface for a T1600G-28TS switch. The left sidebar contains a navigation menu with options like System, Switching, VLAN, 802.1Q VLAN, MAC VLAN, Protocol VLAN, Spanning Tree, Multicast, Routing, QoS, ACL, Network Security, SNMP, LLDP, Maintenance, Save Config, Index, and Logout. The main content area is titled 'VLAN Config' and 'Port Config'. It features a 'Vlan Table' with columns for Select, VLAN_ID, Name, Members, and Operation. The table lists two VLANs: VLAN 1 (System-VLAN) and VLAN 20 (N/A). Below the table are buttons for 'All', 'Create', 'Delete', and 'Help'. A 'Total VLAN: 2' summary is shown at the bottom of the table. The browser's address bar shows the URL '192.168.0.30'. The Windows taskbar at the bottom displays various application icons and the system clock showing 09:15 on 22.03.2022.

Select	VLAN_ID	Name	Members	Operation
☐	1	System-VLAN	1/0/1-28	Edit Detail
☐	20	N/A	1/0/1, 1/0/4, 1/0/6	Edit Detail

Total VLAN: 2

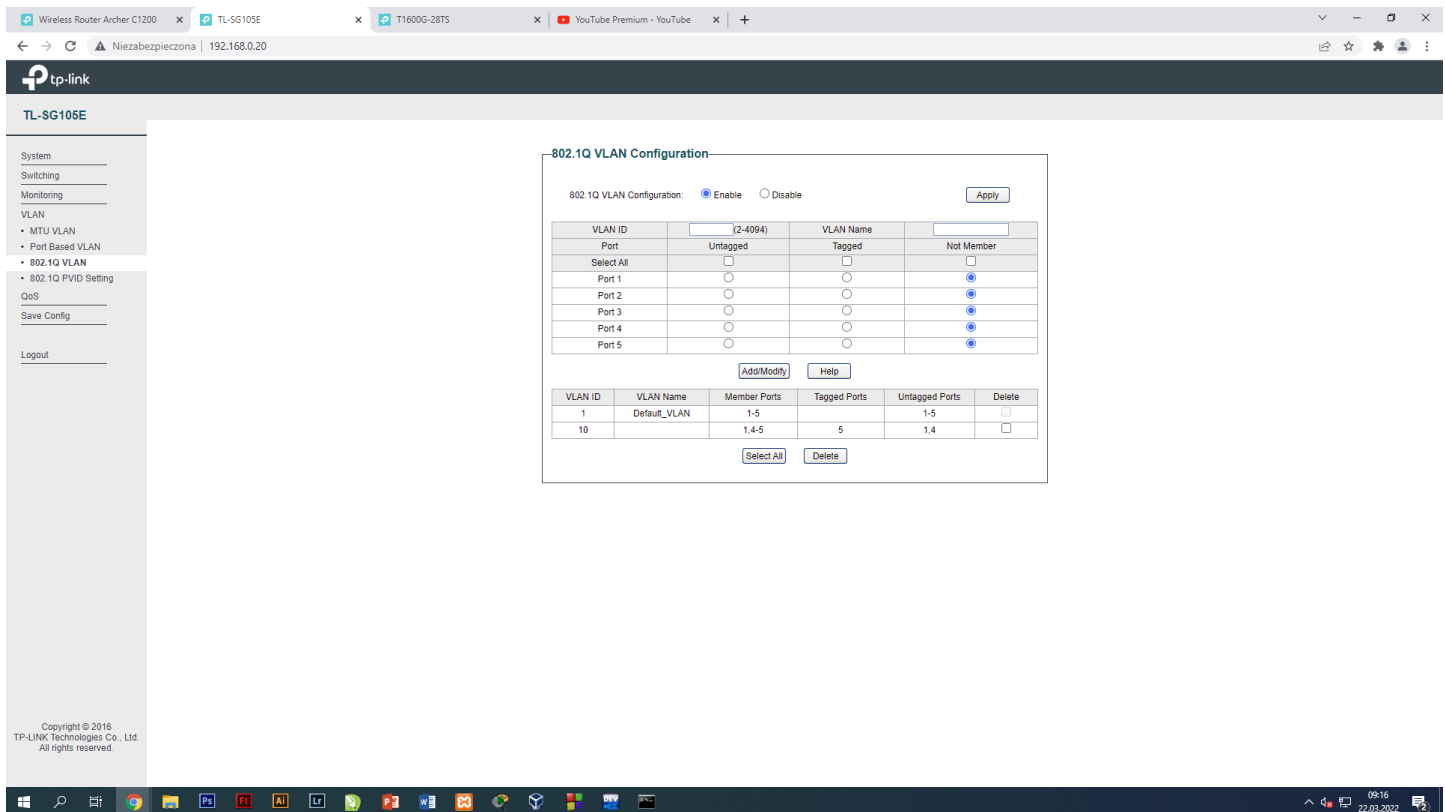

The screenshot shows the TP-Link web interface for a TL-SG105E switch, specifically the '802.1Q VLAN Configuration' page. The left sidebar is similar to the previous screenshot but includes 'Monitoring' and 'MTU VLAN' options. The main content area is titled '802.1Q VLAN Configuration' and includes a toggle for '802.1Q VLAN Configuration' (currently set to 'Enable'). Below this is a table for configuring VLANs. The table has columns for VLAN ID, Port, Untagged, Tagged, and Not Member. It lists VLAN 1 (Default_VLAN) and VLAN 10. Below the table are buttons for 'Add/Modify', 'Help', 'Select All', and 'Delete'. The browser's address bar shows the URL '192.168.0.20'. The Windows taskbar at the bottom displays various application icons and the system clock showing 09:16 on 22.03.2022.

VLAN ID	VLAN Name	Member Ports	Tagged Ports	Untagged Ports	Delete
1	Default_VLAN	1-5	5	1-5	☐
10		1,4-5	5	1,4	☐

VLAN z PVID

ST

```
Wiersz polecenia

C:\Users\User>ping 192.168.0.10

Pinging 192.168.0.10 with 32 bytes of data:
Reply from 192.168.0.10: bytes=32 time=1ms TTL=64
Reply from 192.168.0.10: bytes=32 time=1ms TTL=64
Reply from 192.168.0.10: bytes=32 time=1ms TTL=64
Reply from 192.168.0.10: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\User>ping 192.168.0.20

Pinging 192.168.0.20 with 32 bytes of data:
Reply from 192.168.0.20: bytes=32 time=1ms TTL=64
Reply from 192.168.0.20: bytes=32 time=2ms TTL=64
Reply from 192.168.0.20: bytes=32 time=2ms TTL=64
Reply from 192.168.0.20: bytes=32 time=2ms TTL=64

Ping statistics for 192.168.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Users\User>ping 192.168.0.30

Pinging 192.168.0.30 with 32 bytes of data:
Reply from 192.168.0.120: Destination host unreachable.
Reply from 192.168.0.120: Destination host unreachable.
Reply from 192.168.0.120: Destination host unreachable.
Reply from 192.168.0.120: Destination host unreachable.

Ping statistics for 192.168.0.30:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\User>ping 192.168.0.50

Pinging 192.168.0.50 with 32 bytes of data:
Reply from 192.168.0.50: bytes=32 time=1ms TTL=120
Reply from 192.168.0.50: bytes=32 time=1ms TTL=120
Reply from 192.168.0.50: bytes=32 time=1ms TTL=120
Reply from 192.168.0.50: bytes=32 time=1ms TTL=120

Ping statistics for 192.168.0.50:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\User>ipconfig

Windows IP Configuration

Ethernet adapter LAN1:

    Connection-specific DNS Suffix . : 
    Link-local IPv6 Address . . . . . : fe80::887b:67d7:a951:290c%19
    IPv4 Address. . . . . : 192.168.0.50
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.10

Ethernet adapter LAN2:

    Connection-specific DNS Suffix . : 
    Link-local IPv6 Address . . . . . : fe80::5972:854d:a279:b148%18
    IPv4 Address. . . . . : 192.168.0.120
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.10
```

S

```
Wiersz polecenia

C:\Users\User>ping 192.168.0.10

Pinging 192.168.0.10 with 32 bytes of data:
Reply from 192.168.0.10: bytes=32 time=1ms TTL=64
Reply from 192.168.0.10: bytes=32 time=1ms TTL=64
Reply from 192.168.0.10: bytes=32 time=1ms TTL=64
Reply from 192.168.0.10: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\User>ping 192.168.0.20

Pinging 192.168.0.20 with 32 bytes of data:
Reply from 192.168.0.20: bytes=32 time=1ms TTL=64
Reply from 192.168.0.20: bytes=32 time=1ms TTL=64
Reply from 192.168.0.20: bytes=32 time=1ms TTL=64
Reply from 192.168.0.20: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Users\User>ping 192.168.0.30

Pinging 192.168.0.30 with 32 bytes of data:
Reply from 192.168.0.170: Destination host unreachable.
Reply from 192.168.0.170: Destination host unreachable.
Reply from 192.168.0.170: Destination host unreachable.
Reply from 192.168.0.170: Destination host unreachable.

Ping statistics for 192.168.0.30:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\User>ping 192.168.0.40

Pinging 192.168.0.40 with 32 bytes of data:
Reply from 192.168.0.40: bytes=32 time=1ms TTL=120
Reply from 192.168.0.40: bytes=32 time=1ms TTL=120
Reply from 192.168.0.40: bytes=32 time=1ms TTL=120
Reply from 192.168.0.40: bytes=32 time=1ms TTL=120

Ping statistics for 192.168.0.40:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Users\User>ipconfig

Windows IP Configuration

Ethernet adapter LAN1:

    Connection-specific DNS Suffix . : 
    Link-local IPv6 Address . . . . . : fe80::d8e2:386a:1a8e:2546%13
    IPv4 Address. . . . . : 192.168.0.40
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.10

Ethernet adapter Ethernet 2:

    Connection-specific DNS Suffix . : 
    Link-local IPv6 Address . . . . . : fe80::c904:2d06:8539:57a8%11
    IPv4 Address. . . . . : 192.168.0.1
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 

Ethernet adapter WAN:

    Connection-specific DNS Suffix . : 
    Link-local IPv6 Address . . . . . : fe80::d18d:b85a:f43f:5307%30
    IPv4 Address. . . . . : 192.168.0.170
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.0.10
```

Wireless Router Archer C1200 x TL-SG105E x T1600G-28TS x https://www.google.com/search/ x +

Niezabezpieczona | 192.168.0.30

tp-link

T1600G-28TS VLAN Config Port Config

System
Switching
VLAN
• 802.1Q VLAN
• MAC VLAN
• Protocol VLAN
Spanning Tree
Multicast
Routing
QoS
ACL
Network Security
SNMP
LLDP
Maintenance
Save Config
Index
Logout

VLAN Port Config

UNIT: 1 LAGS

Select	Port	PVID	LAG	VLAN
☐	1/0/1	20	---	Detail
☐	1/0/2	1	---	Detail
☐	1/0/3	1	---	Detail
☐	1/0/4	20	---	Detail
☐	1/0/5	1	---	Detail
☐	1/0/6	1	---	Detail
☐	1/0/7	1	---	Detail
☐	1/0/8	1	---	Detail
☐	1/0/9	1	---	Detail
☐	1/0/10	1	---	Detail
☐	1/0/11	1	---	Detail
☐	1/0/12	1	---	Detail
☐	1/0/13	1	---	Detail
☐	1/0/14	1	---	Detail
☐	1/0/15	1	---	Detail

All Apply Help

Copyright © 2016
TP-LINK Technologies Co., Ltd. All rights reserved.

Wireless Router Archer C1200 x TL-SG105E x T1600G-28TS x https://www.google.com/search/ x +

Niezabezpieczona | 192.168.0.20

tp-link

TL-SG105E

System
Switching
Monitoring
VLAN
• MTU VLAN
• Port Based VLAN
• 802.1Q VLAN
• 802.1Q PVID Setting
QoS
Save Config
Logout

802.1Q VLAN PVID Setting

Select	Port	PVID
☐	Port 1	10
☐	Port 2	1
☐	Port 3	1
☐	Port 4	10
☐	Port 5	1

Apply Help

Note:
1. By default, the PVID of all ports is 1.
2. 802.1Q VLAN PVID will be restored to 1 when 802.1Q VLAN is disabled.

Copyright © 2016
TP-LINK Technologies Co., Ltd. All rights reserved.

Jak chcemy mieć dostęp do internetu, to należy usunąć PVID 20 z 6 portu (1600)

REZERWACJA ADRESÓW DHCP

The screenshot shows the TP-Link Archer C1200 web interface. The left sidebar contains navigation options: Stan, Sieć (selected), Internet, LAN, IPTV, Serwer DHCP, Dynamiczny DNS, Routing zaawansowany, Sieć bezprzewodowa, Sieć dla gości, Przekierowanie portów, Ustawienia USB, Kontrola rodzicielska, QoS, Zabezpieczenia, and IPv6. The main content area is titled 'Ustawienia' and includes a 'Szybka konfiguracja' tab. Under 'Ustawienia', the 'Serwer DHCP' section is active, showing 'Włącz serwer DHCP' checked. The 'Pula adresów IP' is set to 192.168.0.100 - 192.168.0.190, and the 'Czas przydzielenia adresu' is 120 minut. Below this, the 'Rezerwacja adresów' section shows a table with two reserved addresses:

ID	Adres MAC	Zarezerwowany adres IP	Opis	Stan	Zmień
1	C4-6E-1F-04-9A-62	192.168.0.170	---	Lightbulb icon	Edit/Delete icons
2	00-E0-4C-68-37-94	192.168.0.150	---	Lightbulb icon	Edit/Delete icons

Below the reservation table is the 'Lista klientów DHCP' section, showing 5 clients. The first client is listed with ID 1, Name --, MAC 00-E0-4C-68-37-94, Assigned IP 192.168.0.120, and Lease time 1:52:3.

S

```
Ethernet adapter WAN:

Connection-specific DNS Suffix  . : 
Link-local IPv6 Address . . . . . : fe80::d18d:b85a:f43f:5307%30
IPv4 Address. . . . . : 192.168.0.170
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.0.10
```


ST

```
Ethernet adapter LAN2:


Connection-specific DNS Suffix  . : 
Link-local IPv6 Address . . . . . : fe80::5972:854d:a279:b148%18
IPv4 Address. . . . . : 192.168.0.150
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.0.10
```

POŁĄCZENIE BEZPRZEWODOWE

USTAWIENIA SIECI BEZPRZEWODOWEJ

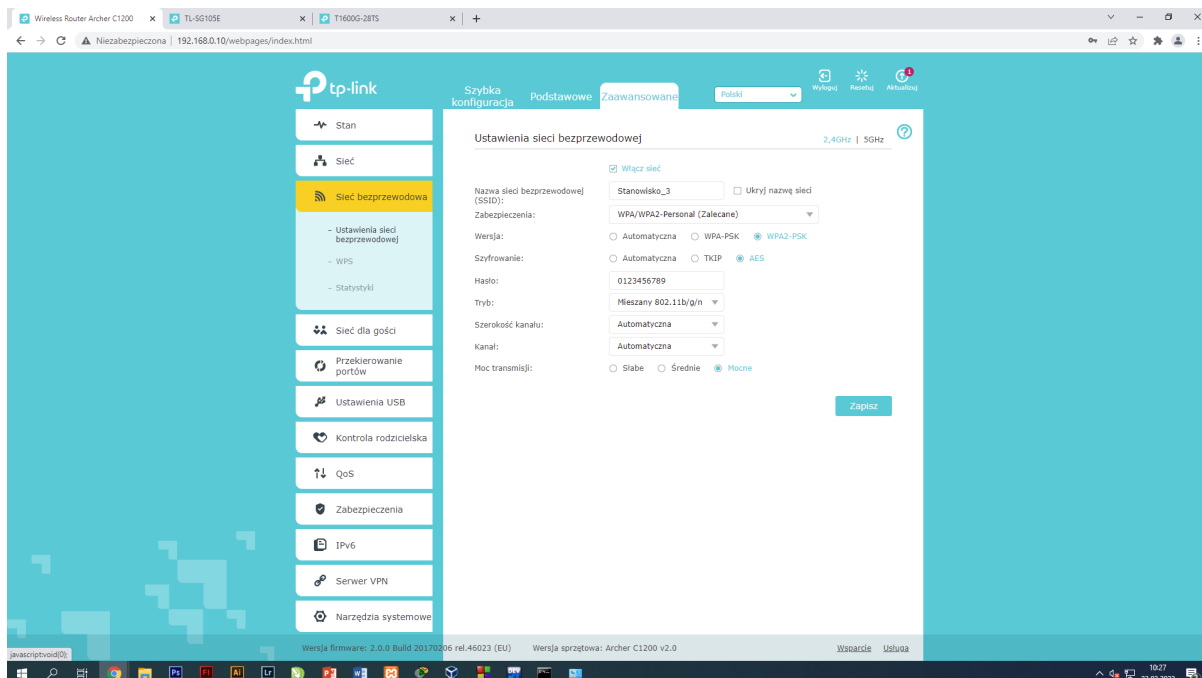


POŁĄCZENIE NA ST Z SIECIĄ BEZPRZEWODOWĄ

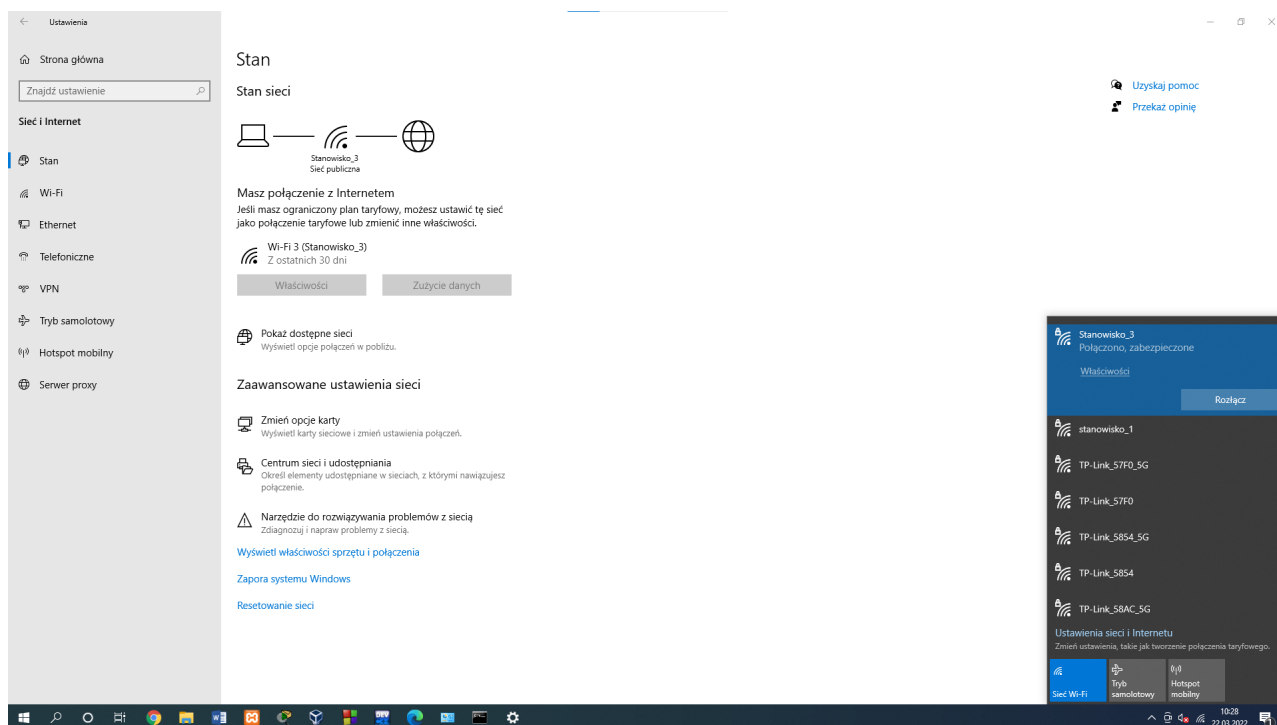

PORÓWNANIE SZYBKOŚCI TRANSMISJI

WI-FI

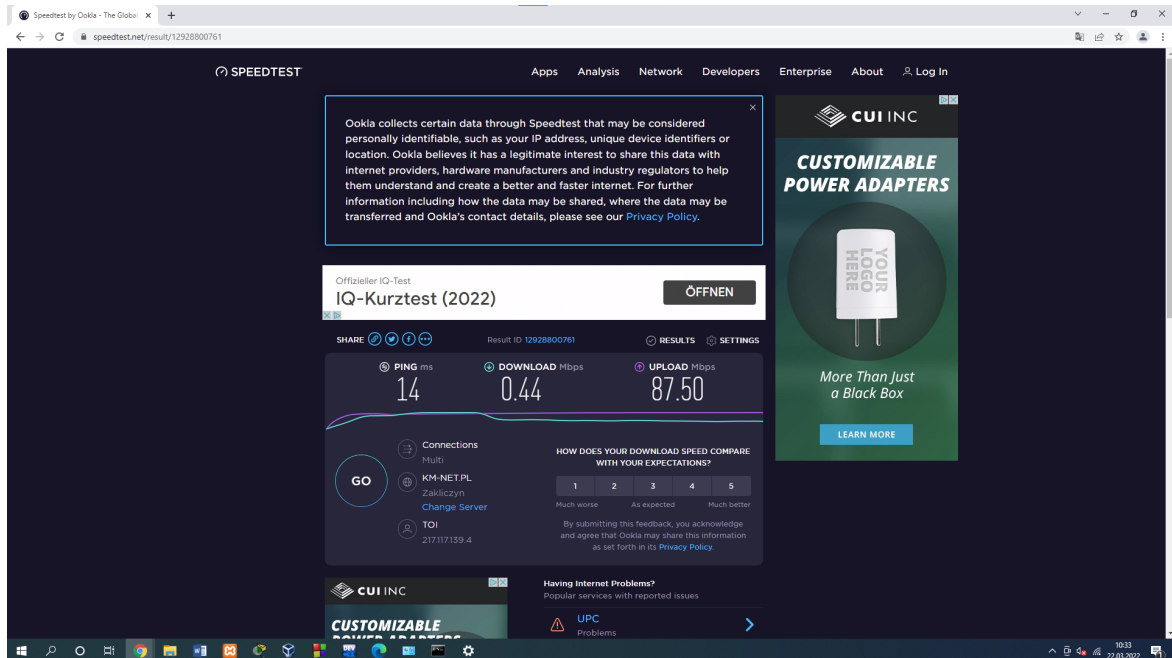

ETHERNET

