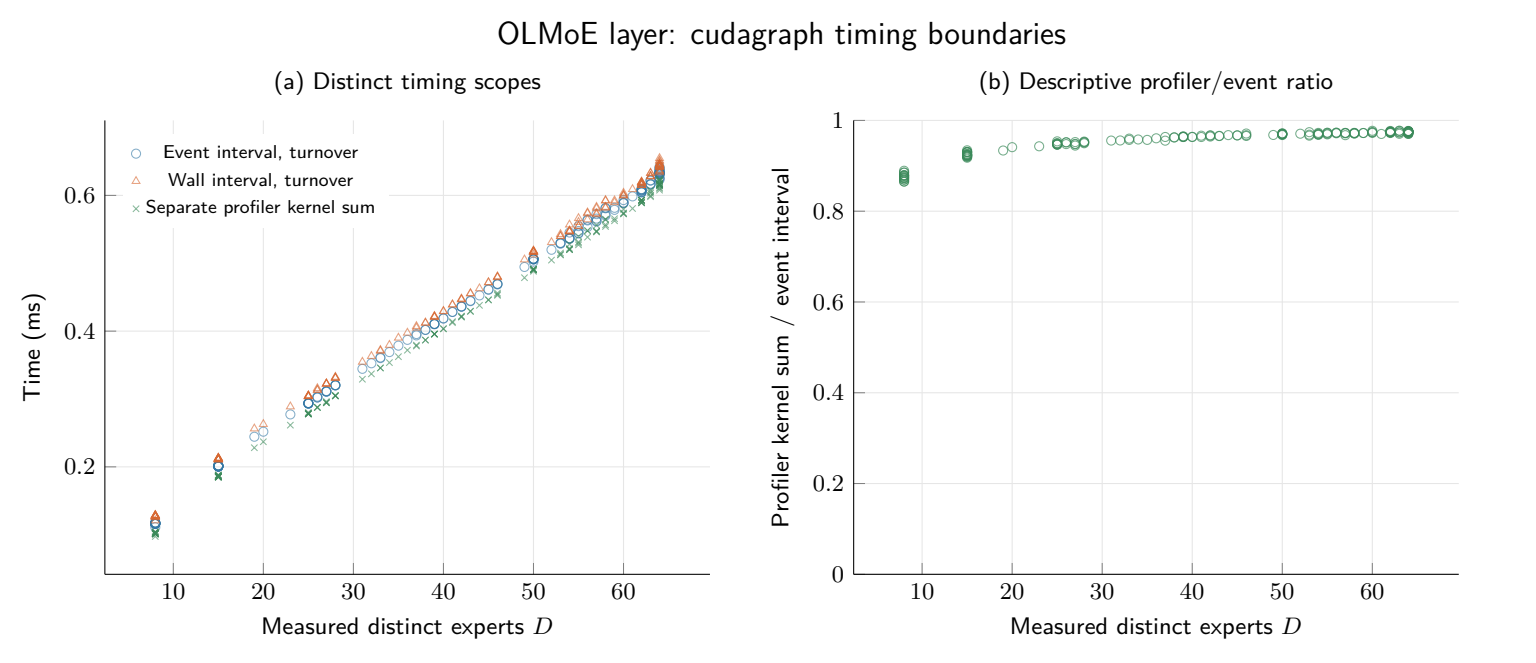


Profile cache handling is recorded separately in the diagnostics. Event/wall use per-call turnover of a 256 MiB unrelated buffer outside timers. Separate calls and cache states prevent interpreting timing differences as additive CPU launch overhead or HBM traffic.