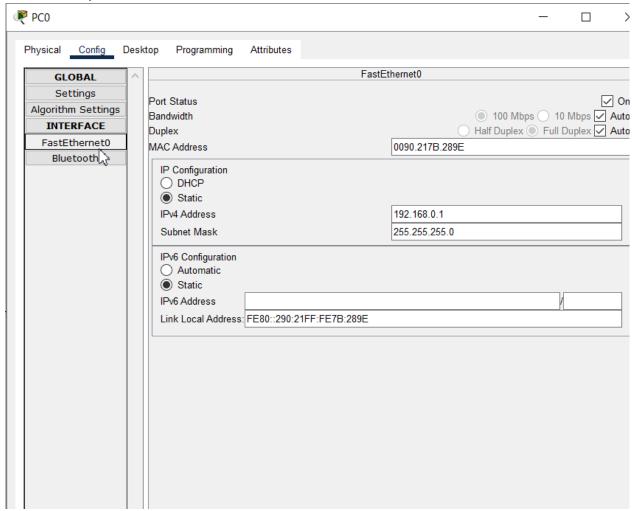Лабораторная работа №16
Молчанов Сергей

Switch0

Physical   Config   CLI   Attributes

IOS Command Line Interface

```
Hardware Board Revision Number  : 0x01


Switch  Ports  Model             SW Version          SW Image
------  -----  -----             ----------          ----------
*   1   26     WS-C2960-24TT     12.2                C2960-LANBASE-M

Cisco IOS Software, C2960 Software (C2960-LANBASE-M), Version 12.2(25)FX, RELEASE SOFTWARE (fc1)
Copyright (c) 1986-2005 by Cisco Systems, Inc.
Compiled Wed 12-Oct-05 22:05 by pt_team

Press RETURN to get started!


%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up


Switch>en
Switch#no sh
         ^
% Invalid input detected at '^' marker.

Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#hostname 1sw
1sw(config)#int vlan 1
1sw(config-if)#no sh

1sw(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up

1sw(config-if)#ip address 192.168.0.2 255.255.255.0
1sw(config-if)#exit
1sw(config)#
```

Copy   Paste

Physical Config CLI Attributes

IOS Command Line Interface

```
Hardware Board Revision Number  : 0x01


Switch   Ports  Model            SW Version           SW Image
------   -----  -----            ----------           ----------
*   1    26     WS-C2960-24TT     12.2                 C2960-LANBASE-M

Cisco IOS Software, C2960 Software (C2960-LANBASE-M), Version 12.2(25)FX, RELEASE SOFTWARE (fc1)
Copyright (c) 1986-2005 by Cisco Systems, Inc.
Compiled Wed 12-Oct-05 22:05 by pt_team

Press RETURN to get started!


%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up


Switch>en
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#hostname lsw
lsw(config)#int vlan 1
lsw(config-if)#no sh

lsw(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up

lsw(config-if)#ip address 192.168.0.3 255,255.255.0
                                       ^
% Invalid input detected at '^' marker.

lsw(config-if)#ip address 192.168.0.3 255..255.255.0
                                          ^
% Invalid input detected at '^' marker.

lsw(config-if)#ip address 192.168.0.3 255.255.255.0
lsw(config-if)#exit
lsw(config)#
```

Copy   Paste

Physical   Config   Desktop   Programming   Attributes

Command Prompt   X

```
Cisco Packet Tracer PC Command Line 1.0
C:\>telnet 192.168.0.3
Trying 192.168.0.3 ...Open


User Access Verification

Password:
Password:
Password:

[Connection to 192.168.0.3 closed by foreign host]
C:\>telnet 192.168.0.3
Trying 192.168.0.3 ...Open


User Access Verification

Password:
Password:
Password:
lsw>en
Password:
lsw#
```