


Молчанов Сергей

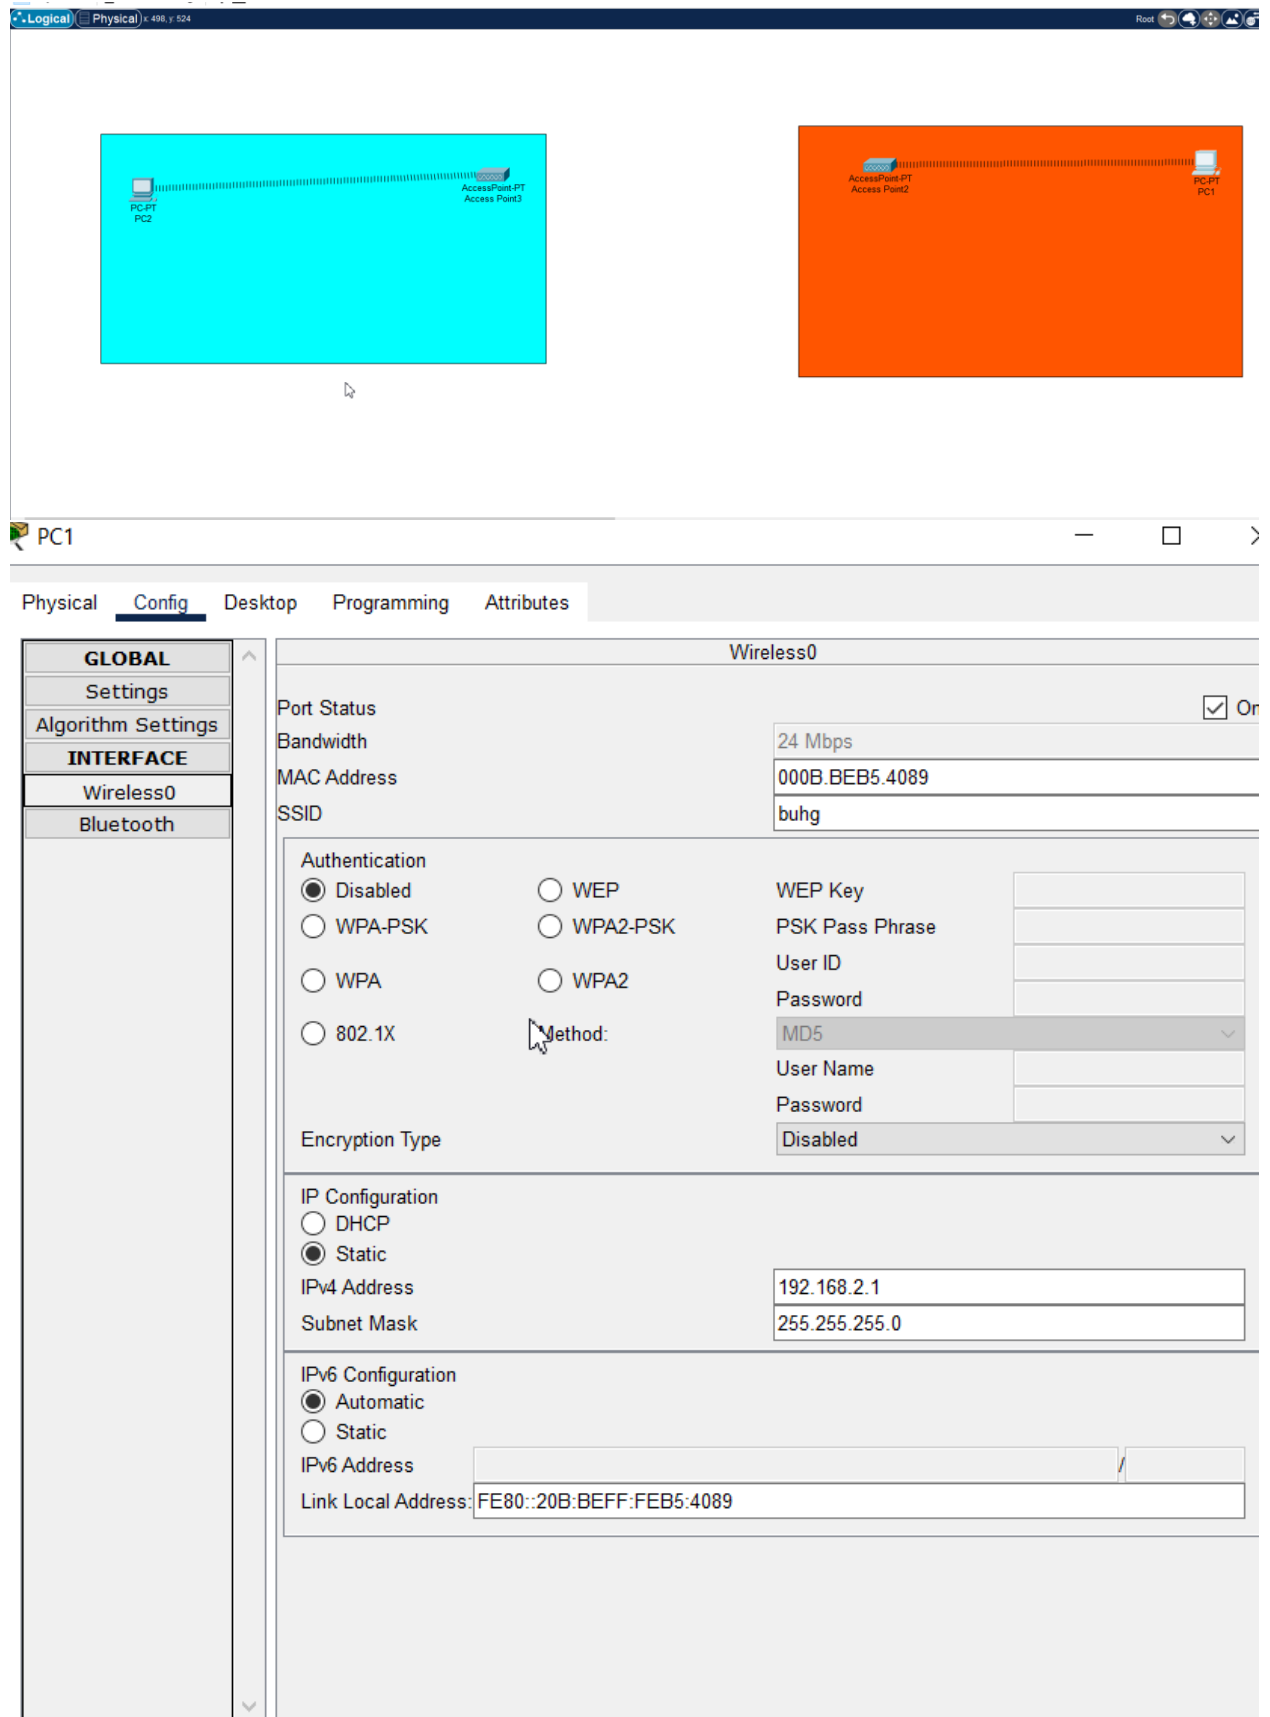

```
Physical  Config  Desktop  Programming  Attributes
Command Prompt X

Cisco Packet Tracer PC Command Line 1.0
C:\>

C:\>ping 192.168.2.1

Pinging 192.168.2.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.2.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),


C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time=7ms TTL=128
Reply from 192.168.1.1: bytes=32 time=3ms TTL=128
Reply from 192.168.1.1: bytes=32 time=3ms TTL=128
Reply from 192.168.1.1: bytes=32 time=4ms TTL=128

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 3ms, Maximum = 7ms, Average = 4ms

C:\>
```

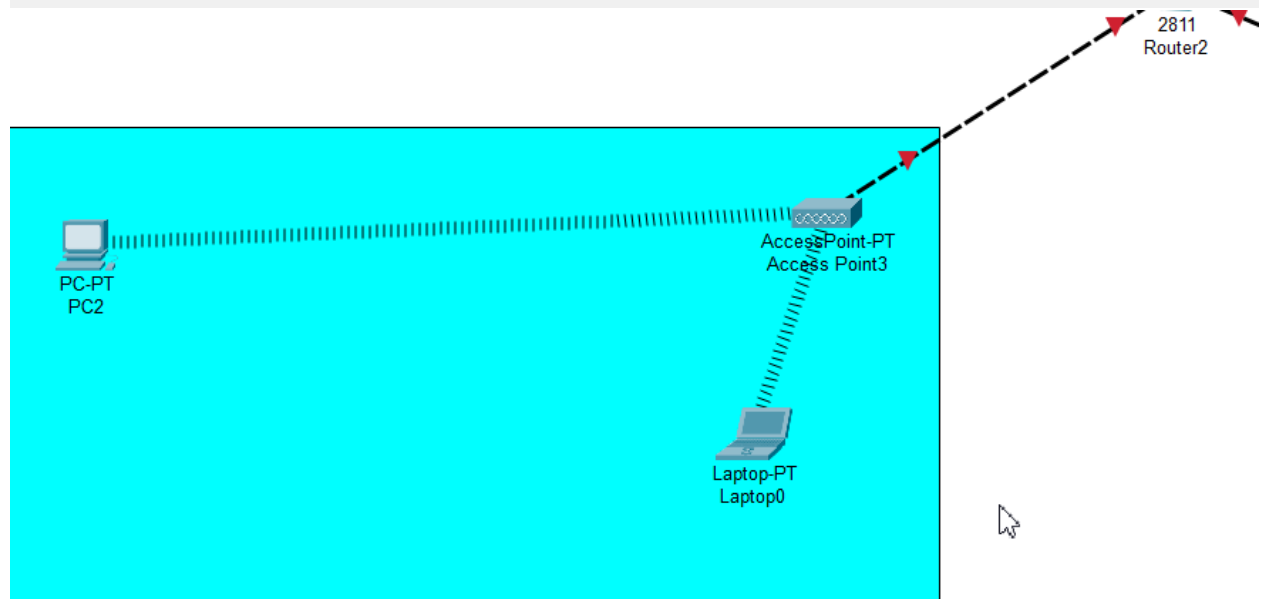

Physical **Config** Attributes

Port 1	
Port Status	<input checked="" type="checkbox"/> On
SSID	Default
2.4 GHz Channel	6
Coverage Range (meters)	140,00
Authentication	
<input type="radio"/> Disabled	<input checked="" type="radio"/> WEP
<input type="radio"/> WPA-PSK	<input type="radio"/> WPA2-PSK
WEP Key	1234567890
PSK Pass Phrase	
User ID	
Password	
Encryption Type	40/64-Bits (10 Hex digits)

- GLOBAL
- Settings
- Algorithm Settings
- INTERFACE
- Wireless0
- Bluetooth

Wireless0

Port Status	<input checked="" type="checkbox"/> On
Bandwidth	24 Mbps
MAC Address	000B.BEB5.4089
SSID	buhg
Authentication <input type="radio"/> Disabled <input checked="" type="radio"/> WEP <input type="radio"/> WPA2-PSK <input type="radio"/> WPA-PSK <input type="radio"/> WPA2 <input type="radio"/> WPA <input type="radio"/> 802.1X <input type="radio"/> Method:	
WEP Key	1234567890
PSK Pass Phrase	
User ID	
Password	
Method	MD5
User Name	
Password	
Encryption Type	40/64-Bits (10 Hex digits)
IP Configuration <input type="radio"/> DHCP <input checked="" type="radio"/> Static	
IPv4 Address	192.168.2.1
Subnet Mask	255.255.255.0
IPv6 Configuration <input checked="" type="radio"/> Automatic <input type="radio"/> Static	
IPv6 Address	
Link Local Address	FE80::20B:BEFF:FE85:4089