From 2D Segmentation to HipMRI 3D

COMP3710 progress evidence and Hard project feasibility review

The 2D stage is complete and provides a verified segmentation pipeline, trained checkpoint and held-out visual evidence. The next stage changes dataset and clinical target: HipMRI volumetric prostate segmentation using matched plain and improved 3D U-Nets.

Completed 2D result

Dataset	Training	Best validation DSC	Test foreground mean DSC
OASIS brain MRI slices	80 epochs on A100	0.9770 at epoch 29	0.9694

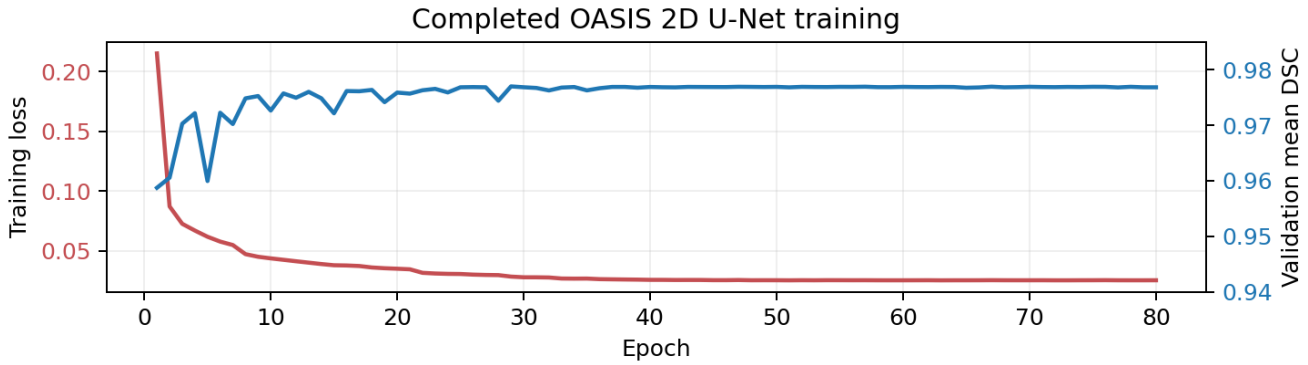


Figure 1. Training loss decreases while validation mean DSC stabilises near 0.977.

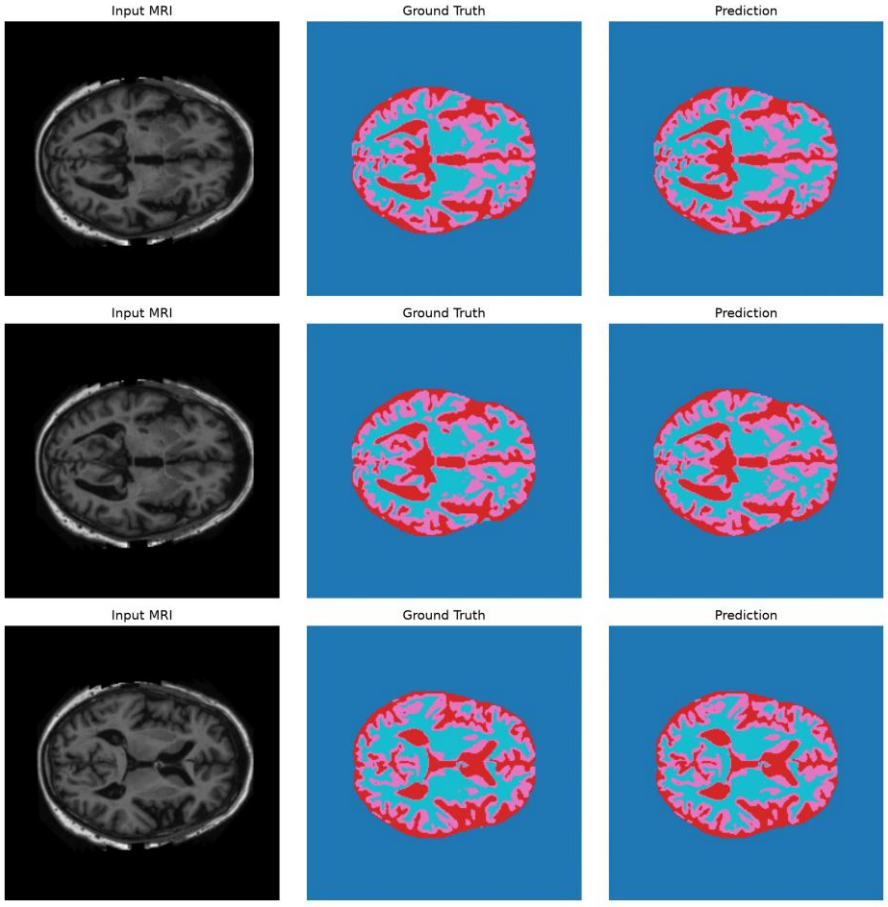


Figure 2. Held-out OASIS examples: input MRI, ground truth and 2D U-Net prediction.

Held-out per-class DSC: background 0.9993; foreground classes 1-3 0.9648, 0.9648 and 0.9786. All foreground classes exceed the earlier 2D target of 0.90. These are not HipMRI prostate results.

HipMRI 3D Stage

Current implementation evidence and next experiment

Why move from 2D to 3D

Independent 2D slices cannot directly enforce continuity across the prostate base, middle and apex. The 3D stage uses volumetric context and tests whether residual units plus deep supervision improve difficult boundaries enough to justify the additional memory and runtime.

Stage	Status	Evidence
2D OASIS U-Net	Complete	80-epoch history, checkpoint, held-out DSC and prediction panel retained.
3D data pipeline	Implemented	Recursive NIfTI pairing; shape, affine, finite-intensity and integer-label validation.
Patient split	Implemented	Seed-42 train/validation/test manifest with zero-overlap checks.
3D models	Implemented	BaselineUNet3D and residual ImprovedUNet3D with two deep-supervision heads.
Automated verification	8 tests pass	Pairing, invalid-data rejection, patient split, forward/backward, loss and evaluation logic.
Real HipMRI training	Next	Data audit, Rangpur GPU smoke run, then matched baseline and improved full runs.

Planned fair comparison

Audit HipMRI volumes	Freeze patient manifest	GPU smoke run	Train both 3D models	Held-out metrics and failure panels

Acceptance evidence for the 3D stage

Both models will use the same patient-disjoint manifest. Final evidence will report prostate Dice (target at least 0.70), per-class Dice/IoU, peak VRAM, per-case inference time and 3-5 held-out base/apex or boundary-leakage cases. Checkpoint selection uses validation data only.

Resource risk and fallback

A short smoke run will determine patch size, batch size and mixed precision before full Slurm jobs. If the improved model does not reduce real held-out errors at acceptable cost, the plain 3D U-Net remains the fallback.

Tutor confirmation requested

Please confirm the HipMRI label encoding, whether background is excluded from reported Dice, recommended patch and batch settings, compute budget, and required logs, checkpoints and failure panels.