
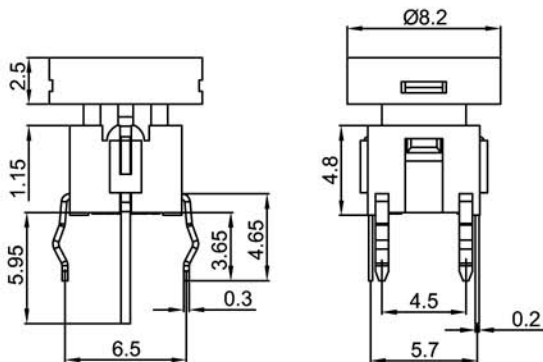
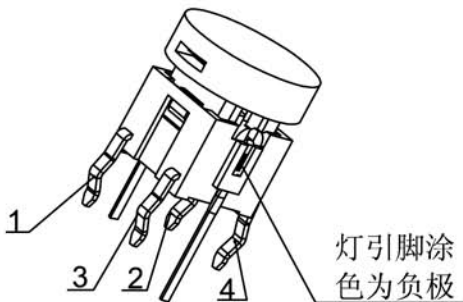



苏州工业园区思威电子有限公司
SWITECH ELECTRONICS CO., LTD

TS2




Specifications	
Circuit	:SPST
Current rating	:50mA
Voltage rating	:12VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:100m Ω Max. (Initial)
Insulation resistance	:100M Ω Min.
Operating force	:300 \pm 50gf
	:200 \pm 50gf
Total travel	:0.25mm \pm 0.1mm
Operating life	:100,000 cycles Min
Solder specifications	:260 $^{\circ}$ C for 5 seconds
Function	:Momentary
Operating temperature	:+10 $^{\circ}$ C ~ +60 $^{\circ}$ C

P.C.B. LAYOUT

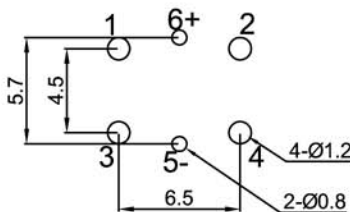

CIRCUIT



MATERIAL:

Base Frame: Nylon46, UL rated:94 V-2 Min. ;
Actuator: PBT, UL rated:94 V-2 Min. ;
Cap: PC ;
Terminal: Brass, Silver or Tin plated .

				公差 TOLERANCES		.X \pm 0.3 .XX \pm 0.15		角度 ANGLE \pm 1 $^{\circ}$		单位 DIMENSION UNIT	mm.
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2016.08.15	品名 TITLE	图号 DRAWING NO
A1	重新整理核对	2016.08.15	N/A	核准	李新超	核对	李伟奇	绘图	姜庆勇	TS2I-085C-E-C8	TS2I-085B/C-X-X
A0	New Issue	2016.08.15	N/A	版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY			