
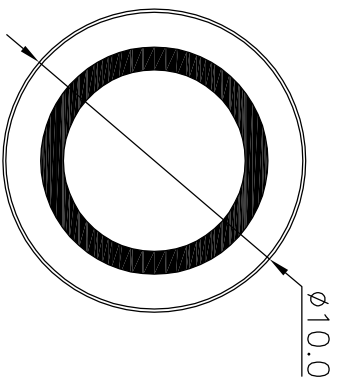


- NOTES:
1. RATING: 12VDC 50mA
 2. CONTACT RESISTANCE: 100mΩ Max
 3. INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
 4. DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MIN
 5. LIFE TEST: 100,000 CYCLES
 6. OPERATION FORCE: 250±80g
 7. TRAVEL: 0.25±0.1mm

LED COLOR					
1	2	3	4	5	6
Red	Yellow	Green	Blue	White	Pure Green

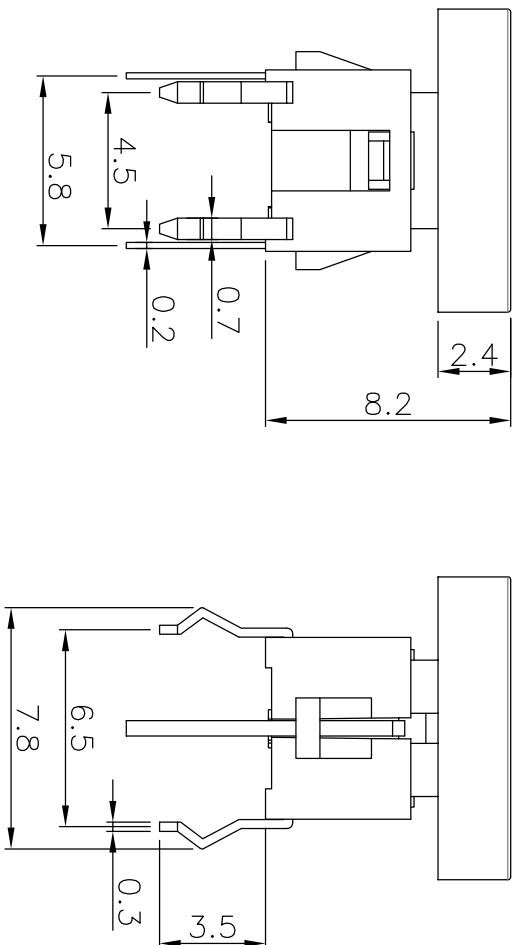

REV	DESCRIPTION	DRW	DATE
A/01		OUXH	2016.08.21

ITEM	PART NAME	MATERIAL
6	COVER	ABS
5	LED	GaAsP/GaP
4	TERMINAL	H65(C2680)
3	CONTACT	SUS
2	BUTTON	PA66/POM
1	HOUSING	PA66

飞硕电子有限公司 FLSHU ELECTRONICS CO.,LTD Tel: +86-769-82262477 Fax: +86-769-81512802			
TOLERANCE		DRAWN	
UNLESS OTHERWISE STATED		DATE	
X.X	±0.25	CHK'D	DATE
X.XX	±0.15	UNIT	mm
REV	A/01	SCALE	1:1
SIZE	A4	SHEET	1 OF 1
APP'VD		DATE	
TITLE		TACT SWITCH	
MODEL		PB03-1010L-16C-20圈(SUS250)	
MATERIAL		FINISH	