



AINZARA ALUMINUM & GLASS PROCESSING


Industrial Area, Tripoli, Libya | P.O. Box 82144 | Tel: +218 92 429 5050 | info@ainzara.ly

ARCHITECTURAL SYSTEMS DIVISION | OFFICIAL TECHNICAL SPECIFICATION SHEET

SLAT 64 - Monorail & Multi-Rail Sliding System

SERIES: ARTOS SERIES | SYSTEM CODE: SLAT64 | EXTRUSION: EN AW-6063 T6

ENGINEERING 2D CAD PROFILE SCHEMATIC

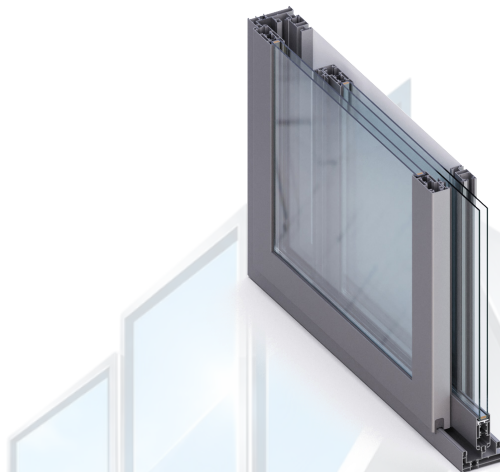

MECHANICAL & ARCHITECTURAL SPECIFICATION MATRIX

MANUFACTURING STANDARD

Base Aluminum Alloy	EN AW-6063 T6 (Extrusion to EN 12020-2)
Frame Architectural Depth	64 mm (2-Rail) / 112 mm (3-Rail)
Sash / Vent Profile Depth	38 mm Curved / Interlocking Sash
Glazing Thickness Capacity	18 mm - 28 mm Insulated Glazing
Thermal Barrier Insulation	Standard Non-Thermal / Interlock Brush Gaskets
Air Permeability (EN 12207)	Class 3 (EN 12207 / 450 Pa)
Water Tightness (EN 12208)	Class 7A (EN 12208 / 300 Pa)
Wind Load Resistance (EN 12210)	Class C3 (EN 12210 / 1200 Pa)
Acoustic Sound Reduction	Rw = 32 - 36 dB
Maximum Sash Weight Capacity	160 kg per Sash

FABRICATION STANDARDS & QUALITY COMPLIANCE

- Extrusion Tolerances: Conforms strictly to EN 12020-2 / DIN 17615 high precision architectural standard.
- Surface Coating: Qualicoat Certified Electrostatic Powder Coating (60-80 microns) / Qualanod Anodizing (15-20 microns).
- Gaskets: EPDM weatherseals according to DIN 7863. Hardware groove: Standard European groove compatibility.
- Quality Management: Extruded and assembled under certified ISO 9001:2015 industrial manufacturing systems.

FACTORY DIRECTIVE: Official technical specifications verified for tender submissions, fabrication, and structural installation.

ENGINEERING DESK: +218 92 429 5050 | +218 91 614 1616 | Tripoli Industrial Complex, Libya | www.ainzara.ly