




SA 65-2 - Wintergarden Heavy-Span Steel Reinforced Roof

SERIES: URAL SERIES | SYSTEM CODE: SA65-2 | EXTRUSION: EN AW-6063 T6

ENGINEERING 2D CAD PROFILE SCHEMATIC

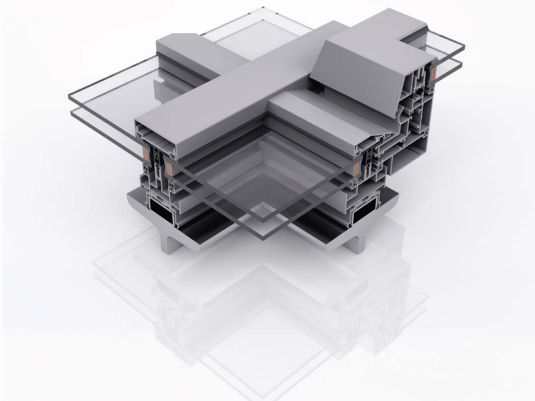

MECHANICAL & ARCHITECTURAL SPECIFICATION MATRIX

MANUFACTURING STANDARD

Base Aluminum Alloy	EN AW-6063 T6 with Internal Galvanized Steel
Frame Architectural Depth	65 mm Rafter with Internal Steel Tube (565-7101)
Sash / Vent Profile Depth	Reinforced Structural Glazing Rafter
Glazing Thickness Capacity	28 mm - 48 mm Triple Low-E Acoustic Glazing
Thermal Barrier Insulation	Continuous Polyamide + Drainage Gasket Matrix
Air Permeability (EN 12207)	Class AE 1200 (EN 12152 / 1200 Pa)
Water Tightness (EN 12208)	Class RE 1800 (EN 12154 / 1800 Pa)
Wind Load Resistance (EN 12210)	High Wind & Snow Load Capacity (3200 Pa)
Acoustic Sound Reduction	Rw = 40 - 45 dB
Maximum Sash Weight Capacity	550 kg Reinforced Span Capacity

FABRICATION STANDARDS & QUALITY COMPLIANCE

- Extrusion Tolerances: Conforms strictly to EN 12020-2 / DIN 17615 high precision architectural standard.
- Surface Coating: Qualicoat Certified Electrostatic Powder Coating (60-80 microns) / Qualanod Anodizing (15-20 microns).
- Gaskets: EPDM weatherseals according to DIN 7863. Hardware groove: Standard European groove compatibility.
- Quality Management: Extruded and assembled under certified ISO 9001:2015 industrial manufacturing systems.

FACTORY DIRECTIVE: Official technical specifications verified for tender submissions, fabrication, and structural installation.

ENGINEERING DESK: +218 92 429 5050 | +218 91 614 1616 | Tripoli Industrial Complex, Libya | www.ainzara.ly