


CWA 50 HV - Semi-Structural Concealed Vent Facade System

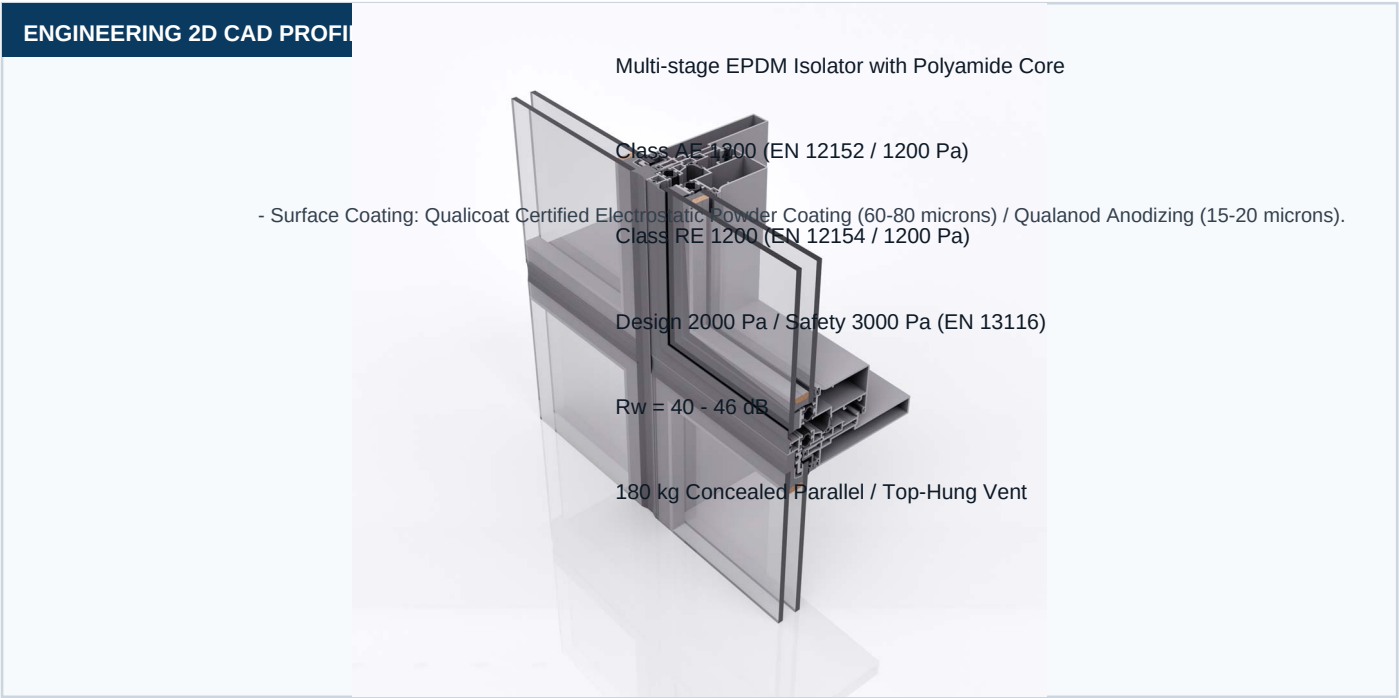

MECHANICAL & ARCHITECTURAL SPECIFICATION MATRIX	
Base Aluminum Alloy	80 mm - 220 mm Mullion & Transom Matrix
Frame Architectural Depth	50 mm Visible Glazing with Mullion Overlap Vents
Sash / Vent Profile Depth	24 mm - 44 mm Double / Triple Acoustic Glazing
Glazing Thickness Capacity	Multi-stage EPDM Isolator with Polyamide Core
Thermal Barrier Insulation	Class AE 1200 (EN 12152 / 1200 Pa)
Air Permeability (EN 12207)	- Surface Coating: Qualicoat Certified Electrostatic Powder Coating (60-80 microns) / Qualanod Anodizing (15-20 microns). Class RE 1200 (EN 12154 / 1200 Pa)
Water Tightness (EN 12208)	Design 2000 Pa / Safety 3000 Pa (EN 13116)
Wind Load Resistance (EN 12210)	Rw = 40 - 46 dB
Acoustic Sound Reduction	180 kg Concealed Parallel / Top-Hung Vent
Maximum Sash Weight Capacity	Standard European groove compatibility: EN AW-6063 T6 (Extrusion to EN 12020-2)

FABRICATION STANDARDS & QUALITY COMPLIANCE	