

SA 65-2 - Wintergarden Heavy Span Steel Reinforced Roof


28 mm - 48 mm Triple Low-E Acoustic Glazing

ENGINEERING 2D CAD PROFILE

Continuous Polyamide + Drainage Gasket Matrix

Class AE 1200 (EN 12152 / 1200 Pa)

- Surface Coating: Qualicoat Certified Electrostatic Powder Coating (60-80 microns) / Qualanod Anodizing (15-20 microns).
Class RE 1800 (EN 12154 / 1800 Pa)

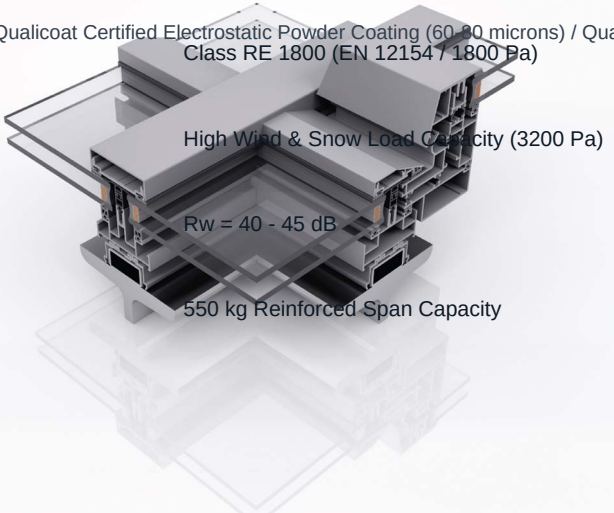

High Wind & Snow Load Capacity (3200 Pa)

Rw = 40 - 45 dB

550 kg Reinforced Span Capacity

MECHANICAL & ARCHITECTURAL SPECIFICATION MATRIX

Base Aluminum Alloy

Frame Architectural Depth

Sash / Vent Profile Depth

Glazing Thickness Capacity

Thermal Barrier Insulation

Air Permeability (EN 12207)

Water Tightness (EN 12208)

Wind Load Resistance (EN 12210)

Acoustic Sound Reduction

Maximum Sash Weight Capacity

FABRICATION STANDARDS & QUALITY COMPLIANCE