

SA 65 - Architectural Skylight & Atrium Roof System


24 mm - 44 mm Stepped Solar Control IGU

ENGINEERING 2D CAD PROFILE

Multi-Stage Internal EPDM Condensation Troughs

Class AE 1200 (EN 12152 / 1200 Pa)

- Surface Coating: Qualicoat Certified Electrostatic Powder Coating (60-80 microns) / Qualanod Anodizing (15-20 microns).
Class RE 1500 (EN 12154 / 1500 Pa)

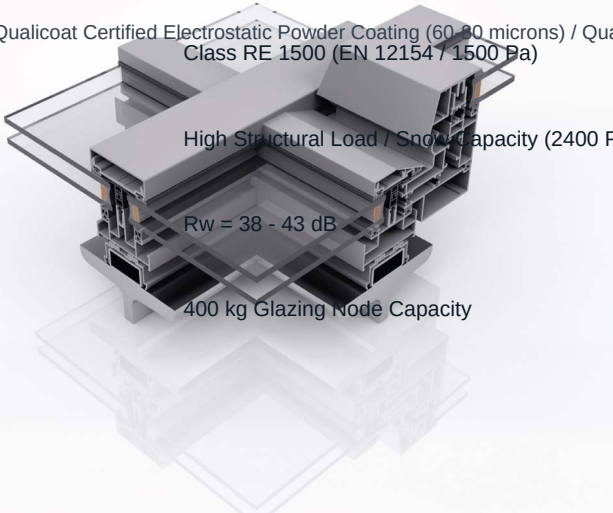

High Structural Load / Snow Capacity (2400 Pa)

Rw = 38 - 43 dB

400 kg Glazing Node Capacity

MECHANICAL & ARCHITECTURAL SPECIFICATION MATRIX

Base Aluminum Alloy

Frame Architectural Depth

Sash / Vent Profile Depth

Glazing Thickness Capacity

Thermal Barrier Insulation

Air Permeability (EN 12207)

Water Tightness (EN 12208)

Wind Load Resistance (EN 12210)

Acoustic Sound Reduction

Maximum Sash Weight Capacity

FABRICATION STANDARDS & QUALITY COMPLIANCE