



AINZARA ALUMINUM & GLASS PROCESSING


Industrial Area, Tripoli, Libya | P.O. Box 82144 | Tel: +218 92 429 5050 | info@ainzara.ly

ARCHITECTURAL SYSTEMS DIVISION | OFFICIAL TECHNICAL SPECIFICATION SHEET

IPA 30 - Minimalist Slimline Office Partition System

SERIES: IDA SERIES | SYSTEM CODE: IPA30 | EXTRUSION: EN AW-6063 T6

ENGINEERING 2D CAD PROFILE SCHEMATIC

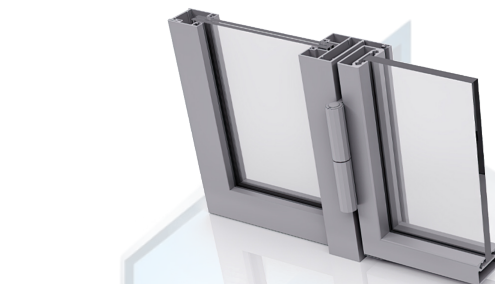

MECHANICAL & ARCHITECTURAL SPECIFICATION MATRIX

MANUFACTURING STANDARD

Base Aluminum Alloy	EN AW-6063 T6 (Extrusion to EN 12020-2)
Frame Architectural Depth	30 mm Ultra-Slimline Visible Profile
Sash / Vent Profile Depth	Minimalist Micro-Channel Glazing
Glazing Thickness Capacity	8 mm - 12 mm Monolithic Tempered Safety Glass
Thermal Barrier Insulation	Acoustic Rubber Gasket Clamp Seals
Air Permeability (EN 12207)	Interior Commercial Specification
Water Tightness (EN 12208)	Interior Commercial Specification
Wind Load Resistance (EN 12210)	Interior Non-Load Bearing Barrier
Acoustic Sound Reduction	Rw = 34 - 38 dB
Maximum Sash Weight Capacity	70 kg Glass Door Leaf

FABRICATION STANDARDS & QUALITY COMPLIANCE

- Extrusion Tolerances: Conforms strictly to EN 12020-2 / DIN 17615 high precision architectural standard.
- Surface Coating: Qualicoat Certified Electrostatic Powder Coating (60-80 microns) / Qualanod Anodizing (15-20 microns).
- Gaskets: EPDM weatherseals according to DIN 7863. Hardware groove: Standard European groove compatibility.
- Quality Management: Extruded and assembled under certified ISO 9001:2015 industrial manufacturing systems.

FACTORY DIRECTIVE: Official technical specifications verified for tender submissions, fabrication, and structural installation.

DIRECT CONTACT: +218 92 429 5050 | +218 91 614 1616 | Tripoli Industrial Complex, Libya | www.ainzara.ly