



AINZARA ALUMINUM & GLASS PROCESSING


Industrial Area, Tripoli, Libya | P.O. Box 82144 | Tel: +218 92 429 5050 | info@ainzara.ly

ARCHITECTURAL SYSTEMS DIVISION | OFFICIAL TECHNICAL SPECIFICATION SHEET

IPA 45 - Acoustic Double-Glass Office Partition System

SERIES: IDA SERIES | SYSTEM CODE: IPA45 | EXTRUSION: EN AW-6063 T6

ENGINEERING 2D CAD PROFILE SCHEMATIC

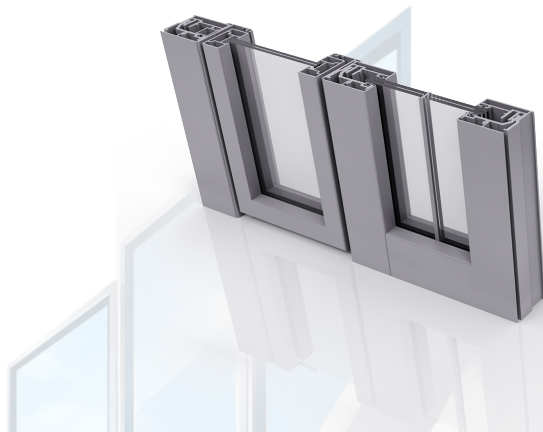

MECHANICAL & ARCHITECTURAL SPECIFICATION MATRIX

MANUFACTURING STANDARD

Base Aluminum Alloy	EN AW-6063 T6 (Extrusion to EN 12020-2)
Frame Architectural Depth	45 mm Perimeter Profiles / 100 mm Total Wall
Sash / Vent Profile Depth	Flush Internal Glazing with Integrated Blinds
Glazing Thickness Capacity	6 mm - 12 mm Double Acoustic Laminated Glass
Thermal Barrier Insulation	Acoustic Cavity Isolation (Rw = 42 - 46 dB)
Air Permeability (EN 12207)	Interior Commercial Specification
Water Tightness (EN 12208)	Interior Commercial Specification
Wind Load Resistance (EN 12210)	Interior Impact Safety Standard (BS 5234)
Acoustic Sound Reduction	Rw = 42 - 46 dB Certified
Maximum Sash Weight Capacity	80 kg Hinged Architectural Glass Door

FABRICATION STANDARDS & QUALITY COMPLIANCE

- Extrusion Tolerances: Conforms strictly to EN 12020-2 / DIN 17615 high precision architectural standard.
- Surface Coating: Qualicoat Certified Electrostatic Powder Coating (60-80 microns) / Qualanod Anodizing (15-20 microns).
- Gaskets: EPDM weatherseals according to DIN 7863. Hardware groove: Standard European groove compatibility.
- Quality Management: Extruded and assembled under certified ISO 9001:2015 industrial manufacturing systems.

FACTORY DIRECTIVE: Official technical specifications verified for tender submissions, fabrication, and structural installation.

DIRECT CONTACT: +218 92 429 5050 | +218 91 614 1616 | Tripoli Industrial Complex, Libya | www.ainzara.ly