



AINZARA ALUMINUM & GLASS PROCESSING


Industrial Area, Tripoli, Libya | P.O. Box 82144 | Tel: +218 92 429 5050 | info@ainzara.ly

ARCHITECTURAL SYSTEMS DIVISION | OFFICIAL TECHNICAL SPECIFICATION SHEET

SA 65 - Architectural Skylight & Atrium Roof System

SERIES: URAL SERIES | SYSTEM CODE: SA65 | EXTRUSION: EN AW-6063 T6

ENGINEERING 2D CAD PROFILE SCHEMATIC

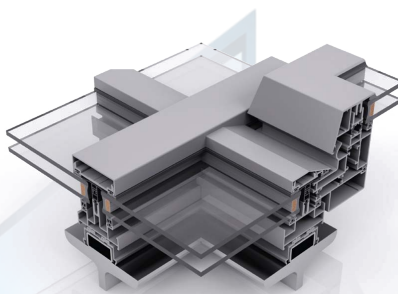

MECHANICAL & ARCHITECTURAL SPECIFICATION MATRIX

MANUFACTURING STANDARD

Base Aluminum Alloy	EN AW-6063 T6 (Extrusion to EN 12020-2)
Frame Architectural Depth	65 mm Face Width / 120 mm Rafter Spine Depth
Sash / Vent Profile Depth	Exterior Clamping Pressure Plate & Cap
Glazing Thickness Capacity	24 mm - 44 mm Stepped Solar Control IGU
Thermal Barrier Insulation	Multi-Stage Internal EPDM Condensation Troughs
Air Permeability (EN 12207)	Class AE 1200 (EN 12152 / 1200 Pa)
Water Tightness (EN 12208)	Class RE 1500 (EN 12154 / 1500 Pa)
Wind Load Resistance (EN 12210)	High Structural Load / Snow Capacity (2400 Pa)
Acoustic Sound Reduction	Rw = 38 - 43 dB
Maximum Sash Weight Capacity	400 kg Glazing Node Capacity

FABRICATION STANDARDS & QUALITY COMPLIANCE

- Extrusion Tolerances: Conforms strictly to EN 12020-2 / DIN 17615 high precision architectural standard.
- Surface Coating: Qualicoat Certified Electrostatic Powder Coating (60-80 microns) / Qualanod Anodizing (15-20 microns).
- Gaskets: EPDM weatherseals according to DIN 7863. Hardware groove: Standard European groove compatibility.
- Quality Management: Extruded and assembled under certified ISO 9001:2015 industrial manufacturing systems.

FACTORY DIRECTIVE: Official technical specifications verified for tender submissions, fabrication, and structural installation.

DIRECT CONTACT: +218 92 429 5050 | +218 91 614 1616 | Tripoli Industrial Complex, Libya | www.ainzara.ly