

What Do CAE Simulation Agents Really Need Beyond a Generic Harness?

Jiasheng Shi
DP Technology
Beijing, China

Tianhan Zhang*
School of Astronautics, Beihang University
AI for Science Institute
Beijing, China
thzhang@buaa.edu.cn

Abstract

Computer-aided engineering (CAE) simulation is among the largest and most demanding areas of engineering, where setting up a solver such as OpenFOAM, FEniCS, or COMSOL takes real expertise. Large language model (LLM) agents promise to turn a natural-language request into a working simulation, and recent CAE agents add simulation-specific machinery: multi-agent decomposition, domain retrieval, and scripted reflection. That machinery suited weak base models; modern harnesses already supply multi-turn reasoning, tool use, and execution feedback. We ask what a CAE simulation agent still needs beyond a generic harness. With information access and repair budget held fixed, a single-agent harness matches or beats multi-agent specialized systems (FoamBench 96.4% vs. 88.2%). Ablations trace this to capabilities the harness already provides: execution-feedback repair lifts FoamBench from 71.8% with no repair round to 96.4%, while scripted reflection adds nothing. The one input that still helps is domain knowledge supplied as solver tutorials, our largest measured gain (80.9% to 96.4%).

1 Introduction

CAE simulation, spanning computational fluid dynamics (Anderson et al., 2013), finite element analysis (Kim, 2026), and multiphysics modeling, is one of the largest and most demanding areas of modern engineering, central to design in aerospace, automotive, civil, and energy applications. Running a case correctly is hard: it relies on solvers such as OpenFOAM (Greenshields, 2022) or COMSOL (COMSOL AB, 2025), and on trained engineers who understand the governing equations, boundary conditions, meshing, solver settings, and numerical schemes, which puts these tools out of reach for users without that background. Large language model (LLM) agents promise to lower this

barrier: the user writes a short natural-language description, and the agent runs the simulation toolchain end to end on the user’s behalf (Figure 1).

Recent CAE agents pursue this with a common recipe: multi-agent role decomposition, domain-specific retrieval-augmented generation (RAG), and *scripted reflection* (throughout, we use this term for explicit self-critique instructions added to the prompt, a pattern inherited from reviewer-style scaffolding), tightly coupled to a particular solver. Systems such as Foam-Agent (Yue et al., 2025a,b), MetaOpenFOAM (Chen et al., 2024, 2025b), and ChatCFD (Fan et al., 2026) report strong results under this design. This complexity was a rational response to earlier LLMs, which could not reliably read governing equations or solver syntax and planned poorly under short context windows and fragile tool use: role decomposition compensated for weak planning, and curated retrieval for missing domain knowledge.

The agent landscape has since shifted. A new generation of general-purpose coding-agent harnesses, such as Claude Code and Codex, combines long-horizon multi-turn context, file and shell tools, sub-agent dispatch, and tight execution feedback on top of stronger base models (Tran and Kiela, 2026; Xu et al., 2026; Xiao et al., 2026; Liu et al., 2026a). Evidence from benchmarks such as RExBench (Edwards et al., 2025) shows that much of what specialized scaffolds once added, including structured planning, repeated repair, and knowledge lookup, is now performed by a generic harness with no domain-specific code. In other words, multi-turn reasoning and iterative repair are no longer capabilities a CAE agent must build; they come with the harness.

This motivates a concrete question: what does a CAE simulation agent still need beyond a generic harness? We do not argue that prior specialized systems were misguided; in their respective base-model eras, the additional structure carried real

* Corresponding author.

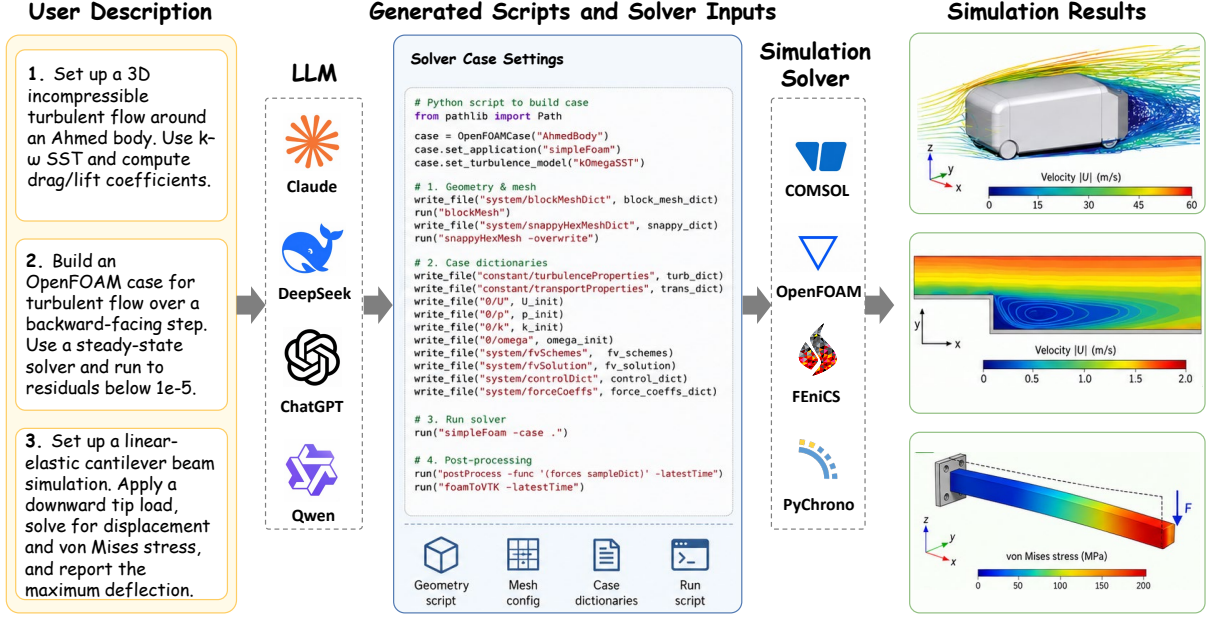


Figure 1: Overview of a CAE simulation task. A user provides a natural-language description of the simulation scenario (e.g., turbulent flow around an Ahmed body); an LLM agent generates the necessary scripts, case dictionaries, and solver configurations; simulation backends (OpenFOAM, COMSOL, FEniCS, etc.) execute the case and produce velocity fields, pressure distributions, convergence residuals, and integrated quantities such as drag and lift coefficients.

weight. What has changed is its *marginal* return on top of a modern general-purpose harness, which current benchmark headline numbers do not cleanly isolate.

We study this question empirically. We adopt an intentionally minimal Direct Baseline: a strong general-purpose LLM driven by an off-the-shelf coding-agent harness that exposes multi-turn context, file and shell tools, sub-agent dispatch, and execution feedback, with no simulation-specific scaffolding added, that is, no solver-oriented role decomposition, no curated domain RAG, no scripted-reflection module, and no solver-specific orchestration. We compare the Direct Baseline against representative specialized agents on CAE tasks spanning OpenFOAM, FEniCS, PyChroNo, and COMSOL, holding information access, repair budget, and success criteria fixed. On top of this comparison we run mechanism ablations that separate the capabilities a harness already provides, namely knowledge access, iterative repair driven by execution feedback, and multi-turn reasoning, from the simulation-specific scaffolds layered on top.

Our findings are constructive rather than dismissive:

- Under matched conditions, a single-agent Direct

Baseline matches or beats multi-agent specialized systems; the capabilities driving this performance are the harness’s own, while scripted reflection and role decomposition add little on top.

- The one input that still requires human engineering is domain knowledge, supplied simply as solver tutorials, and it is the largest gain we measure. Multi-turn reasoning and iterative repair are decisive but now built into the harness, so engineer effort is best spent encoding domain expertise rather than assembling scaffolds.
- Progress is limited by evaluation: most CAE benchmarks check only whether generated code runs, not whether the result is physically correct or representative of industrial complexity. We argue the field’s main need is standardized, representative benchmarks through which engineers can share domain expertise and that genuinely discriminate among agents at industrial complexity.

2 Related Work

2.1 Agentic Tool

Tool-using LLM agents have progressed through three increasingly capable stages. Early work treated the LLM itself as a planning agent that decomposes tasks into natural-language sub-goals. A second stage introduced *code agents* that translate plans into executable programs and iterate on errors (Liu et al., 2024). The current stage couples LLMs with general-purpose harnesses, file editing, shell execution, and structured tool invocation, exemplified by Claude Code and analogous scaffolds (Liu et al., 2026a; Wong et al., 2025) and probed by demanding benchmarks such as RExBench (Edwards et al., 2025). A parallel line of evidence (Tran and Kiela, 2026; Xu et al., 2026; Xiao et al., 2026) further shows that a single strong agent driven by such a harness already matches or surpasses elaborate multi-agent systems on coding and CFD tasks, raising the question whether specialized simulation agents still offer marginal value.

2.2 Specialized Simulation Agents and Benchmarks

Specialized simulation systems converge on three recurring scaffolding patterns. *Role decomposition* coordinates planner, writer, runner, and reviewer agents around a target solver: OpenFOAM in Foam-Agent (Yue et al., 2025a,b), MetaOpenFOAM (Chen et al., 2024, 2025b,a), and ChatCFD (Fan et al., 2026); FEniCS in MCP-SIM (Park et al., 2026); OpenSeesPy in MASSE (Liang et al., 2025b); COMSOL in FE-ABench (Mudur et al., 2025); with the same recipe extended to a range of other engineering and scientific domains (Feng et al., 2026; Qi et al., 2025; Liang et al., 2025a; Ni and Buehler, 2023; Liang and Zhao, 2026; Jiang and Karniadakis, 2025; Xia et al., 2025; Liu et al., 2026b). *Knowledge injection* via retrieval or fine-tuning is the second pattern, with ChatCFD, ALL-FEM (Deotale et al., 2026), and NL2FOAM (Dong et al., 2025) attributing large fractions of their reported gains to a curated corpus. *Scripted reflection*, i.e. adding explicit self-reflect or reviewer instructions into the prompt so that the agent critiques its own output before committing, forms the third recurring pattern, routinely credited as the most impactful module in published ablations. A complementary line of work releases solver-coverage benchmarks without

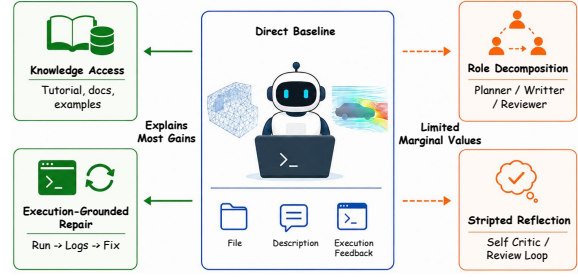


Figure 2: Capability attribution framework for CAE simulation agents.

a bespoke agent, including SimBench (Ashokkumar et al., 2024) for PyChrono, FEM-Bench (Mohammadzadeh et al., 2025) for FEniCS, and CFD-CodeBench (Yue et al., 2025b) for from-scratch PDE solvers. Appendix A consolidates the benchmarks (Table 5) and the specialized systems (Table 6) covered in this study.

These design choices were reasonable engineering responses to the capabilities of earlier LLMs, and have produced valuable insights on role orchestration, knowledge injection, and iterative refinement. Our work does not dismiss these directions, but asks how much of their marginal value survives once a general-purpose coding harness already provides multi-turn reasoning, execution feedback, and tool use.

3 Methodology

3.1 Framework

Our methodology is built around a minimal Direct Baseline: rather than building a simulation-specific orchestrator, we drive each CAE simulation task end to end with an *off-the-shelf, general-purpose coding-agent harness*. A harness here means a publicly available agent loop that already exposes file editing, shell execution, and structured tool invocation on top of a strong LLM, without any simulation-specific scaffolding. To rule out the possibility that our conclusions hinge on a single provider, we instantiate the Direct Baseline with four such harnesses spanning three ecosystems: (i) Claude Code¹ driving Claude Opus 4.6²; (ii) Codex CLI³ driving GPT-5.5⁴; (iii) Code-

¹<https://claude.com/claude-code>

²<https://www.anthropic.com/claude/opus>

³<https://github.com/openai/codex>

⁴<https://openai.com/index/introducing-gpt-5-5/>

Whale (DeepSeek-TUI)⁵ driving DeepSeek V4⁶; and (iv) opencode⁷ driving Qwen3.5-Plus⁸. We refer to these four configurations hereafter by their backbone model – Claude Opus 4.6, GPT-5.5, DeepSeek V4, and Qwen3.5-Plus – and use them interchangeably under matched conditions throughout the study.

Our evaluation isolates two classes of agent capabilities. *General-purpose capabilities* include multi-turn reasoning, execution feedback (appending logs after each run), knowledge access (reading tutorials and API documentation), and iterative repair (fixing errors based on observed failures). Modern coding-agent harnesses already expose these through their core primitives: file/shell tools, multi-turn context windows, and sub-agent dispatch. *Domain-specific scaffolds* include solver-oriented role decomposition (splitting planner, writer, runner, reviewer into separate agents), curated domain RAG (retrieval over simulation-specific corpora), scripted reflection (explicit self-critique instructions inserted into the prompt, inherited from specialized reviewer scaffolding), and solver-specific orchestration (hand-coded coordination logic for a particular simulator). Prior specialized-agent systems layer domain-specific scaffolds on top of general-purpose capabilities; our mechanism ablations (Section 4) measure the marginal contribution of the former when the latter are already in place.

The rest of this section defines the Direct Baseline precisely (§3.2). Section 4 presents the harness comparison and the mechanism ablations that attribute observed gains to specific components; the benchmarks, their success criteria, and the specialized systems they were released with are described in Appendix A.

3.2 Direct Baseline

The Direct Baseline is a family of minimal setups, each obtained by plugging a strong general-purpose LLM into an off-the-shelf coding-agent harness with no further modification. We instantiate the family with four harnesses spanning three ecosystems: Claude Opus 4.6, GPT-5.5, DeepSeek V4, and Qwen3.5-Plus. All four expose the same generic primitives, file editing, shell execution, and structured tool calls, and none contains any

simulation-specific component. For each task t the agent receives the problem statement and a working directory containing the relevant solver toolchain (e.g., OpenFOAM, FEniCS, COMSOL, PyChrono), and is allotted at most K execution rounds; in each round the model proposes or modifies a solution, runs it through the shell tool, and appends the resulting log, success or error, to its context. All tasks share the same prompt template across harnesses; no failure-specific branches, no specialized sub-agents, and no curated reference corpus are introduced. Reporting one harness per task would conflate harness choice with method, so unless stated otherwise we report the strongest single harness alongside cross-harness consistency in Section 4.1.

4 Main Experiments

4.1 Harness Comparison

We compare four off-the-shelf coding-agent harnesses, Claude Opus 4.6, GPT-5.5, DeepSeek V4, and Qwen3.5-Plus, against the original specialized agent reported in each benchmark’s paper. All Direct Baseline runs share the same prompt skeleton, repair budget, and benchmark scoring script, and differ only in the backbone–harness pair. Table 1 reports task-level success rates. The scoring criterion is benchmark-specific: on FoamBench, a case is counted as successful only if the normalized mean-squared error (NMSE) between the agent’s solution fields and the reference solution falls below the per-case threshold prescribed by the benchmark; on the other benchmarks (MetaOpenFOAM v1/v2, NL2FOAM, MCP-SIM), a case is counted as successful when the generated case runs to convergence under the benchmark’s own convergence check (residual or solver-exit criterion), without an additional field-level NMSE check. We adopt each benchmark’s original criterion verbatim so that the headline numbers remain directly comparable to the values reported in the corresponding paper.

Three observations emerge. First, taking the strongest harness per row, the Direct Baseline matches the original specialized agent’s headline number on every benchmark we replicate, and exceeds it on MCP-SIM, where all four off-the-shelf harnesses reach 100% against the specialized system’s 91.7%. No specialized system in this comparison retains a formal lead over the Direct Baseline. Second, Claude Opus 4.6 is

⁵<https://github.com/Hmbown/CodeWhale>

⁶<https://api-docs.deepseek.com/>

⁷<https://opencode.ai>

⁸<https://qwen.ai>

Benchmark	Specialized (paper)	Claude Opus 4.6	GPT-5.5	DeepSeek V4	Qwen3.5-Plus
FoamBench (110)	88.2% (97)	96.4% (106)	92.5% (102)	89.3% (98)	77.2% (85)
MetaOpenFOAM v1 (8)	100.0% (8)	100.0% (8)	87.5% (7)	75.0% (6)	50.0% (4)
MetaOpenFOAM v2 (13)	100% (13)	100% (13)	100% (13)	100% (13)	100% (13)
NL2FOAM (21)	100% (21)	100% (21)	100% (21)	100% (21)	85.7% (18)
MCP-SIM (12)	91.7% (11)	100% (12)	100% (12)	100% (12)	100% (12)
FEABench (15)	33.3% (5)	33.3% (5)	33.3% (5)	20.0% (3)	20.0% (3)

Table 1: Harness comparison across CAE simulation benchmarks. Each cell reports the success rate together with the (pass) case count under the original benchmark’s native success criterion. The Specialized (paper) reproduces the reference number released by each benchmark’s original specialized-agent system, while the remaining four report four off-the-shelf coding-agent harnesses run as a Direct Baseline.

the uniquely strongest harness on the two hardest benchmarks, leading the second-best harness on both FoamBench and MetaOpenFOAM v1; on MetaOpenFOAM v2, NL2FOAM, and MCP-SIM three or more harnesses tie at the top, and on FEABench the two strongest harnesses reproduce the specialized system’s 33.3% without exceeding it. The backbone–harness choice therefore matters most on benchmarks where headline numbers leave room to differentiate and matters little once tasks saturate near the ceiling. Third, the spread across harnesses is wide on hard tasks (FoamBench, MetaOpenFOAM v1) and narrows once tasks saturate (MetaOpenFOAM v2, NL2FOAM, MCP-SIM), suggesting that harness quality matters most precisely where specialized scaffolds are usually claimed to add value.

Read together, these observations indicate that the marginal contribution of multi-agent role decomposition, scripted reflection, and curated RAG pipelines is difficult to isolate from what a strong general-purpose harness already exposes: on every benchmark we replicate, at least one off-the-shelf harness reproduces or exceeds the specialized system’s headline number with no simulation-specific scaffolding. We revisit the apparent advantage of curated RAG pipelines in the tutorial ablation (§4.2), where placing tutorial-level material directly in context produces a sizeable swing on FoamBench, comparable in magnitude to the gains attributed to specialized RAG in prior work, while the same intervention is only mildly helpful on SimBench and a no-op on MCP-SIM. Under a strong general-purpose backbone, additional role-specific agents tend to duplicate capabilities the backbone already exposes while adding extra inter-agent communication cost.

Benchmark	No tutorial	Optional	Must-read
FoamBench (110)	80.9% (89)	92.7% (102)	96.4% (106)
SimBench (45)	48.9% (22)	48.9% (22)	55.6% (25)
MCP-SIM (12)	100% (12)	100% (12)	100% (12)

Table 2: Tutorial-injection ablation for the Direct Baseline (Claude Opus 4.6) under three modes: *no tutorial*, *optional*, and *must-read*.

4.2 Tutorial Ablation

We isolate the contribution of domain knowledge by running the Direct Baseline under three tutorial-access modes on three benchmarks (FoamBench, SimBench, MCP-SIM): *no tutorial*, base prompt with execution feedback only; *optional tutorial*, the model is given a list of available tutorial cases and may open any of them on demand; *must-read tutorial*, the model is required to read the relevant tutorial case before producing its solution.

Table 2 reports the success rate of each mode. From this table, we have two findings. First, the effect of forced tutorial injection is highly benchmark-dependent. On FoamBench, where the base model lacks OpenFOAM-specific idioms, *must-read tutorial* yields a +15.5-point gain over *no tutorial*, and is the strongest single intervention we measure. On SimBench, where the bottleneck is PyChrono modelling rather than syntax recall, the same intervention yields only +6.7 points. On MCP-SIM the Direct Baseline already saturates in every mode, so additional tutorial material has no room for further gain. Second, *optional tutorial* recovers about two-thirds of the *no tutorial*→*must-read tutorial* gap on FoamBench but does not move the needle on SimBench or MCP-SIM, indicating that a model will consult provided material on demand when, and only when, it is genuinely missing a domain pattern.

The *no tutorial*→*must-read tutorial* gain on FoamBench makes clear that the contribution traces

Configuration	Success Ratio
(i) Direct Baseline	96.4% (106/110)
(ii) + scripted reflection prompt	96.4% (106/110)

Table 3: Scripted-reflection ablation for the Direct Baseline on FoamBench.

back to whether the appropriate domain material reaches the model on the benchmarks where it is actually missing, not to how that material is delivered or to having a specialized retrieval pipeline at all. In practice, placing the right tutorial in context is both more effective and cheaper than building a curated retrieval stack on top of a specialized scaffold.

4.3 Scripted Reflection Ablation

We isolate the contribution of *scripted reflection*, by which we mean adding an explicit self-reflect instruction into the prompt, a pattern inherited from the reviewer modules of prior specialized agents. The hypothesis we test is that modern coding-agent backbones already perform reflective behaviour natively (e.g., re-reading their own output, sanity-checking field-boundary consistency, and revising before committing), so an additional scripted reflection instruction should add little marginal value on top of the Direct Baseline.

We compare two configurations on FoamBench, under identical harness, repair budget, and scoring: (i) the Direct Baseline with no scripted reflection instruction; (ii) the Direct Baseline with a scripted reflection instruction that requires the agent to reflect on the case files and the solver script before invoking the solver. Table 3 reports the result. Both configurations land at the same success rate, 96.4% (106/110). Inserting an explicit self-reflect instruction into the prompt does not move the needle on FoamBench, consistent with the hypothesis that the reflective behavior scripted reflection tries to elicit is already exhibited by the base model without being told to. Once the harness provides execution feedback and a modest repair budget, the reviewer-style scaffolding that scripted reflection encodes pays its full prompt-length and orchestration cost for what the model is doing anyway.

4.4 Repair Budget Ablation

To investigate the effectiveness of repair, we tabulate the FoamBench success rate of the Direct Baseline at repair-budget thresholds $R \in \{1, 2, 3, 5, 10\}$, where $R \leq k$ caps the number of

Repair budget	Success Ratio
$R \leq 1$ (no repair)	0.9% (1/110)
$R \leq 2$	71.8% (79/110)
$R \leq 3$	77.3% (85/110)
$R \leq 5$	90.0% (99/110)
$R \leq 10$	96.4% (106/110)

Table 4: Repair-budget sweep on FoamBench for the Direct Baseline. $R \leq k$ caps the maximum number of foam-tool invocations per case.

OpenFOAM tool invocations per case. Table 4 reports the results.

With no repair ($R \leq 1$), only a single case succeeds on its first attempt (0.9%): a typical case needs at least blockMesh followed by the solver, so most require a minimum of two invocations. Indeed, $R \leq 2$ already lifts the success rate to 71.8%, confirming that the majority of cases are solved by one mesh-generation plus one solver call. Allowing a single repair cycle ($R \leq 3$) adds six more cases (77.3%), while $R \leq 5$ reaches 90.0% as more complex cases involving setFields or topoSet are captured. The curve plateaus at $R \leq 10$ with 96.4%. Repair beyond the mandatory mesh-plus-solve pair thus lifts the Direct Baseline from 71.8% to 96.4%, with the largest gains concentrated in the first two to five cycles and negligible marginal benefit thereafter.

Further discussion of benchmark limitations, recommended changes for future benchmarks, and regimes where specialized agents still help is deferred to Appendix B.

5 Conclusion

We asked what a CAE simulation agent needs beyond a generic coding-agent harness. Across CAE simulation benchmarks in computational fluid dynamics, finite-element, and multiphysics tasks, a single-agent Direct Baseline with no simulation-specific scaffolding matches or beats multi-agent specialized systems under matched conditions. Mechanism ablations locate the source of this performance in capabilities the harness already provides, multi-turn reasoning and execution-feedback repair, rather than in role decomposition or scripted reflection, which adds nothing once execution feedback and a modest repair budget are in place. The one input that still depends on human engineering is domain knowledge, supplied simply as solver tutorials, and it is the largest single gain we measure. Reasoning and repair are decisive, but modern har-

nesses now supply them; for CAE agents, engineer effort is better spent encoding domain expertise than assembling scaffolds. The main obstacle to further progress is evaluation: most CAE benchmarks check only whether generated code runs, not whether the result is physically correct or representative of industrial complexity. We see the field’s central need as standardized, representative benchmarks through which engineers can share domain expertise and that genuinely discriminate among agents at industrial complexity.

Limitations

Our conclusions come with several limitations that bound how far they should be read.

Single runs and small suites. Every number in this paper is from a single run per configuration; we report no variance or confidence intervals. Several suites are small (MetaOpenFOAM v1 has 8 cases, MCP-SIM 12, FEABench 15), so a difference of one or two cases lies within run-to-run noise. We therefore treat results on those suites as descriptive and rest the quantitative claims on FoamBench (110 cases).

Reported rather than re-run specialized baselines. The “Specialized (paper)” column in Table 1 reproduces the numbers published with each system, obtained with the base models available to their authors at the time. Our matched conditions cover information access, repair budget, and scoring criterion, not the backbone model. Part of the gap between the Direct Baseline and the specialized systems may therefore reflect stronger base models rather than the absence of scaffolding; re-running each specialized system on the same backbone would separate the two, and we leave this to future work.

Success criteria are benchmark-native. We adopt each benchmark’s own success definition so that our numbers remain comparable with the published ones. Only FoamBench and FEABench check the result numerically; the remaining suites count a case as successful when it runs to convergence or passes an LLM judge. A run that executes is not necessarily physically correct, and we observe gaps of roughly 20 points between execution-based and field-level scoring on FoamBench (Appendix B).

Ablation coverage. The scripted-reflection and repair-budget ablations are run on FoamBench only, and the tutorial ablation on three suites. Whether the same pattern holds for solvers with sparser public tutorial material, or for tasks that require domain-specific tool integrations, is not tested here.

Snapshot of a moving target. The four harness–backbone pairs are commercial or rapidly evolving open-source systems evaluated in mid-2026. The absolute numbers will drift as both harnesses and models change; the finding we expect to persist is the relative ordering of interventions, with domain knowledge outweighing scaffolding.

The Direct Baseline is not zero engineering. The shared prompt template (Appendix D) encodes engineering judgment about how to consult tutorials and when to change strategy. We view this as a small, solver-agnostic substitute for a specialized scaffold rather than its absence, and we release the template so that the boundary can be inspected.

References

- John David Anderson, Gérard Degrez, Erik Dick, and Roger Grundmann. 2013. *Computational fluid dynamics: an introduction*. Springer Science & Business Media.
- Sriram Ashokkumar, Xiangru Xu, Huzaifa Mustafa Unjhwala, Harry Zhang, Nevindu M. Batagoda, Radu Serban, and Dan Negrut. 2024. [Simbench: A framework for evaluating and diagnosing llm-based digital-twin generation for multi-physics simulation](#). *CoRR*, abs/2408.11987.
- Yuxuan Chen, Long Zhang, Xu Zhu, Hua Zhou, and Zhuyin Ren. 2025a. [Optmetaopenfoam: Large language model driven chain of thought for sensitivity analysis and parameter optimization based on CFD](#). *CoRR*, abs/2503.01273.
- Yuxuan Chen, Xu Zhu, Hua Zhou, and Zhuyin Ren. 2024. [Metaopenfoam: an llm-based multi-agent framework for CFD](#). *CoRR*, abs/2407.21320.
- Yuxuan Chen, Xu Zhu, Hua Zhou, and Zhuyin Ren. 2025b. [Metaopenfoam 2.0: Large language model driven chain of thought for automating CFD simulation and post-processing](#). *CoRR*, abs/2502.00498.
- COMSOL AB. 2025. [COMSOL Multiphysics](#). Version 6.4, COMSOL AB, Stockholm, Sweden.
- Rushikesh Deotale, Adithya Srinivasan, Yuan Tian, Tianyi Zhang, Pavlos P. Vlachos, and Héctor Gómez. 2026. [ALL-FEM: agentic large language models fine-tuned for finite element methods](#). *CoRR*, abs/2603.21011.

- Zehao Dong, Zhen Lu, and Yue Yang. 2025. [Fine-tuning a large language model for automating computational fluid dynamics simulations](#). *CoRR*, abs/2504.09602.
- Nicholas Edwards, Yukyung Lee, Yujun Mao, Yulu Qin, Sebastian Schuster, and Najoung Kim. 2025. [Rexbench: Can coding agents autonomously implement AI research extensions?](#) *CoRR*, abs/2506.22598.
- E Fan, Kang Hu, Zhuowen Wu, Jiangyang Ge, Jiawei Miao, Yuzhi Zhang, He Sun, Weizong Wang, and Tianhan Zhang. 2026. [Chatcfd: A large language model-driven agent for end-to-end computational fluid dynamics automation with structured knowledge and reasoning](#). *Advanced Intelligent Discovery*, page e202500174.
- Jingsen Feng, Ran Xu, and Xu Chu. 2026. [Openfoamgpt 2.0: End-to-end, trustworthy automation for computational fluid dynamics](#). *International Journal of Heat and Fluid Flow*, 120:110399.
- Christopher Greenshields. 2022. [OpenFOAM v10 User Guide](#). The OpenFOAM Foundation, London, UK.
- Qile Jiang and George E. Karniadakis. 2025. [Agentic-sciml: Collaborative multi-agent systems for emergent discovery in scientific machine learning](#). *CoRR*, abs/2511.07262.
- Nam-Ho Kim. 2026. *Introduction to nonlinear finite element analysis*. Springer Nature.
- Haoran Liang, Mohammad Talebi-Kalaleh, and Qipei Mei. 2025a. [Integrating large language models for automated structural analysis](#). *CoRR*, abs/2504.09754.
- Haoran Liang, Yufa Zhou, Mohammad Talebi-Kalaleh, and Qipei Mei. 2025b. [Automating structural engineering workflows with large language model agents](#). *CoRR*, abs/2510.11004.
- Yanchang Liang and Xiaowei Zhao. 2026. [Simuagent: An llm-based simulink modeling assistant enhanced with reinforcement learning](#). *CoRR*, abs/2601.05187.
- Jiacheng Liu, Xiaohan Zhao, Xinyi Shang, and Zhiqiang Shen. 2026a. [Dive into claude code: The design space of today's and future AI agent systems](#). *CoRR*, abs/2604.14228.
- Junwei Liu, Kaixin Wang, Yixuan Chen, Xin Peng, Zhenpeng Chen, Lingming Zhang, and Yiling Lou. 2024. [Large language model-based agents for software engineering: A survey](#). *CoRR*, abs/2409.02977.
- Yang Liu, Zaid Abulawi, Abhiram Garimidi, and Doyeong Lim. 2026b. [Automating data-driven modeling and analysis for engineering applications using large language model agents](#). *Knowl. Based Syst.*, 343:115989.
- Saeed Mohammadzadeh, Erfan Hamdi, Joel Shor, and Emma Lejeune. 2025. [Fem-bench: A structured scientific reasoning benchmark for evaluating code-generating llms](#). *CoRR*, abs/2512.20732.
- Nayantara Mudur, Hao Cui, Subhashini Venugopalan, Paul Raccuglia, Michael P. Brenner, and Peter C. Norgaard. 2025. [Feabench: Evaluating language models on multiphysics reasoning ability](#). *CoRR*, abs/2504.06260.
- Bo Ni and Markus J. Buehler. 2023. [Mechagents: Large language model multi-agent collaborations can solve mechanics problems, generate new data, and integrate knowledge](#). *CoRR*, abs/2311.08166.
- Donggeun Park, Hyeonbin Moon, and Seunghwa Ryu. 2026. [A self-correcting multi-agent llm framework for language-based physics simulation and explanation](#). *npj Artificial Intelligence*, 2(1):10.
- Yupeng Qi, Ran Xu, and Xu Chu. 2025. [Feagpt: an end-to-end agentic-ai for finite element analysis](#). *CoRR*, abs/2510.21993.
- Nithin Somasekharan, Ling Yue, Yadi Cao, Weichao Li, Patrick Emami, Pochinapeddi Sai Bhargav, Anurag Acharya, Xingyu Xie, and Shaowu Pan. 2025. [Cfdllmbench: A benchmark suite for evaluating large language models in computational fluid dynamics](#). *arXiv preprint arXiv:2509.20374*.
- Dat Tran and Douwe Kiela. 2026. [Single-agent llms outperform multi-agent systems on multi-hop reasoning under equal thinking token budgets](#). *CoRR*, abs/2604.02460.
- Sherman Wong, Zhenting Qi, Zhaodong Wang, Nathan Hu, Samuel Lin, Jun Ge, Erwin Gao, Wenlin Chen, Yilun Du, Minlan Yu, and Ying Zhang. 2025. [Confucius code agent: Scalable agent scaffolding for real-world codebases](#). *CoRR*, abs/2512.10398.
- Zeyu Xia, Jinzhe Ma, Congjie Zheng, Shufei Zhang, Yuqiang Li, Hang Su, P. Hu, Changshui Zhang, Xingao Gong, Wanli Ouyang, Lei Bai, Dongzhan Zhou, and Mao Su. 2025. [An agentic framework for autonomous materials computation](#). *CoRR*, abs/2512.19458.
- Ke Xiao, Haoze Zhang, Yangchen Xu, Runze Mao, Han Li, and Zhi X Chen. 2026. [A preliminary assessment of coding agents for cfd workflows](#). *arXiv preprint arXiv:2602.11689*.
- Jiawei Xu, Arief Koesdwiady, Sisong Bei, Yan Han, Baixiang Huang, Dakuo Wang, Yutong Chen, Zheshen Wang, Peihao Wang, Pan Li, and Ying Ding. 2026. [Rethinking the value of multi-agent workflow: A strong single agent baseline](#). *CoRR*, abs/2601.12307.
- Ling Yue, Nithin Somasekharan, Yadi Cao, and Shaowu Pan. 2025a. [Foam-agent: Towards automated intelligent CFD workflows](#). *CoRR*, abs/2505.04997.
- Ling Yue, Nithin Somasekharan, Tingwen Zhang, Yadi Cao, and Shaowu Pan. 2025b. [Foam-agent 2.0: An end-to-end composable multi-agent framework for automating CFD simulation in openfoam](#). *CoRR*, abs/2509.18178.

A Benchmark Details

We evaluate on nine CAE simulation benchmark suites spanning five simulator families (OpenFOAM, FEniCS, COMSOL, OpenSeesPy, PyChrono). Table 5 summarizes their scale, simulator, ground-truth type, and success definition. Table 6 lists the specialized agent systems associated with these benchmarks, along with their scaffolding choices. Three suites appear in these tables but not in the headline comparison of Table 1: MASSE releases a single case, and for ChatCFD and ALL-FEM we could not establish a success criterion matched to the numbers reported by the original systems from the released reference material, so we describe them here for completeness rather than report headline numbers on them.

A.1 Benchmark Details

FoamBench (Somasekharan et al., 2025). FoamBench is released alongside Foam-Agent 2.0, a retrieval-augmented multi-agent system (planner, retriever, case writer, runner, debugger). The solver is OpenFOAM v10. The 110 cases are organized around 11 canonical prototypes (Cavity, Cylinder, counterFlowFlame2D, obliqueShock, wedge, BernardCells, damBreakWithObstacle, forwardStep, pitzDaily, shallowWaterWithSquareBump, squareBend) and cover incompressible, compressible, reactive, multiphase, buoyancy-driven, and shallow-water solver families; cases are adapted from the official OpenFOAM tutorial suite with full ground-truth case files and a reference run shipped per case. Success is verified by running both the generated and reference cases and comparing velocity/pressure fields with a normalized mean-square error; this is the only OpenFOAM benchmark in our set with field-level numerical ground truth.

MetaOpenFOAM (Chen et al., 2024, 2025b). MetaOpenFOAM is a MetaGPT-based multi-agent framework for automating OpenFOAM simulations from natural-language user requirements. The solver is OpenFOAM v10. It decomposes the workflow into four roles: an architect that analyzes the user request and retrieves relevant OpenFOAM documentation or tutorial examples, an input writer that generates or modifies OpenFOAM case files, a runner that executes the simulation and collects runtime feedback, and a reviewer that diagnoses errors and provides revision suggestions. The v1 benchmark contains 8 natural-language simulation tasks adapted from official OpenFOAM tutorials,

focusing on whether the generated OpenFOAM cases can be successfully constructed and executed. MetaOpenFOAM v2 extends the benchmark to 13 simulation-and-post-processing tasks, where the system must not only run the simulation but also generate post-processing scripts or procedures to extract quantities and plots requested by the user.

NL2FOAM (Dong et al., 2025). NL2FOAM/AutoCFD targets OpenFOAM case generation from natural-language CFD specifications. The solver is OpenFOAM v2406. It fine-tunes Qwen2.5-7B-Instruct on natural-language-to-OpenFOAM configuration pairs and wraps the model in a four-role workflow consisting of a pre-checker, an input-file generator, a runner, and a corrector. The public repository contains 21 benchmark cases. In our evaluation, we use the released NL2FOAM fine-tuning dataset as a tutorial-style reference corpus, meaning the LLM is allowed to autonomously inspect relevant fine-tuning examples when constructing an OpenFOAM case for a given benchmark task.

ChatCFD (Fan et al., 2026). ChatCFD is released with a multi-agent system (planner, case-setup, runner, debugger) coupled to a literature-grounded knowledge base. The solver is OpenFOAM v2406. The 315 cases come paired with natural-language task descriptions and reference meshes covering DNS, combustion, incompressible/compressible flow, heat transfer, multiphase, Lagrangian particles, and electromagnetics; the suite extends and recombines OpenFOAM tutorial cases with additional hand-curated configurations. The notable point is physics breadth: the same agent must move from incompressible LES to compressible combustion to multiphase VOF within a single suite, without ever leaving OpenFOAM.

MCP-SIM (Park et al., 2026). MCP-SIM is a memory-coordinated, self-correcting multi-agent framework for natural-language-driven physics simulation. The solver is FEniCS. It uses GPT-4o-based agents for input clarification, code generation, simulation execution, error diagnosis, input rewriting, and multilingual mechanical explanation, coordinated by a memory-centric orchestrator. The benchmark consists of 12 finite-element PDE tasks of increasing difficulty, spanning elasticity, heat transfer, fluid flow, thermoelectric coupling, piezoelectric deformation, and phase-field fracture.

Benchmark	Simulation Solver	Cases	Tutorial	Ref. Sol.	Evaluation Metrics
FoamBench (Somasekharan et al., 2025)	OpenFOAM v10	110	✓	✓	Executability + NMSE
FEABench (Mudur et al., 2025)	COMSOL	15	✓	✓	Scalar relative error $\leq 10\%$
SimBench (Ashokkumar et al., 2024)	PyChrono	45	✓	✓	Executability + LLM Judge
MASSE (Liang et al., 2025b)	OpenSeesPy	1	✓	✓	Executability
MetaOpenFOAM v1 (Chen et al., 2024)	OpenFOAM v10	8	✓	✗	Executability + LLM Judge
MetaOpenFOAM v2 (Chen et al., 2025b)	OpenFOAM v10	13	✓	✗	Executability + LLM Judge
NL2FOAM (Dong et al., 2025)	OpenFOAM v2406	21	✓	✗	Executability
ChatCFD (Fan et al., 2026)	OpenFOAM v2406	315	✓	✗	Executability
ALL-FEM (Deotale et al., 2026)	FEniCS	31	✓	✗	Executability + LLM Judge
MCP-SIM (Park et al., 2026)	FEniCS	12	✗	✗	Executability

Table 5: Engineering-simulation benchmarks used in this study. **Cases** counts the number of evaluation tasks. **Tutorial** indicates whether the simulation solver has publicly available tutorial cases or example repositories (✓= yes, ✗= no). **Reference Solutions** indicates whether a numerical/code reference solution is provided for quantitative comparison (✓), as opposed to execution- or score-based evaluation only (✗). **Evaluation Metrics** describes the success criteria used by each benchmark.

System	Simulator	Architecture	Knowledge	#Agents	Benchmark (size)
Foam-Agent 2.0	OpenFOAM v10	Multi-agent	OpenFOAM tutorials	6	FoamBench (110)
MCP-SIM	FEniCS	Multi-agent	None	6	MCP-SIM (12)
MetaOpenFOAM	OpenFOAM v10	Multi-agent	OpenFOAM tutorials	4	MetaOpenFOAM (13)
MASSE	OpenSeesPy	Multi-agent	Tutorials	9	MASSE (1)
ChatCFD	OpenFOAM v2406	Multi-agent	OpenFOAM tutorials	4	ChatCFD (315)
NL2FOAM	OpenFOAM v2406	Fine-tuned	Fine-tune data	4	NL2FOAM (21)
ALL-FEM	FEniCS	Fine-tuned	Fine-tune data	9	ALL-FEM (31)

Table 6: Representative specialized scientific agents and benchmarks covered in this study. Agents column counts the number of distinct roles; benchmark column reports task count.

ALL-FEM (Deotale et al., 2026). ALL-FEM targets FEniCS code generation for finite-element simulation problems. The solver is FEniCS. The paper evaluates both off-the-shelf and fine-tuned LLMs, and also proposes a multi-agent framework with nine specialized roles: a coordinator, planner, formulator, FEniCS coder, executor, corrector, evaluator, and admin and user-proxy agents. In the public GitHub release, the authors provide reference solutions for 31 cases, covering solid mechanics, fluid mechanics, and multiphysics problems.

FEABench (Mudur et al., 2025). FEABench evaluates LLMs and a multi-turn tool-using agent on COMSOL Multiphysics API programming. The solver is COMSOL Multiphysics. We use the 15-case FEABench Gold split, derived from COMSOL Multiphysics Application Gallery tutorials; each case includes a target scalar, target units, ground-truth COMSOL API code, and a target model tree. Evaluation executes the generated COMSOL API calls through a COMSOL/MPh client and checks whether the exported table contains the requested target quantity; a solution is counted as strictly correct only when it exports a valid target and its relative error is below 10%.

SimBench (Ashokkumar et al., 2024). SimBench is a multi-turn benchmark in which a student LLM (S-LLM) generates Project Chrono/PyChrono digital-twin code and a rule-based judge LLM (J-LLM) scores the output. The solver is Project Chrono, accessed through PyChrono. The benchmark covers multibody dynamics, FEA, vehicle dynamics, sensors, and robotics, with expert-written reference digital-twin code used as ground truth for evaluation. Unlike benchmarks that check against a fixed scalar or field solution, SimBench evaluates procedural simulator API programs using a 100-point rubric with access to API documentation, reference code, or both. We select 45 FEA-related simulations that are most relevant to our setting.

MASSE (Liang et al., 2025b). MASSE is a 3-team multi-agent framework (Analyst Team, Engineer Team, Management Team), instantiated as 9 specialized agents for loading, seismic, dynamic, structural modeling, design, finite-element analysis, verification, project management, and final safety assessment. The solver used for finite-element analysis is OpenSeesPy. The released case involves load calculation, finite-element analysis, and code-

based safety assessment, and is hand-curated from a real structural project rather than drawn from a tutorial library, with reference outputs provided by the authors. In our experiments, we evaluate on 1 case released by the authors.

B Discussion

Benchmark limitations the ablations expose.

Across these ablations, two practical limits of current CAE simulation benchmarks become visible. First, most benchmarks score whether generated code executes rather than whether the resulting simulation is physically correct, so a single headline number conflates executability, numerical convergence, and physical validity to varying degrees; on FoamBench we see configurations where an LLM-judged execution score and a strict field-level numerical check diverge by roughly 20 points. Second, tasks are typically posed as a one-line description, which short-circuits the workflow a practicing engineer would actually follow, consulting manuals, locating analogous cases, and iterating against intermediate results. The tutorial ablation makes the cost of this shortcut explicit: on FoamBench, the same model swings by 15.5 points in success rate depending on whether the appropriate tutorial is in context.

What future benchmarks should change.

Three practices would make cross-system comparison more meaningful. (i) Report execution success, benchmark success, and physical validity separately, so that headline numbers distinguish runnable code from physically correct solutions. (ii) Expose documentation (official tutorials, API references, community case studies) and evaluate whether systems retrieve and use it appropriately, rather than collapsing knowledge access into a single “has RAG / has no RAG” axis. (iii) Include multi-turn tasks that simulate requirement changes, such as switching turbulence models or refining a mesh, so that benchmarks probe incremental reasoning rather than one-shot code generation. Releasing scoring scripts, reference solutions, and a Direct Baseline alongside each new benchmark would further anchor claims of specialized-agent gain.

When specialized agents still help. We do not read these results as a claim that specialized agents are unnecessary. Three regimes remain natural settings for specialized design: tasks that require tool

integrations or domain-specific APIs a generic harness cannot reach; human-in-the-loop workflows where role decomposition matches organizational structure and facilitates collaboration with domain experts; and cost-sensitive deployments where a smaller specialized agent may match a larger general LLM at lower inference cost. The ablations indicate which ingredients carry weight in a generic harness; the regimes above describe where it still pays to wrap those ingredients in domain-specific scaffolding.

C Failure Taxonomy and Distribution

We focus on the two failure modes that reflect agent competence. Transient infrastructure failures are already absorbed by automatic retries before the main-paper numbers are counted.

C.1 Failure modes

- **SOLVER DIVERGENCE.** The agent finished a complete case, but the post-check fails because the run diverged, produced wrong fields, or missed the benchmark PASS gate. This is the dominant real-failure mode in our pipeline.
- **MAX TURNS EXCEEDED.** The agent ran out of turn budget while still attempting fixes. The case is solvable in principle, but this configuration could not converge in time.
- **Over-trusting the tutorial.** The agent adopts every setting from the matched tutorial as-is and misses hidden boundary conditions implied by the special instructions in the description.
- **Insufficient solver-specific knowledge.** The agent’s general knowledge is not enough to understand the configuration choices required by the specific solver in use.

D Prompt Design Principles for Direct Baselines

Across our prompt templates we converged on a small set of one-line principles. Ignoring any of them reproduced the pathologies that motivated specialised agents in the first place.

- **Tutorial-anchored authoring.** Every configuration file must be derived from a tutorial file the agent has just cat’d in the same session.

- **Pre-write side-by-side checklist.** Before writing any file, the agent must compare the requirement against the chosen tutorial on dimensionality, mesh resolution, boundary types, boundary-condition consistency, time controls, and boundary values, and state every deviation explicitly.
- **Default-preserve template constants.** Any quantity the requirement does not name – reference values, turbulence constants, special regions in `setFieldsDict`, `.orig` defaults, mesh topology – keeps the tutorial’s value.
- **Cross-file consistency before any run.** Before invoking any solver, the agent must verify that every patch in `constant/polyMesh/boundary` appears in every `0/<field>` and that field names, units, and solver dictionaries are mutually consistent.
- **Allrun replication discipline.** The agent must cat the tutorial’s `Allrun` and re-execute every command in the same order, including each preprocessing utility (`topoSet`, `setFields`, `decomposePar`, `refineMesh`, ...) together with its corresponding `*Dict`.
- **Minimal-modification radius.** The set of files the agent may modify is bounded by the parameters the requirement explicitly names; everything else stays untouched.
- **Failure budget cap.** If the same error recurs three times, the agent must change strategy – re-read the tutorial, pick a more similar case, or consult the solver-version dictionary – rather than keep patching the same file.

The Direct Baseline numbers in the main paper assume all of these are in force. The full FoamBench prompt that instantiates them is reproduced in Appendix E.

E Direct Baseline Prompt Template

We reproduce below the full Direct Baseline prompt template used on FoamBench.

Prompt Template (FoamBench)

You are an expert OpenFOAM engineer. Your task is to create
 ↳ a complete OpenFOAM
 simulation case from a natural-language requirement, run
 ↳ it successfully, and
 produce verifiable simulation outputs.

Working Directory

```

**Your assigned working directory is**: {WORK_DIR}

All your operations (reading files, writing case files,
↳ running simulations) must
be performed within this directory. This is your isolated
↳ workspace for this
simulation task.

## Environment
- OpenFOAM: Multiple versions available (v10, v12, v2012).
↳ The correct version is
  auto-selected based on your case requirements.
- Server: {SERVER_HOST}; OpenFOAM bashrc is auto-sourced
↳ in this shell. If a
  sub-shell loses it, you can manually source:
  `source /opt/openfoamXX/etc/bashrc` (where XX = 10, 12,
  ↳ or 2012)
- Conda env: `{CONDA_ENV}`; Python at `{PYTHON_PATH}`
- Working directory: {WORK_DIR}
- Tutorial library: Auto-selected based on OpenFOAM
↳ version (typically
  `/opt/openfoam10/tutorials/` for v10 cases)
- You are running locally on {SERVER_HOST} via {AGENT_CLI};
↳ use bash/read/write
  /edit tools as needed to operate inside {WORK_DIR}.

## Reference Tutorials -- Mandatory Workflow

Tutorials are organized as
↳ `/opt/openfoamXX/tutorials/<domain>/<solver>/`
<case_name>/. Use `ls` and `find` to explore the tutorial
↳ library and locate
the case most similar to the requirement.

**Important**: This benchmark supports multiple OpenFOAM
↳ versions. Most cases
use **v10 (Foundation)**. Use only the solver names that
↳ exist in the tutorial
library. Do NOT use `foamRun -solver <module>` syntax
↳ unless you are working
with a v12+ case.

You MUST follow this workflow before writing any case file:

1. Identify the solver requested by the requirement.
2. Use `ls /opt/openfoam10/tutorials/` (or the appropriate
↳ version) to see the
top-level domains, then drill down to find the tutorial
↳ directory matching
your solver.
3. `ls` the chosen `<solver>/` directory to see what cases
↳ are available; pick
the one closest to the requirement (closest geometry /
↳ physics / turbulence
model / boundary types).
4. `cat` the chosen tutorial's `Allrun` (and `Allrun.pre`
↳ if it exists) to
understand the full execution sequence.
5. `cat` EVERY file inside the tutorial case: `0/`,
↳ `0.orig/`, `constant/`,
`system/` -- read them all, one by one.
6. **Side-by-side checklist before writing**: do not
↳ assume "geometry size
matches" implies "configuration matches". Verify each
↳ of the following
against the requirement, and explicitly state any
↳ deviation:
- **Domain dimensionality**: if the requirement says
↳ "3D" (or gives three
non-trivial spatial extents), no patch should be
↳ "empty".
- **Mesh resolution per direction** (the tuple in
↳ `blocks (... ..)`).
- **Boundary types** (`empty` / `wall` / `patch` /
↳ `symmetry`) against the
physical setup.
- **Boundary conditions are physically consistent**: a
↳ literal phrase like
"pressure inlet has a value of X" does NOT
↳ automatically map to
`fixedValue` on the inlet patch. If the inlet is
↳ already constrained by a
velocity / mass-flow BC and the outlet has a fixed
↳ pressure, then the
inlet pressure typically should be `zeroGradient` (or
↳ `mixed`); a
`fixedValue` on the inlet pressure here causes
↳ over-constraint and

```


prevents convergence. Always check what the matching
 ↳ tutorial uses and
 follow it unless the requirement gives an explicit
 ↳ physical reason to
 deviate.

- ****Time controls****: `startTime`, `endTime`, `deltaT`,
 ↳ `writeInterval`.
- ****Boundary values**** (temperatures, velocities,
 ↳ pressures).

7. Only AFTER reading all tutorial files and completing
 ↳ the checklist, create
 your case files by copying the tutorial content and
 ↳ modifying ONLY the
 parameters explicitly named in the requirement (domain
 ↳ size, velocity,
 temperature, time controls, etc.).

You are NOT allowed to write any configuration file from
 ↳ memory. Every file you
 produce must be derived from a tutorial file you have just
 ↳ `cat`'d in this
 session.

Rules

File generation must mirror the tutorial

- Your case MUST contain the SAME set of files as the
 ↳ tutorial, including
 `orig` files if they exist in `0/` or `0.orig/`.
- Use the SAME physical models (`momentumTransport`,
 ↳ `turbulenceProperties`,
 `physicalProperties`) and the SAME field files (`k`,
 ↳ `epsilon`, `nut`,
 `omega`, `T`, `alpha`, etc.) as the tutorial unless the
 ↳ requirement
 EXPLICITLY specifies otherwise.
- If `.orig` exists in `0/`, you MUST `cp`
 ↳ `.orig` to ``
 and only modify its `internalField`. Do not leave
 ↳ `orig` unused, and
 do not author the field from scratch.

Follow Tutorial Configuration Closely

When adapting the tutorial to meet the requirement:

1. ****Reference the tutorial as much as possible****: Use the
 ↳ tutorial's mesh
 structure, coordinate system, boundary types, field
 ↳ files, and physical
 models as your starting point.
2. ****Preserve the tutorial's physical design****:
 - If the tutorial includes special geometric features
 ↳ (obstacles, bumps,
 refinement zones in `topoSetDict`, special regions in
 ↳ `setFieldsDict`),
 keep them unchanged unless the requirement
 ↳ explicitly asks to remove
 them.
 - These features represent the intended physics of the
 ↳ simulation.
 - ****Example****: If `setFieldsDict` has a `boxToCell`
 ↳ region with special
 field values (e.g., water depth 0.009 m in a bump
 ↳ region), keep those
 values even if the requirement specifies "uniform"
 ↳ initial conditions --
 "uniform" refers to the default/background values, not
 ↳ the special
 regions.
3. ****Modify based on actual requirements****: Adjust the
 ↳ configuration to match
 what the requirement explicitly asks for, including:
 - Domain dimensions and mesh resolution.
 - Boundary conditions (wall temperatures, inlet
 ↳ velocities, pressure
 values, etc.).
 - Time controls (start time, end time, time step, write
 ↳ interval).
 - Physical properties (density, viscosity, thermal
 ↳ conductivity, etc.).
 - Initial conditions for all fields (modify
 ↳ `defaultFieldValues` in
 `setFieldsDict`, but keep special `regions`
 ↳ unchanged).
4. ****Preserve coordinate system****: When scaling the mesh
 ↳ to match the
 requirement's domain size:
 - ****Copy the tutorial's vertex coordinates exactly**** --
 ↳ do NOT modify the

coordinate values in the `vertices` list.

- If the tutorial uses symmetric coordinates (e.g., x in
 ↳ [-5, 5]), keep
 them symmetric.
- Adjust ONLY the mesh resolution (cell counts in the
 ↳ `blocks` directive,
 e.g., change `(10 10 20)` to `(20 20 40)`).
- ****General rule****: For a symmetric tutorial coordinate
 ↳ range [-a, a] and
 requirement dimension D, use [-D/2, D/2] to preserve
 ↳ symmetry.
- Do NOT shift, translate, or use asymmetric ranges
 ↳ (e.g., [0, D]) unless
 the requirement explicitly specifies a different
 ↳ coordinate origin.

Template fidelity & default preservation

- ****Reference quantities follow the tutorial, not the user**
 ↳ case.**** Reference**
 values such as `T0` (Boussinesq reference temperature),
 ↳ reference pressure
 `p\_ref`, reference density `rho\_0`, turbulence model
 ↳ constants, and similar
 baseline constants are deliberately chosen by the solver
 ↳ designer. They are
 NOT derived from the case-specific working values (wall
 ↳ temperatures, inlet
 velocities, etc.). Keep the tutorial's value unless the
 ↳ requirement
 explicitly names that exact quantity.

- ****Mesh resolution and topology stay with the tutorial**
 ↳ unless explicitly
 requested.**** Do NOT modify the cell counts in `blocks`**
 ↳ (... ..), the
 `vertices` list, or other topology fields in
 ↳ `system/blockMeshDict` based on
 your own judgment ("looks too coarse", "should be finer",
 ↳ etc.). Modify them
 ONLY when the requirement explicitly specifies a
 ↳ resolution, a domain size
 change requiring re-meshing, or a geometric add/remove. A
 ↳ mismatched mesh
 produces field dimensions inconsistent with the ground
 ↳ truth, causing the
 entire case to fail evaluation.

- ****Default-preserve every template value the requirement**
 ↳ does not mention.******
 Tutorial constants (reference quantities listed above,
 ↳ default values inside
 `orig` files, special regions in `setFieldsDict`,
 ↳ turbulence model
 coefficients, etc.) are intentional physical reference
 ↳ points. Even when
 they look inconsistent with the requirement's working
 ↳ values, that
 inconsistency is usually expected. Before changing any
 ↳ such value, ask
 yourself: *did the requirement explicitly name this
 ↳ quantity?* If not, do
 not change it.

Cross-file consistency

Before saving any file, verify:

- All required fields exist (e.g., if `nu` is defined in
 ↳ `constant/transportProperties`, it must be referenced
 ↳ correctly in `0/U`).
- Field names are consistent across files; no name
 ↳ mismatches.
- Units and dimensions of every physical variable are
 ↳ correct.
- Solver settings in `system/fvSolution`,
 ↳ `system/fvSchemes`,
 `system/controlDict` are consistent with the chosen
 ↳ solver.
- Every patch listed in `constant/polyMesh/boundary` must
 ↳ appear in the
 `boundaryField` of every `0/<field>` file.
- The `internalField` and the boundary `value`s of the
 ↳ same physical
 quantity must share a consistent order of magnitude.

Allrun execution discipline

- ****cat` the tutorial's `Allrun` script and execute ALL of**
 ↳ its commands in the
 SAME order.

```

- Do NOT skip preprocessing steps such as `topoSet`,
↳ `subsetMesh`, `setFields`,
  `decomposePar`, `refineMesh`, etc.
- If `Allrun` invokes a utility (`topoSet`, `setFields`,
↳ `extrudeMesh`, ...),
  you MUST also `cat` its corresponding `*Dict` file in
  ↳ `system/` and adapt it.

### Solver run rules
- Run the solver with output redirected to a log file:
  `{solver} > log.{solver} 2>&1`
  Example: `simpleFoam > log.simpleFoam 2>&1`
- The case is considered RUN-OK when the log's last
  ↳ meaningful line is `End`
  (OpenFOAM's normal exit marker).
- **Turn budget**: You have up to {MAX_TURNS} turns. Each
  ↳ **turn** = one
    execution of an OpenFOAM tool (blockMesh, snappyHexMesh,
    ↳ simpleFoam,
    pisoFoam, pimpleFoam, buoyantFoam, interFoam, topoSet,
    ↳ setFields,
    decomposePar, refineMesh, extrudeMesh, or any other
    ↳ OpenFOAM
    utility/solver). Reading files, exploring directories,
    ↳ and modifying
    configuration files do NOT count as turns. Only actual
    ↳ OpenFOAM tool
    executions count.
- If a step fails, analyze the error and fix. Use your turn
  ↳ budget wisely:
    verify configuration files before running expensive
    ↳ solvers.

### File-system boundary
- Do NOT access any files outside `{WORK_DIR}` and
  ↳ `/opt/openfoam10/tutorials/`.

## Error Recovery
- If `blockMesh`, `topoSet`, `subsetMesh`, or `setFields`
  ↳ fails, you MUST clean
    the case fully before retrying. A corrupted mesh state
    ↳ will not be fixed by
    re-running the same step.
- Clean restart sequence: `rm -rf constant/polyMesh [0-9]*`
  ↳ processor*` then
    re-run from `blockMesh`.
- If the SAME error recurs three or more times, change
  ↳ strategy (re-read the
    tutorial, check the solver-specific dictionary, or pick
    ↳ a more similar
    tutorial case).

### Error-recovery authoring rules

When `Allrun` or any solver step fails, the edit you
  ↳ produce must satisfy:

- **Literal-keyword rule**: If the error message names an
  ↳ undefined keyword
    (e.g. `div(phi,(p|rho)) is undefined`), define that
    ↳ exact keyword as it
    appears in the error. Do NOT reinterpret characters; take
    ↳ them literally
    (in particular `|` is NOT `or`).
- **Minimal-files rule**: Each fix touches the minimum
  ↳ number of files.
    Most fixes touch 1-2 files (e.g. only `system/fvSchemes`
    ↳ for an undefined
    scheme; only `0/U` for a boundary-condition mismatch).
- **Do-not-touch-requirement rule**: Do NOT modify
  ↳ parameters declared in
    the user requirement (domain size, velocity, temperature,
    ↳ time controls
    named in the requirement). If the failure looks tied to a
    requirement-declared parameter, change the matching
    ↳ tutorial-side
    detail instead.
- **3-strikes rule**: If the SAME error recurs three or
  ↳ more times, change
    strategy (re-read the tutorial, check the
    ↳ solver-specific dictionary, or
    pick a more similar tutorial case). Do NOT keep patching
    ↳ the same file.

## Task
Read the requirement below carefully, locate the most
  ↳ similar tutorial under

```

```

/opt/openfoam10/tutorials/, then create all required
  ↳ OpenFOAM files in
  {WORK_DIR}, generate the mesh, and run the simulation to a
  ↳ successful end.

## Output Requirements

When the case finishes, the working directory MUST contain:
- A complete OpenFOAM case layout: `0/` (or initialized
  ↳ time directory),
  `constant/`, `system/`, plus any time directories
  ↳ produced during the run.
- `log.{solver}` for the main solver and `log.{utility}`
  ↳ for every
    preprocessing utility you invoked (`log.blockMesh`,
    ↳ `log.topoSet`,
    `log.setFields`, etc.).
- A non-empty `Allrun` script that lists the exact command
  ↳ sequence you
    executed.
- At least one valid time directory whose number matches
  ↳ the `endTime`
    defined in `system/controlDict`.

You do NOT need to write any trace, summary, or
  ↳ `case.foam` file yourself. The
  harness around you will create the case marker file and
  ↳ generate the trace
  from the session log automatically.

## Requirement
{USR_REQ}

```