

Evidence-gated multimodal parsing and vectorization of architectural floor plans

Hongxuan Chen[†], Wenda Wang[†], Jiachen Lu, Qirui Shen, Zilong Huang, Lei He, Xinyue Dong,
Weixin Huang*

School of Architecture, Tsinghua University

[†] These authors contributed equally.

* Corresponding author: Weixin Huang; 3512232835@qq.com

Abstract

Architectural floor plans remain a high-friction barrier to archive digitization and early design-model preparation because heterogeneous graphics encode spatial semantics and editable geometry together. We introduce SALI-FP, an evidence-gated multimodal pipeline that converts a plan into reviewable semantic maps, objects, vectors, and relation records while constraining local revisions by image evidence. In a full production audit of 11,534 heterogeneous plans, SALI-FP produced structured outputs for every plan, including 752,510 valid polygon-bearing objects. The same output form has supported initial drawing digitization and design-model preparation in practical design work. Public-benchmark calibration is paired with a 30-case matched visual evidence set in Appendix F, where room-scale coverage, openings, oblique boundaries, and circulation continuity can be inspected directly. SALI-FP offers an engineering-oriented interpretation-to-geometry workflow for reviewed CAD/BIM preparation and existing-building information recovery.

Keywords: Architectural floor plan parsing; Semantic vectorization; Vision-language models; Evidence-gated agents; Large language models; Geometric reconstruction.

Highlights

- Evidence-gated multimodal parsing links floor-plan interpretation to geometry.
- Local evidence gates constrain semantic edits and retain recoverable states.
- Structured outputs are recovered for 11,534 heterogeneous architectural plans.
- Stage comparisons separate semantic revision from coordinate effects.

1 Introduction

Floor plans encode geometry, connectivity, and function in the same drawing. When editable CAD or building information modeling (BIM) sources are unavailable, raster archives become an important starting point for existing-building documentation, renovation surveys, and operations information. Recovering objects and their coordinates can reduce the need to reconstruct every geometric entity from linework, while retaining the source for dimensional and functional verification.

Rule-based approaches exploit line patterns and drawing conventions [1]. CubiCasa5K links annotated floor plans to multi-task learning [2]; Raster-to-Vector predicts junctions and structured geometry [3], while Floor-SP reconstructs room polygons [4]. Room-boundary-guided recognition couples room and boundary tasks [5]. VectorFloorSeg and self-constructing graph networks incorporate geometric relationships [6, 7]. These methods establish recognition and structural recovery as connected but distinct problems.

Heterogeneous drawings contain oblique boundaries, furniture, dimensions, and occupancy types that differ from training examples. Object detection [8], multi-unit corpora [9], and sparse point representations [10] address complementary aspects of this challenge. Beyond assigning pixel labels, geometric model initialization requires identifiable boundaries, recoverable coordinates, and explicit failure states.

We propose SALI-FP as an evidence-gated multimodal parsing method. Its central design separates contextual interpretation from authorization to change the drawing: a model proposes

semantic edits, deterministic rules screen the evidence, and a protected state connects accepted changes to structured output. Fig. 1 illustrates the task.

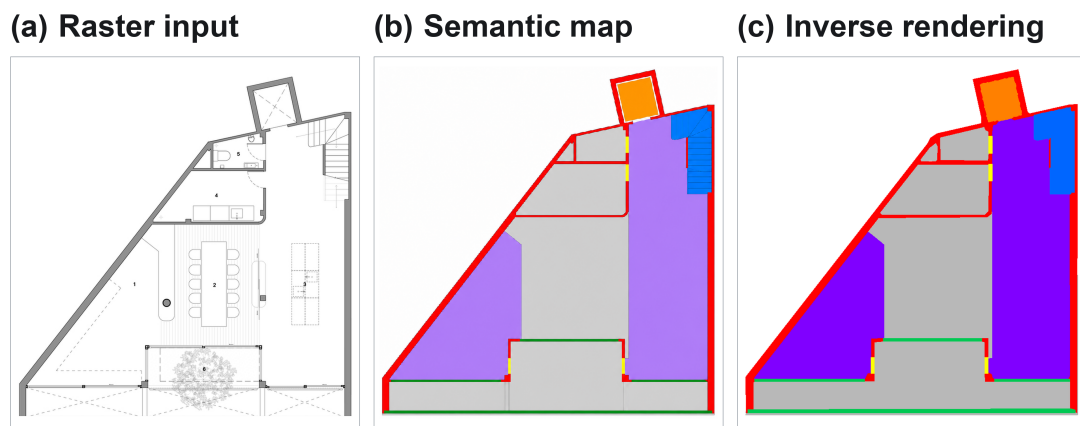


Fig. 1: Floor-plan recognition and vectorization: (a) source raster; (b) semantic output; (c) sparse inverse rendering.

We contribute an integrated parsing method, a corpus-scale execution study on Architecture Plans 10k (ArchP10k), and a multi-layer protocol linking recognition, geometry, and execution evidence. The evaluation connects shared-annotation calibration with corpus-scale delivery and direct visual inspection of complex drawings. Appendix F provides the latter evidence through 30 fixed, same-coordinate comparisons with localized observations of room coverage, openings, oblique boundaries, and circulation continuity.

Three research questions structure the evaluation: RQ1, how does the method recover semantic and vector representations for reviewed engineering use? RQ2, what recorded changes occur across audit, repair, and representation stages? RQ3, what structured outputs and residual failures emerge on complex heterogeneous plans? Sections 2–4 describe related work, the method, and evaluation settings; Sections 5–7 answer these questions through results, discussion, and conclusions.

2 Related research

2.1 Semantic segmentation and structural recovery

Existing methods span rule-based interpretation, supervised segmentation, junction prediction, and vector or graph decoding [1–7]. Pixel losses provide dense supervision, while explicit geometric recovery supplies valid polygon topology. Junction-based methods encode geometric relationships directly, and room-wise reconstruction makes spatial closure central to decoding. Architectural conventions and source-domain distributions influence all of these routes. Recent reviews emphasize the range of datasets and target tasks rather than a single interchangeable definition of floor-plan recognition [11].

Table 1. Research routes and the evidence required for comparison.

Route	Main output	Comparison boundary
Supervised segmentation [2, 5]	Pixel classes	Shared labels, canvas, and test split
Junction or polygon recovery [3, 4, 10]	Structured geometry	Native decoder and topology must be identified
Graph-based interpretation [6, 7]	Objects and relations	Align object and relation scope
Vision-language understanding [12–15]	Semantic or vector predictions	Evaluate localization explicitly
Tool-using agents [16–18]	Plans, actions, and state	Report execution and drawing evidence separately

2.2 Multimodal evidence and evidence-gated agents

Text recognition supplies room names and technical labels [19], while multimodal symbol spotting combines heterogeneous evidence [20]. LLM-based semantic layering [12] and WAFFLE [13] extend floor-plan understanding beyond a fixed pixel taxonomy. Visual language models can identify graphics semantically [14], and FloorplanVLM explores structured vector output [15]. SALI-FP uses these capabilities to connect semantic interpretation with localized, coordinate-aware action.

Agent schemas for building analysis separate planning, action, memory, and tools [16]. BIM coordination [17] and Text2BIM [18] show how language-based interaction can drive structured software operations. SALI-FP adapts this division of responsibility to floor-plan parsing: the audit model proposes a localized action, deterministic gates authorize the action, and state records retain its outcome.

2.3 Datasets and quantitative evaluation

CubiCasa5K provides a reproducible public raster/SVG evaluation setting [2]. Multi-unit plans [9] and FloorPlanCAD [21] cover different building scales or symbol tasks. The present quantitative comparison uses the official CubiCasa5K test plans, a shared target mapping, and frozen preprocessing so that recognition and representation evidence can be read on common coordinates.

2.4 Geometric interfaces and recent reproducible methods

BIM reconstruction from drawings [22], vector-to-energy-model editing [23], and tool-augmented IFC reasoning [24] require geometric and semantic attributes beyond a visually coherent mask. MiT-UNet [25] provides a recent released wall-segmentation checkpoint, Boundary IoU [26] measures contour agreement separately from region overlap, and Raster2Seq [27] releases polygon-sequence code and weights. FloorPlanFormer [28] contributes a related training formulation. The reproducible rerun set used here combines the released CubiCasa5K, MiT-UNet, and Raster2Seq implementations.

HEAT uses holistic edge attention for planar graph reconstruction [29], and RoomFormer predicts room polygons with two-level queries [30]. Their indoor benchmarks use projected 3D observations, whereas Raster2Seq [27] directly models raster-conditioned polygon sequences and is therefore included in our room-geometry comparison. We retain each method’s native output form when constructing the shared evidence tables.

Generative polygon refinement offers a complementary route. PolyDiffuse [31] uses guided set diffusion to refine polygon proposals; its indoor experiments condition on projected scan evidence rather than architectural raster semantics. Unlike proposal refinement with learned geometric priors, SALI-FP authorizes image-space changes using local evidence gates before constructing polygons.

3 SALI-FP method

SALI-FP integrates global parsing, local audit and gating, optional repair, and representation generation. Models interpret the drawing and propose changes; local operations decide admissibility, preserve a recoverable state, and construct geometric outputs. Fig. 2 links the complete data flow to the proposal gates, protected state selection, and representation operations.

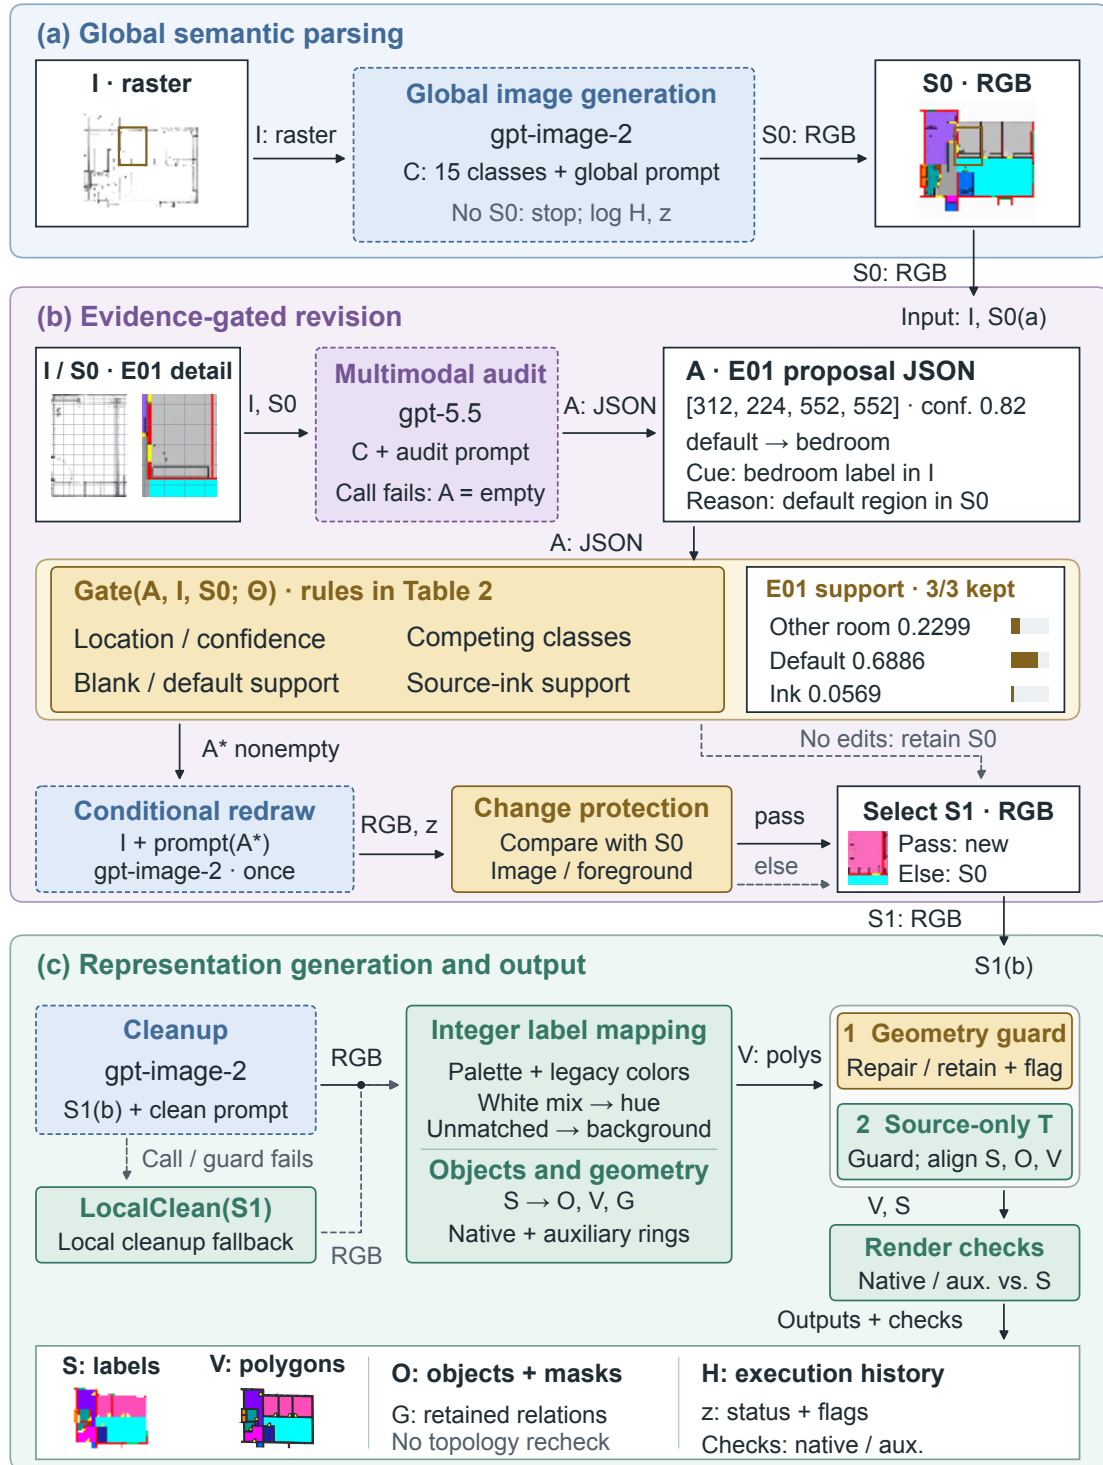


Fig. 2: SALI-FP architecture and evidence flow: (a) global semantic parsing; (b) evidence-gated revision and protected candidate selection; (c) representation generation and a connected output package. Rounded containers group operations; rectangular frames contain data and recorded evidence. Arrows identify data or selection conditions. The frozen CubiCasa5K test 0002 example supplies the images and E01 record; three accepted proposals illustrate the recorded evidence-gated execution. G retains generated relations. The local geometric extension is evaluated as a subsequent representation stage.

3.1 Problem definition and semantic representation

Let I be the input raster, $\mathcal{C}$ the fixed class set, and Θ the gate and representation configuration. Eq. (1) defines the outputs: integer labels S , objects O , vector geometry V , relation records G , history H , and status z . In G , $\mathcal{R}$ contains identified spatial objects and E_G contains generated relations. The intermediate S_0 and S_1 are RGB candidate images, S is the integer-label output, and H records execution history and retained states.

$$\mathcal{F}(I; \mathcal{C}, \Theta) = (S, O, V, G, H, z), \quad G = (\mathcal{R}, E_G). \quad (1)$$

The palette contains five component types, nine named spatial types, and one fallback type. RGB assignment first applies thresholded current/legacy palette matching, then white-mixture transition matching, and finally ordered hue rules; unassigned pixels become background. This order resolves anti-aliased and tinted outputs before geometric processing. Appendix A defines labels and Appendix B gives the executed predicates and archived settings.

3.2 Audit, gated repair, and failure handling

The initial candidate S_0 retains drawing context. The audit model reads I and S_0 with coordinate grids and returns proposals A containing a bounding box or polygon, current and expected classes, source evidence, a described candidate error, repair rationale, and confidence. Gate maps A to A^* by testing these fields against source pixels and the current labels. A nonempty accepted set triggers one source-conditioned redraw: the image model receives I and a repair prompt assembled from A^* , while S_0 serves as the audit reference and protected comparison. A passed guard selects the redraw as S_1 ; all other branches retain S_0 . This design gives every local action explicit spatial, class, and image-change support before it enters the structured output chain.

Table 2. Inspected proposal gates and image-change guards.

Condition	Setting and action
Confidence / target support	Reject below 0.80 / below 16 target pixels
Existing target label	Reject at 0.70 coverage; construction targets at 0.15
Other named room / blank or fallback	Reject at 0.30 other-room coverage / below 0.35 support
Source structure	Intensity below 170; require 0.02 dark support for non-door construction
Image-change fraction	Repair at most 0.55; cleanup at most 0.35
Cleanup foreground change	Non-white fraction changes by at most 0.15


Table 2 reports the frozen implementation settings that operationalize action authorization. Missing evidence, invalid locations, and incompatible class changes are screened before repair. Appendix B records predicate order, prompt provenance, and the local threshold replay.

SafeCall is the bounded request wrapper. The resume path checks stored success status, output size, and the generation-prompt hash; the evidence evaluations additionally freeze input and code hashes. H records response identifiers, attempts, exceptions, and retained state, while LocalClean applies deterministic palette assignment and local cleanup to the last valid image. Algorithm 1 makes semantic, geometric, and execution states explicit.

Algorithm 1 Evidence-gated multimodal floor-plan parsing**Input:** I, class set C, gate configuration Θ , image and audit models, frozen prompts**Output:** S, O, V, G, H, z

- 1: $S_0 \leftarrow \text{SafeCall}(\text{image model}, I, \text{global prompt})$
- 2: If S_0 is absent: record failure in H, z; return
- 3: $A \leftarrow \text{SafeCall}(\text{audit model}, I, S_0, \text{audit prompt})$
- 4: If audit fails: $A \leftarrow \text{empty}$; record audit degradation
- 5: $A^* \leftarrow \text{Gate}(A, I, S_0, \Theta)$; $S_1 \leftarrow S_0$
- 6: If A^* is nonempty:
- 7: $\text{Candidate} \leftarrow \text{SafeCall}(\text{image model}, I, \text{repair prompt assembled from } A^*)$
- 8: If comparison with S_0 passes protection: $S_1 \leftarrow \text{Candidate}$
- 9: Else: retain S_0 ; record protected fallback
- 10: $\text{Candidate} \leftarrow \text{SafeCall}(\text{image model}, S_1, \text{cleanup prompt})$
- 11: If cleanup fails or violates protection: $\text{Candidate} \leftarrow \text{LocalClean}(S_1)$
- 12: S $\leftarrow$ integer labels; extract O, V and relation records G
- 13: Validate V; accept guarded repair or retain object failure status
- 14: T $\leftarrow$ source-only anchoring(I, S); use identity if inadmissible
- 15: Apply T to S, O masks and V; restore state if geometry protection fails
- 16: Inverse-render V and auxiliary rings; record their separate RCR values
- 17: Preserve G as the generated relation record; record H and z
- 18: Return S, O, V, G, H, z

The normal path uses two image calls and one audit call; repair adds one image call. Each request allows at most three attempts, transient repair/cleanup failures permit one stage-level re-request, and a case allows at most three end-to-end attempts. Recovery reuses intact stages. Fig. 3 uses a public test example distinct from Fig. 1; its stages are measured jointly in Section 5.3.



(a) Source raster

Drawing coordinates
and fine line evidence




(b) Initial candidate

Global semantic
interpretation




(c) Protected repair

One recorded
prompt-guided revision



(d) Cleanup

Color-to-label
normalization



(e) Final representation

Labels aligned to
source-line evidence

Fig. 3: Recorded stages of cubicasa5k_test_0001: (a) source; (b) initial candidate; (c) protected repair; (d) cleanup; (e) final source-aligned labels.




3.3 Geometric output and Rhino interface

Representation generation uses two complementary geometric layers. Native sparse objects store simplified exterior and hole rings; auxiliary rendering groups use class-specific smoothing and expansion for raster replay. Source-only enhanced correlation coefficient (ECC) registration [32] aligns accepted coordinates to drawing line evidence, and linework repair [33] admits invalid-object corrections under raster-change and positive-area guards. Appendix B specifies both layers. The retained model outputs precede this subsequently evaluated local extension.

Eq. (2) defines internal render-consistency rate (RCR) on the non-background union. We report RCR separately for delivered sparse geometry and auxiliary rendering rings, thereby separating representation agreement from the annotation-aligned recognition and geometry measures reported in Appendix C.

$$U = \{p : S(p) \neq 0 \vee \hat{S}(p) \neq 0\}, \quad \text{RCR} = \frac{\sum_{p \in U} \mathbf{1}[S(p) = \hat{S}(p)]}{|U|}. \quad (2)$$

Labeled footprints and openings provide inputs for Rhino wall, slab, and opening operations (Fig. 4). The illustrated interface establishes the handoff from semantic-vector output to model construction; project workflows then apply their source-coordinate, scale, and extrusion specifications.

(a) From semantic representation to geometric entities**(b) Model example I****(c) Model example II****(d) Model example III****Fig. 4:** Semantic-to-Rhino interface and retained model illustrations.

4 Corpus and experimental design

4.1 ArchP10k collection and governance

We organize web-sourced architectural plans by source project and recorded building category. Exact SHA-256 duplicates and 64-bit perceptual-hash candidates with Hamming distance at most 6 undergo relationship review. Removing 174 duplicates from 11,708 inputs yields 11,534 working images standardized to 1024×1024 pixels. Source links, categories, and governance records are retained separately from predictions.

The corpus contains 7,210 residential and 4,324 other plans. Frozen project-level partitions contain 9,225 development, 1,157 validation, and 1,152 test plans; development denotes a study partition, not supervised model training. The hard subset contains the 400 highest-complexity test plans. Table 3 summarizes the evidence; Appendix A retains source-group counts and predicted semantic composition.

Table 3. ArchP10k research corpus and evidence.

Item	Record
Working plans / format	11,534 / 1024×1024 PNG
Development / validation / test	9,225 / 1,157 / 1,152
Hard subset	400 within test
Independent-reference annotation package	200 stratified tasks
Release governance	Source-specific access, privacy, and redistribution review

4.2 Public GT and baseline protocols

CubiCasa5K provides 4,200 training, 400 validation, and 400 test plans [2]. All 400 test plans enter pixel evaluation on the same aspect-preserving 1024×1024 canvas. The shared evaluation targets structural boundary, door/opening, window, and room: walls and railings form the first class, door/window labels override spaces, and SALI-FP stairs and elevators map to background within this common protocol.

We rerun the trained CubiCasa5K checkpoint with its official four-rotation handling and retain all 44 prediction channels. The native argmax and official polygon postprocessor are evaluated separately. Raster2Seq uses its released CubiCasa5K checkpoint and native room decoding, MiT-UNet retains its released wall-only configuration, and Table 4 identifies the output scope of each method.

Table 4. Official-weight baseline configurations.

Method	Preprocessing and decoder	Evaluation scope
CubiCasa5K [2]	Four right-angle rotations; full 44 channels	Four-class argmax; official polygon decoder
Raster2Seq [27]	256-pixel bicubic input; released EMA checkpoint	Native room polygons; room, corner, angle matching
MiT-UNet [25]	512-pixel native normalization; wall threshold 0.5	Visible walls only
SALI-FP	Retained image/audit outputs; frozen representation stage	Four common classes; stored sparse room geometry

Raster2Seq inference uses the repository’s pure PyTorch deformable-attention reference on CPU, with released weights loaded without training or architecture changes. CubiCasa5K retains its junction channels for polygon decoding. Code, checkpoints, adapters, and per-case outputs are hashed. Appendix C reports the resulting run conditions separately from published timing settings.

The original 60/40 validation allocation yields 44 calibration and 32 holdout outputs. Registration is selected on calibration, checked on holdout, and then frozen. The resulting comparisons use fixed inputs, transformations, and evaluation records; Appendix C gives the complete calibration and stage analyses.

4.3 Multi-layer evaluation and statistical analysis

We separate GT recognition, GT-referenced room geometry, representation cost, and corpus execution. Pixel metrics are pooled mean intersection over union (mIoU), mean class pixel accuracy (PA), overall accuracy (OA), and per-class IoU. Boundary IoU (BIOU) [26] averages ten diagonal-relative bands from 0.1% to 1.0%; boundary F1 and visible-wall cIDice [34] provide supplementary contour and centerline measures. Appendix B defines denominators and empty-set handling.

Native room, corner, and angle evaluation uses the Raster2Seq CubiCasa entry Evaluator_RPlan with room IoU above 0.5, corner tolerance 10 pixels on a 256-pixel canvas, and angle tolerance 5 degrees. GT follows official source-coordinate rounding, closing-token removal, upper-bound clipping, and the 100-pixel source-area cutoff before the frozen common-canvas transform. Every method uses the same disabled-overlap primary setting and enabled-overlap sensitivity setting. Geometry evaluation contains 398 eligible room references, while the complete 400-case record is retained; the 5 failed CubiCasa polygon predictions contribute zero where an eligible reference exists. The common-canvas reruns provide a controlled comparison of the released methods, and angle is reported as its own geometric measure.

For accuracy-cost curves, every common-class raster passes through the same pixel-cell decoder with topology-preserving simplification at 0, 0.25, 0.5, 1, 2, 4, and 8 pixels. Each globally fixed tolerance is evaluated against GT. Appendix B and Tables C.9-C.10 additionally report the own-prediction fidelity measurement for representation analysis.

Public-test intervals use 10,000 paired bias-corrected and accelerated (BCa) bootstrap resamples. Pixel metrics pool confusion counts; native geometry first averages plan precision and recall and then computes their harmonic F1, with mean per-plan F1 reported separately. Every replicate repeats that aggregation. Corpus inference resamples source-project clusters, factor tests use Holm correction, and stage analyses report original coordinates alongside the same frozen final source-only transform applied to every stage. Interquartile ranges (IQRs) describe dispersion.

4.4 Implementation and reproducibility

Production records identify gpt-image-2 for image generation, repair, and cleanup, and gpt-5.5 for multimodal audit through an OpenAI-compatible gateway. Image editing takes images and text and returns 1024 × 1024 images; auditing takes two annotated images and text and returns structured suggestions. Production used 16 client workers. Deployment aliases, response identifiers, and frozen local materials establish the operational record; Appendix E documents the reproducibility inventory.

Existing model outputs are retained unchanged. Local representation export uses OpenCV 5.0.0, Shapely 2.1.2, and 8 CPU workers; shared pixel-cell extraction uses Rasterio 1.4.4. The new stage and official-weight comparisons make no image-model or audit-model API calls. Appendix E records exact code and weight hashes, prompt availability, compatible-runtime changes, and unresolved historical configuration gaps.

5 Results and analysis

5.1 Benchmark calibration and engineering-oriented evidence

RQ1 is answered through a deliberately linked engineering-evidence path. The CubiCasa5K protocol provides necessary annotation-aligned calibration on shared coordinates. Fixed-taxonomy pixel and room metrics, however, cannot alone show whether heterogeneous drawings retain coherent

spatial organization, editable geometry, and a traceable review path. The corpus audit establishes delivery of semantic, object, vector, relation, and state records at production scale. Appendix F makes the corresponding room-scale organization, opening retention, oblique boundaries, circulation continuity, and residual errors directly inspectable on matched complex plans. Appendix C retains the complete public-test scores, intervals, native-room measures, stage trajectories, and pixel diagnostics.

The principal contribution of SALI-FP is a complete, traceable interpretation-to-geometry chain. Table 5 records its delivered structure across the full ArchP10k corpus; Fig. 5 shows how controlled calibration, corpus-scale output, and visual structural reading form one engineering-oriented evidence argument.

Table 5. Corpus-scale structured-output evidence.

Output layer	Delivered evidence	Scale	Engineering interpretation
Semantic labels S	Nonempty normalized semantic map	11,534 / 11,534 plans	Common input to object and geometry extraction
Objects O	Typed shape records	783,299 shapes	Explicit semantic units for review
Native vectors V	Polygon-bearing objects passing the delivery audit	752,510 / 783,299 (96.07%)	Editable geometry with retained status
Relations G	Generated relation pairs	1,591,739 pairs	Preserved structural context for downstream inspection
Trace H, z	State and recovery records	11,534 plans	Recoverable execution and review path

Complementary evidence for the SALI-FP parsing chain


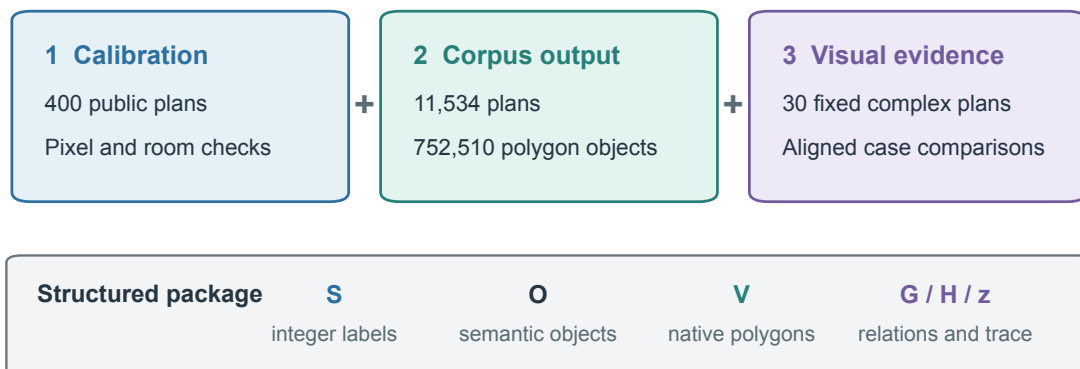


Fig. 5: Evidence route for SALI-FP. Strict public-test calibration, full-corpus structured output, and fixed visual comparisons answer complementary parts of the evaluation. Detailed baseline scores and diagnostics are retained in Appendix C; the 30 matched complex-plan comparisons are in Appendix F.

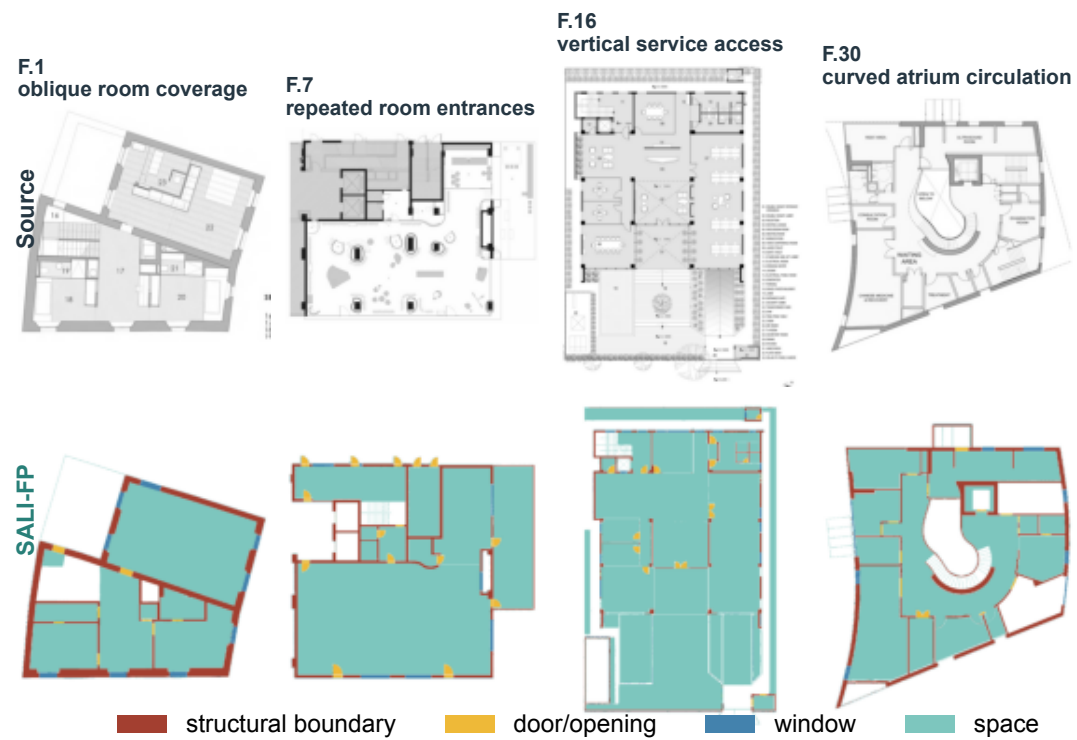

Each index opens a same-canvas, multi-method comparison with two aligned detail regions in Appendix F.

Fig. 6: Entry points to the fixed visual-evidence set. Each source/SALI-FP pair corresponds to a full, matched baseline comparison with two aligned detail regions in Appendix F.1, F.7, F.16, and F.30; Appendix F contains all 30 cases.

Appendix F is an integral RQ1 result rather than supplementary illustration and should be inspected alongside the calibration tables. Its 30 fixed complex-plan pages use common canvases, paired local regions, and case-specific observations to expose room-scale coverage, opening retention, nonorthogonal boundaries, circulation continuity, and residual errors. The complete score tables in Appendix C provide the complementary population-level calibration.


5.2 Full-corpus output and geometric validity

All 11,534 ArchP10k plans produce nonempty structured outputs after recovery, answering the coverage component of RQ3. The corpus yields 783,299 shapes, 15,002,422 control points, and 1,591,739 generated relation pairs. Of these objects, 752,510 (96.07%) carry polygon geometry that passes the delivery audit. Fig. 7 connects output coverage, geometric readiness, representation scale, and retained execution states across the complete SALI-FP chain.

Residual object identities and geometric causes remain attached to the review record, making the delivered representation directly inspectable. Tables C.18–C.21 provide the full cause taxonomy and category cross-tabs. This traceability is central to SALI-FP: it delivers a structured starting point for review, revision, and later modeling work.

5.3 Recorded stage changes and gating

The recorded stages make every intervention path inspectable. Across ArchP10k, 5,273 plans trigger one revision and 6,261 retain the initial candidate; 11,481 audit proposals yield 8,033 accepted actions and 3,448 rejected actions, while 2,181 plans record a protective state or fallback. Appendix Tables C.11, C.16, and Fig. C.7 provide the complete coordinate-conditioned stage analysis, paired intervals, and skipped-output record.

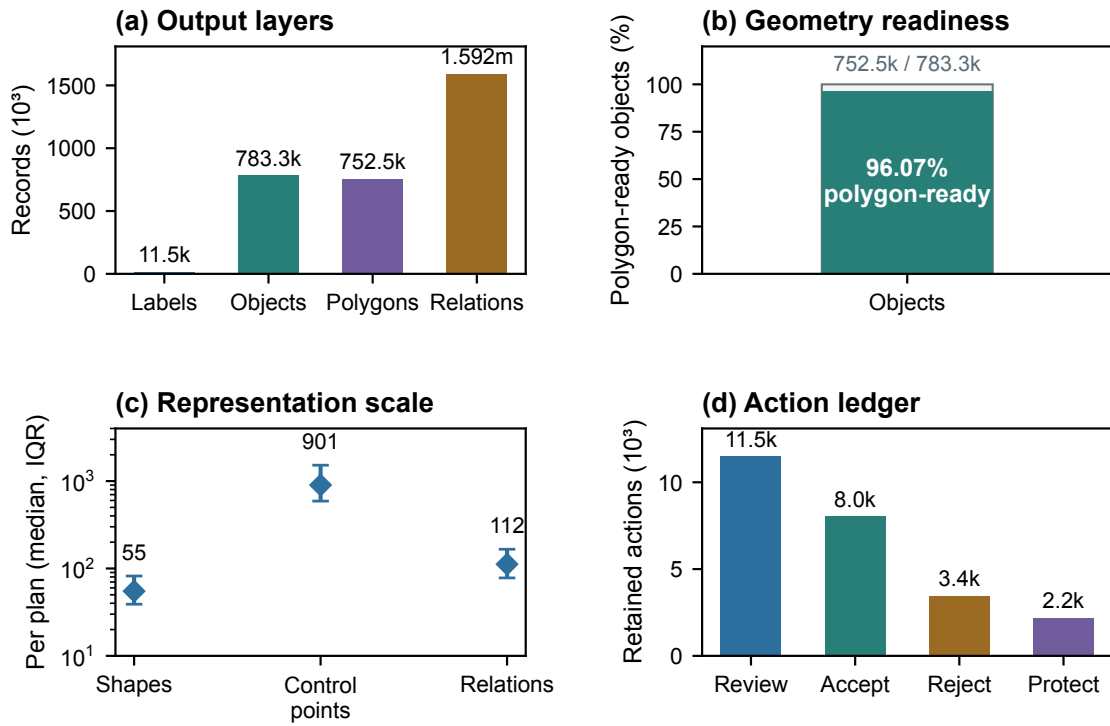

Counts describe retained execution records, not semantic-correctness labels.

Fig. 7: ArchP10k structured-output audit: (a) delivered output layers; (b) polygon-bearing geometry passing the delivery audit; (c) per-plan representation scale; and (d) retained audit-action records. Quantities have different denominators and are presented separately.

Complexity is associated with a larger representation burden: median control points rise from 651 to 1,288 across quartiles. Project-cluster analysis separates the five factors (Table D.1); hard versus non-hard patterns are retained in Table D.2. The fallback class occupies 16.85% of predicted foreground and 28.0% in office/education/research sources, locating functionally unresolved regions for later review.

5.4 Visual structural evidence and interface observations

Public error matrices and spatial diagnostics in Appendix Tables C.17 and C.22 and Fig. C.8 locate the calibration targets. Appendix F supplies their case-level engineering reading: every page aligns the source plan, official baselines, SALI-FP output, and two matched local regions, then identifies the visible structural evidence in that case. The resulting comparisons make room-scale completeness, aperture retention, oblique envelopes, and continuous circulation available for direct review.

6 Discussion and practical implications

6.1 Evidence-led method positioning

SALI-FP is designed for an architectural work unit that combines global reading, admissible local action, preserved state, and structured geometry in one inspectable process. The public benchmark anchors annotation-aligned localization, while the corpus audit and Appendix F demonstrate how the same process retains coherent rooms, openings, boundaries, and usable geometric records across heterogeneous drawings.

Fixed-taxonomy and pixel-alignment measures provide the annotation-aligned calibration reported in Appendix C and remain essential for comparable evaluation. They capture a different evidence layer from spatial organization, geometric editability, and review traceability. SALI-FP unifies these operational attributes with explicit gates, recoverable actions, corpus-scale output, and object-level geometry, thereby supplying the reviewed semantic-vector material required by downstream design workflows.

6.2 Deployment and reproducibility

The production audit records 39,875 logical calls and 41,931 HTTP attempts across the full corpus. Retained protocols, prompts where recoverable, input identifiers, output states, and local geometry records support inspection and local replay. The same semantic-object-vector output form has supported initial drawing digitization and design-model preparation in practical design work associated with the Architectural Design and Research Institute of Tsinghua University. This use connects visual interpretation to a reviewable geometry handoff. The resource profile is appropriate for asynchronous archive conversion and design-model preparation, where a reviewer can inspect the resulting semantic and geometric evidence before downstream use; detailed latency and reference-rate records are in Tables C.3 and C.19.

6.3 Evidence scope and geometric use

The study combines public annotation-aligned calibration, full-corpus structured-output coverage, and purpose-selected visual comparison. Together, these evidence scopes connect measured recognition, production-scale delivery, and design-relevant interpretation. The frozen 200-plan annotation package and the independent proposal-review package provide the next validation instruments for ArchP10k reference accuracy and decision quality.

For downstream solid construction, the exported status record identifies objects for review, while project-specific source-coordinate, opening, scale, and height specifications complete the model-construction workflow. Appendix E records the retained materials and the planned open-weight, repeatability, and annotation extensions.

7 Conclusion

We propose SALI-FP as an evidence-gated multimodal method that turns architectural floor-plan interpretation into a reviewable structured-geometry handoff. Its integrated chain combines global multimodal reading, explicit authorization of local revision, preserved execution state, and inspectable semantic-object-vector-relation output.

Across 11,534 heterogeneous ArchP10k plans, SALI-FP produces nonempty structured outputs for every plan and delivers 752,510 valid polygon-bearing objects. Appendix C supplies the complete public benchmark calibration; Appendix F supplies the matched visual evidence needed to inspect the method on complex rooms, openings, oblique envelopes, and circulation structure. Together, these results establish SALI-FP as an engineering-oriented workflow for reviewed architectural archive digitization, existing-building information recovery, and initial design-model preparation.

Data Availability

CubiCasa5K data and the released baseline code and weights are available from their authors [2, 25, 27]. The local reproduction package contains protocols, code and weight hashes, prediction identifiers, metric records, recoverable prompts, and annotation templates. Original predictions, derived geometry, and reviewer keys are maintained as distinct materials. ArchP10k follows source-specific access, external-processing, privacy, and redistribution governance; the public package stages reproducible materials while keeping reviewer keys and private source mappings protected.

Declaration of generative AI and AI-assisted technologies in the writing process

OpenAI Codex image generation (backend version not exposed) was used for architecture design studies on 2026-09-13 and 2026-09-15, including three alternative layouts for Fig. 2. The final figure was reconstructed with AI-assisted vector plotting code, independently typeset labels and data paths, and frozen experimental images and proposal records. Generated floor plans, pictograms, and unverified model-proposed connections were not used as scientific evidence.

AI tools assisted language editing, code preparation, and record-based analysis. The authors verified the analyses, approved the manuscript, and take responsibility for the publication disclosures.

References

- [1] Pizarro PN, Hitschfeld N, Sipiran I, Saavedra JM. Automatic floor plan analysis and recognition. *Automation in Construction* 2022;140:104348. <https://doi.org/10.1016/j.autcon.2022.104348>.
- [2] Kalervo A, Ylioinas J, Häikiö M, Karhu A, Kannala J. CubiCasa5K: A dataset and an improved multi-task model for floorplan image analysis. In: Felsberg M, Forssén PE, Sintorn IM, Unger J, editors. *Image Analysis, SCIA 2019. Lecture Notes in Computer Science*, vol. 11482. Springer; 2019. p. 28–40. https://doi.org/10.1007/978-3-030-20205-7_3.
- [3] Liu C, Wu J, Kohli P, Furukawa Y. Raster-to-Vector: Revisiting Floorplan Transformation. *2017 IEEE International Conference on Computer Vision (ICCV)* 2017:2214–2222. <https://doi.org/10.1109/ICCV.2017.241>.
- [4] Chen J, Liu C, Wu J, Furukawa Y. Floor-SP: Inverse CAD for Floorplans by Sequential Room-Wise Shortest Path. *2019 IEEE/CVF International Conference on Computer Vision (ICCV)* 2019:2661–2670. <https://doi.org/10.1109/ICCV.2019.00275>.
- [5] Zeng Z, Li X, Yu YK, Fu C. Deep Floor Plan Recognition Using a Multi-Task Network With Room-Boundary-Guided Attention. *2019 IEEE/CVF International Conference on Computer Vision (ICCV)* 2019:9095–9103. <https://doi.org/10.1109/ICCV.2019.00919>.
- [6] Yang B, Jiang H, Pan H, Xiao J. VectorFloorSeg: Two-Stream Graph Attention Network for Vectorized Roughcast Floorplan Segmentation. *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)* 2023:1358–1367. <https://doi.org/10.1109/CVPR52729.2023.00137>.
- [7] Knechtel J, Rottmann P, Haunert J, Dehbi Y. Semantic floorplan segmentation using self-constructing graph networks. *Automation in Construction* 2024;166:105649. <https://doi.org/10.1016/j.autcon.2024.105649>.
- [8] Xu Z, Jha N, Mehadi S, Mandal M. Multiscale object detection on complex architectural floor plans. *Automation in Construction* 2024;165:105486. <https://doi.org/10.1016/j.autcon.2024.105486>.
- [9] Pizarro PN, Hitschfeld N, Sipiran I. Large-scale multi-unit floor plan dataset for architectural plan analysis and recognition. *Automation in Construction* 2023;156:105132. <https://doi.org/10.1016/j.autcon.2023.105132>.

- [10] Xing J, Wu L, Zeng T, Wu Y, Shang J. Comprehensive floor plan vectorization with sparse point set representation. *Automation in Construction* 2025;173:106023. <https://doi.org/10.1016/j.autcon.2025.106023>.
- [11] Xu Z, Jha N, Mehadi S, Mandal M. Automatic floor plan analysis: Datasets, methods, and applications (2000–2025). *Automation in Construction* 2025;178:106378. <https://doi.org/10.1016/j.autcon.2025.106378>.
- [12] Kim T, Min B. Semantic Layering in Room Segmentation via LLMs. 2024 *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)* 2024;9831–9838. <https://doi.org/10.1109/IROS58592.2024.10801361>.
- [13] Ganon K, Alper M, Mikulinsky R, Averbuch-Elor H. WAFFLE: Multimodal Floorplan Understanding in the Wild. 2025 *IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)* 2025:1488–1497. <https://doi.org/10.1109/WACV61041.2025.00152>.
- [14] Nardoni V, Ali KN, Ziran Z, Marinai S. Visual Large Language Models for Graphics Understanding: A Case Study on Floorplan Images. *Proceedings of the 2025 ACM Symposium on Document Engineering* 2025:1–4. <https://doi.org/10.1145/3704268.3748681>.
- [15] Liu Y, Yang Z, Li Y, Yang Y. FloorplanVLM: A vision-language model for floorplan vectorization. *arXiv preprint arXiv:2602.06507*. 2026. <https://doi.org/10.48550/arXiv.2602.06507>.
- [16] Zhang L, Fu X, Li Y, Chen J. Large language model-based agent Schema and library for automated building energy analysis and modeling. *Automation in Construction* 2025;176:106244. <https://doi.org/10.1016/j.autcon.2025.106244>.
- [17] Dong Y, Zhan Z, Hu Y, Doe DM, Han Z. AI BIM coordinator for non-expert interaction in building design using LLM-driven multi-agent systems. *Automation in Construction* 2025;180:106563. <https://doi.org/10.1016/j.autcon.2025.106563>.
- [18] Du C, Esser S, Nousias S, Borrmann A. Text2BIM: Generating Building Models Using a Large Language Model-Based Multiagent Framework. *Journal of Computing in Civil Engineering* 2026;40:04025142. <https://doi.org/10.1061/JCCEE5.CPENG-6386>.
- [19] Schönfelder P, Stebel F, Andreou N, König M. Deep learning-based text detection and recognition on architectural floor plans. *Automation in Construction* 2024;157:105156. <https://doi.org/10.1016/j.autcon.2023.105156>.
- [20] Xing J, Gao G, Zeng T, Shang J, Han Y, Tao Z, et al. Multimodal integration for advanced floor plan symbol spotting. *Automation in Construction* 2026;181:106659. <https://doi.org/10.1016/j.autcon.2025.106659>.
- [21] Fan Z, Zhu L, Li H, Chen X, Zhu S, Tan P. FloorPlanCAD: A Large-Scale CAD Drawing Dataset for Panoptic Symbol Spotting. 2021 *IEEE/CVF International Conference on Computer Vision (ICCV)* 2021:10108–10117. <https://doi.org/10.1109/ICCV48922.2021.00997>.
- [22] Zhao Y, Deng X, Lai H. Reconstructing BIM from 2D structural drawings for existing buildings. *Automation in Construction* 2021;128:103750. <https://doi.org/10.1016/j.autcon.2021.103750>.
- [23] Liao X, Li B, Li N, Du C, Zhang S, Li G, et al. Semi-automated reconstruction and editing of building energy models from vector floor plans. *Automation in Construction* 2026;185:106882. <https://doi.org/10.1016/j.autcon.2026.106882>.
- [24] Gao Y, Hu F, Chai C, Weng Y, Li H. Multi-agent framework for schema-guided reasoning and tool-augmented interaction with IFC models. *Automation in Construction* 2026;186:106888. <https://doi.org/10.1016/j.autcon.2026.106888>.
- [25] Parashchuk D, Kaspshitskiy A, Karyakin Y. Enhancing floor plan recognition: a hybrid mix-transformer and U-Net approach for precise wall segmentation. *Machine Vision and Applications* 2026;37:53. <https://doi.org/10.1007/s00138-026-01815-y>.
- [26] Cheng B, Girshick R, Dollar P, Berg AC, Kirillov A. Boundary IoU: Improving Object-Centric Image Segmentation Evaluation. 2021 *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)* 2021:15329–15337. <https://doi.org/10.1109/CVPR46437.2021.01508>.
- [27] Phung H, Averbuch-Elor H. Raster2Seq: Polygon sequence generation for floorplan reconstruction. *ACM SIGGRAPH Conference Papers*; 2026. <https://doi.org/10.1145/3799902.3811124>.
- [28] Liang Y, Wu Z, Zheng R, Xie S, Hong B, Lin Y. FloorPlanFormer: Multi-Task Transformer Network for Floor Plan Recognition with Outer-to-Inner Feature Refinement. *Proceedings of the AAAI Conference on Artificial Intelligence* 2026;40:6916–6924. <https://doi.org/10.1609/aaai.v40i9.37625>.
- [29] Chen J, Qian Y, Furukawa Y. HEAT: Holistic edge attention transformer for structured reconstruction. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*; 2022. p. 3866–3875. https://openaccess.thecvf.com/content/CVPR2022/html/Chen_HEAT_Holistic_Edge_Attention_Transformer_for_Structured_Reconstruction_CVPR_2022_paper.html.
- [30] Yue Y, Kontogianni T, Schindler K, Engelmann F. Connecting the dots: Floorplan reconstruction using two-level queries. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*; 2023. p. 845–854. https://openaccess.thecvf.com/content/CVPR2023/papers/Yue_Connecting_the_Dots_Floorplan_Reconstruction_Using_Two-Level_Queries_CVPR_2023_paper.pdf.
- [31] Chen J, Deng R, Furukawa Y. PolyDiffuse: Polygonal Shape Reconstruction via Guided Set Diffusion Models. *Advances in Neural Information Processing Systems* 36; 2023. https://proceedings.neurips.cc/paper_files/paper/2023/hash/05f0e2fa003602db2d98ca72b79dec51-Abstract-Conference.html.
- [32] Evangelidis GD, Psarakis EZ. Parametric image alignment using enhanced correlation coefficient maximization. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 2008;30(10):1858–1865. <https://doi.org/10.1109/TPAMI.2008.113>. Implementation: OpenCV findTransformECC, version 5.0.0.
- [33] Gillies S, van der Wel C, Van den Bossche J, Taves MW, Arnott J, Ward BC, et al. Shapely, version 2.1.2. Software; 2025. <https://doi.org/10.5281/zenodo.5597138>. Algorithm documentation: https://shapely.readthedocs.io/en/2.1.2/reference/shapely.make_valid.html.
- [34] Shit S, Paetzold JC, Sekuboyina A, Ezhov I, Unger A, Zhylka A, et al. clDice: A Novel Topology-Preserving Loss Function for Tubular Structure Segmentation. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* 2021:16555–16564. <https://doi.org/10.1109/CVPR46437.2021.01629>.

A Semantic mappings and corpus composition

Table A.1. Semantic palette and common-class display mapping.

Class	RGB	Common target
wall	255, 0, 0	Structural boundary
door	255, 255, 0	Door/opening
window	0, 200, 83	Window
stair	0, 102, 255	Background (unmapped)
elevator	255, 128, 0	Background (unmapped)
living_room	0, 255, 255	Room
bedroom	255, 77, 184	Room
kitchen	128, 0, 255	Room
bathroom	0, 153, 153	Room
balcony	153, 255, 0	Room
entrance	255, 0, 255	Room
storage	128, 64, 0	Room
corridor	128, 128, 128	Room
study	32, 32, 160	Room
room_default	184, 184, 184	Room

SALI-FP stair and elevator labels have no separate target in the frozen common-class raster mapping and are mapped to background, not silently excluded from the denominator. All other SALI-FP space labels, including the fallback class, map to room. CubiCasa5K native room types map to room except walls/railings; native door/window icons override the room map. The common target is therefore a disclosed operational mapping rather than a claim that every source ontology is identical.

Table A.2. Source-group composition and predicted fallback-class share.

Source group	Plans	room_default / predicted non-background pixels
Residential	7,210	13.6%
Commercial and hospitality	942	15.1%
Office, education, and research	1,169	28.0%
Mixed use	305	20.4%
Civic, cultural, and health	941	27.2%
General interior	678	14.8%
Industrial and infrastructure	82	21.8%
Landscape and urban	53	17.9%
Unspecified source group	154	18.8%

Table A.3. Predicted semantic pixel composition of the full ArchP10k run.

Predicted class	Pixels	Share of predicted non-background pixels
living_room	1,419,369,397	24.21%
room_default	987,723,922	16.85%
bedroom	764,413,067	13.04%
wall	699,703,665	11.94%
balcony	487,712,685	8.32%
kitchen	349,764,932	5.97%
bathroom	284,839,808	4.86%
stair	281,147,325	4.80%
corridor	196,332,949	3.35%

Predicted class	Pixels	Share of predicted non-background pixels
window	130,412,363	2.22%
entrance	76,736,868	1.31%
door	69,874,801	1.19%
storage	39,998,446	0.68%
elevator	37,906,193	0.65%
study	36,222,820	0.62%

Pixel shares in Tables A.2-A.3 describe predictions. They cannot establish class prevalence in independently annotated drawings.

B Metric definitions and geometric audit

Let n_{ij} denote the number of GT-class i pixels predicted as j . Class IoU, class accuracy, mean PA, and mIoU are given in Eqs. (B.1)-(B.2). Background contributes to confusion counts and OA but not to the four-class means. Empty-class unions are undefined rather than perfect; available class values enter each plan-level boundary macro.

$$\text{IoU}_i = \frac{n_{ii}}{\sum_j n_{ij} + \sum_j n_{ji} - n_{ii}}, \quad \text{PA}_i = \frac{n_{ii}}{\sum_j n_{ij}}. \quad (\text{B.1})$$

$$\text{mIoU} = \frac{1}{|K|} \sum_{i \in K} \text{IoU}_i, \quad \text{mean PA} = \frac{1}{|K|} \sum_{i \in K} \text{PA}_i, \quad \text{OA} = \frac{\sum_i n_{ii}}{\sum_{ij} n_{ij}}. \quad (\text{B.2})$$

Boundary masks follow the official zero-padded erosion implementation [26]. The band width is the rounded image-diagonal fraction, with a minimum of 1 pixel. Ten fractions from 0.1% to 1.0% are evaluated; their mean, the four-class mean, and the plan mean define the reported BIoU. Eq. (B.3) applies to each class and band. The image-border padding is essential for a mask that touches the canvas.

$$\text{BIoU}_d(P, T) = \frac{|B_d(P) \cap B_d(T)|}{|B_d(P) \cup B_d(T)|}. \quad (\text{B.3})$$

Original validity is measured from stored exterior and hole coordinates without repair, using Shapely 2.1.2, positive area, nonempty geometry, and its validity predicate. Malformed inputs count as invalid. The separately versioned repair is evaluated on the same original object IDs. A valid geometry collection with polygon area counts as polygon-containing, but a collapsed line does not. Sparse objects and auxiliary rendering groups have different denominators; Table B.1 retains both.

Table B.1. Original and guarded-repair geometry denominators.

Item	Count
Original sparse objects	783299
Originally valid	673880
Valid polygon-containing objects after repair	752510
Accepted repairs	78630
Raster-guard rejection	22963
Collapsed without polygon	7820
Malformed inputs	6
All-object-valid plans after repair	2932
Original auxiliary render groups	825215
Invalid auxiliary render groups	21534

For boundary F1, let B_P, B_T be one-pixel contours and N_t the Euclidean neighborhood with radius t times the diagonal. Eq. (B.4) counts each predicted or reference boundary pixel once. Tolerances are 0.25%, 0.50%, and 1.00%; one absent boundary yields zero, while two absent boundaries are excluded with their count reported. Scores average over available classes and then plans.

Visible-wall cIDice [34] uses hard skeletons in the shared wall-evaluation domain, with precision and recall in Eq. (B.5). It measures centerline coverage, not door-room adjacency. Eq. (B.6) gives class Dice from pooled confusion counts.

$$p_t = \frac{|B_P \cap N_t(B_T)|}{|B_P|}, \quad r_t = \frac{|B_T \cap N_t(B_P)|}{|B_T|}, \quad \text{BF1}_t = \frac{2p_tr_t}{p_t + r_t}. \quad (\text{B.4})$$

$$p_c = \frac{|\text{skel}(P) \cap T|}{|\text{skel}(P)|}, \quad r_c = \frac{|\text{skel}(T) \cap P|}{|\text{skel}(T)|}, \quad \text{cIDice} = \frac{2p_cr_c}{p_c + r_c}. \quad (\text{B.5})$$

$$\text{Dice}_i = \frac{2n_{ii}}{\sum_j n_{ij} + \sum_j n_{ji}}. \quad (\text{B.6})$$

Table B.2. Frozen registration and numerical guards.

Setting	Value
Working resolution / ECC iterations / termination	512 pixels / 150 / 0.00001
Affine singular-value range / maximum ratio	0.65-1.35 / 1.25
Maximum rotation / corner displacement	5 degrees / 25% of diagonal
Foreground retained / source-score gain	At least 98% / strictly positive
Calibration source-gain candidates	0 / 0.01 / 0.03 / 0.06
Calibration selection	Maximum pooled mIoU; BIoU decline at most 0.005
Holdout acceptance	Pooled mIoU gain at least 0.02; BIoU decline at most 0.005; paired CI above zero
Polygon repair raster-difference cap	2% of before/after union
Affine numerical-repair area limit	max(1e-8, 1e-9 x absolute area)
On inadmissible registration or numerical repair	Identity transform; retain original frame

B.1 Representation-stage implementation and audit

The local extension operates on retained outputs and makes no model calls. It estimates an affine map from predicted structural boundaries to line evidence in the source drawing, using enhanced-correlation registration [32]. At 512-pixel working resolution, initialization combines identity and

similarity alignment. A candidate must improve the source-only structural overlap score, retain at least 98% of foreground, and satisfy scale, rotation, anisotropy, and displacement guards. The same map is applied to integer labels by nearest-neighbor sampling and to vector coordinates; classes are not reassigned. Failed or inadmissible registration retains identity. This source-driven criterion uses no GT at inference and is not itself an accuracy metric.

Invalid sparse geometry is processed separately with linework-based validity repair [33]. Originally valid coordinates are preserved. An invalid object's repair is accepted only when the raster symmetric difference is at most 2% of the before/after union and the result is valid with positive polygon area. Geometry collections can retain lower-dimensional remnants; a collapsed line is not counted as a usable polygon. Original objects, rejected changes, malformed inputs, and per-object dispositions remain auditable. Affine roundoff is repaired only within numerical-area and raster guards; otherwise the whole plan retains its original frame. Relation records are referenced but not recomputed, so repaired geometry does not establish corrected topology.

Postprocessing was selected on existing validation outputs, separately from the fixed test evaluation. Of a previously fixed 60/40 calibration/holdout allocation, 44 calibration and 32 holdout outputs were complete; the missing 16/8 cases were not replaced. Identity, similarity, and affine registration were compared on calibration only. The selected configuration improved holdout pooled mIoU from 0.1808 to 0.3794, with a paired plan-mean change of 0.2107 [0.1733, 0.2476]. The configuration was then frozen before applying it to all 400 test plans. Earlier raw test scores had already been inspected, so this is an exploratory follow-up, not a claim of an untouched-test development history.

The supervised reruns retain their released checkpoints and preprocessing. The frozen local extension uses OpenCV 5.0.0, Shapely 2.1.2, and CPU processing with 8 workers for the corpus export. A lookup over all 16,777,216 RGB colors accelerates the existing pixelwise classifier without changing its labels; equality was checked on 20 real outputs, randomized layouts, gradients, and legacy color aliases. No remote requests, retraining, new image generation, or test-GT registration are involved. The same source-only registration is also applied to each baseline as a sensitivity check, while unmodified baseline outputs remain the primary comparison. Code, input and output hashes, transforms, and fallback reasons accompany the derived release.

Of 783,299 original sparse objects, 673,880 are valid (86.03%). Guarded repair accepts 78,630 changes, raising valid polygon-containing objects to 752,510 (96.07%) and all-object-valid plans from 384 to 2,932. Rejected or collapsed objects are retained with explicit status, not silently deleted. Among accepted repairs, raster differences total 1,090,285 pixels over a 1,241,315,793-pixel union (0.0878%). Auxiliary rendering groups remain a distinct layer; their original validity rate is 97.39%. Appendix F retains the original 30-case illustration set and is not used to evaluate the new repairs.

Table B.3. Frozen shared-decoder representation protocol.

Setting	Value
Input	Same 400 test plans; final SALI-FP and native baselines
Extraction	Pixel-cell polygons; four-connectivity; retain holes and components
Simplification grid (pixels)	0, 0.25, 0.5, 1, 2, 4, 8; preserve topology
Fidelity thresholds	0.95, 0.98 (primary), 0.995; minimum nonempty-class IoU
Selection	Fewest vertices; then bytes; then tolerance
Serialization	Compact UTF-8 JSON; six decimal places; identical fields
Pixel replay	Pixel centers; room, boundary, door, window priority
Missing or empty input	Retain case in denominator; no compactness score

The experiment freezes source and code hashes before evaluating vector costs and makes no model calls. Zero-tolerance pixel-cell reconstruction is required to reproduce every source prediction exactly. Linework validity splitting resolves self-touching cell rings without deleting area. Polygon and hole counts are checked across every simplification candidate. Coordinates are serialized before raster replay, so quantization is included in the fidelity check. All selected candidates must be valid; a 100% valid fraction here is an admission condition of the shared decoder, not evidence that native model geometry is universally valid. BCa intervals that are undefined for degenerate statistics are recorded as unavailable rather than replaced with another interval method.

The shared-decoder quantity V_β in Eq. (B.7) is the smallest tested vertex budget whose classwise raster replay reaches fidelity β against its own prediction P . It is not a GT accuracy metric. N counts exterior and hole vertices without repeated closing points; $\mathcal{E}$ is the fixed tolerance grid.

$$F(P, V) = \min_{c: |P_c| > 0} \frac{|P_c \cap \hat{P}_c(V)|}{|P_c \cup \hat{P}_c(V)|}, \quad (B.7)$$

$$V_\beta(P) = \min_{\epsilon \in \mathcal{E}: F(P, V_\epsilon) \geq \beta, V_\epsilon \text{ valid}} N(V_\epsilon).$$

Table B.4. Gate predicates and parameter provenance.

Step	Evidence and decision
Schema and location	Require source-coordinate bbox, valid palette target, confidence and evidence fields
Confidence and area	Require confidence ≥ 0.80 and target mask ≥ 16 pixels
Current target protection	Reject existing target coverage ≥ 0.70 ; construction threshold 0.15
Named-room protection	Reject other named-room fraction ≥ 0.30
Room support	Require blank or fallback support ≥ 0.35
Construction support	Require source intensity < 170 over ≥ 0.02 of the region; door exception
Image-change protection	Repair 0.55, cleanup 0.35, non-white fraction change 0.15
Parameter origin	Inspected heuristic configuration; full historical source equivalence not established

Table B.5. Audit fields and coordinate roles.

Field	Meaning
bbox; source_coordinate_space	Rough source-image region; image1_source_plan
semantic_key; expected_semantic_key	Requested class from the frozen palette
current_semantic_key	Candidate class or white_or_unmapped / unknown
first_pass_problem; problem_evidence	Visible candidate error and supporting observation
source_evidence; fix_rationale	Drawing cue and rationale for the proposed correction
confidence; source_cues; reason	Model assessment and concise textual support
Source / candidate grids	32 / 64 pixels; source is the coordinate authority

The reproduction materials distinguish archived generation/repair/cleanup prompts from the audit prompt recovered from currently inspected source. Full audit text cannot be certified against every historical run. Retained records use deployment aliases rather than immutable snapshots; cache reuse in the inspected workflow checks output availability, successful status, prompt hash, and image size, not a complete historical model fingerprint. A content-addressed evaluation cache is frozen separately for this revision.

Integer-label assignment is pixelwise and order-dependent. Direct matches require every RGB channel to lie within 20 of a current or legacy palette entry; the minimum squared RGB distance wins, with palette order breaking ties. Only unassigned chromatic pixels enter white-mixture matching: the median channelwise mixture coefficient must lie in [0.06, 1.05], off-ray deviation must not exceed 24, and channel span must be at least 4. The first qualifying palette entry wins. Remaining pixels enter the ordered rules in Table B.7 only if value is at least 40, channel span at least 35, and they are not near-white background (minimum RGB channel at least 240 and span at most 25). Each rule claims only unassigned pixels; the remainder is background. Gray classes can be assigned by direct matching before the chromatic stages. The frozen RGB lookup performs assignment only, not object-size filtering or morphological cleanup. Its source hash matches the inspected classifier; historical object parameters are read from each saved pointset, not inferred from current defaults. Tables B.6–B.8 and the full configuration inventory preserve these distinctions.

Table B.6. Executed color-assignment stages.

Stage	Rule
1. Palette thresholds	Per-channel tolerance 20; minimum squared RGB distance; current and legacy aliases
2. White mixtures	Unassigned chromatic pixels; t in [0.06, 1.05]; off-ray ≤ 24 ; span ≥ 4
3. Ordered hue predicates	Unassigned, non-background pixels; value ≥ 40 ; span ≥ 35 ; Table B.7
4. Background	All remaining pixels receive integer ID 0
Frozen provenance	All-RGB LUT and classifier source hashes; stored pointset configuration per plan

Table B.7. Ordered hue predicates after direct and mixture matching; H is in degrees.

Order	Target	Predicate
1	wall	$((H \leq 15) \text{ or } (H \geq 350)) \text{ and } (R > 180) \text{ and } (G < 100) \text{ and } (B < 100)$
2	door	$(H \geq 45) \text{ and } (H \leq 68) \text{ and } (R > 180) \text{ and } (G > 180) \text{ and } (B < 100)$
3	window	$(H \geq 85) \text{ and } (H \leq 150) \text{ and } (G > 100) \text{ and } (R < 110) \text{ and } (B < 130)$
4	stair	$(H \geq 200) \text{ and } (H \leq 245) \text{ and } (B > 120) \text{ and } (R < 100) \text{ and } (G < 160) \text{ and } (\text{maxRGB} \geq 170)$
5	elevator	$(H \geq 20) \text{ and } (H \leq 44) \text{ and } (R > 180) \text{ and } (G > 70) \text{ and } (G < 180) \text{ and } (B < 120)$
6	living room	$(H \geq 170) \text{ and } (H \leq 192) \text{ and } (R < 90) \text{ and } (G > 190) \text{ and } (B > 190) \text{ and } (\text{maxRGB} \geq 220)$
7	bathroom	$(H \geq 170) \text{ and } (H \leq 192) \text{ and } (R < 90) \text{ and } (G \geq 90) \text{ and } (B \geq 90) \text{ and } (\text{maxRGB} < 220)$
8	living room	$(H \geq 176) \text{ and } (H \leq 196) \text{ and } (R < 130) \text{ and } (G \geq 180) \text{ and } (B \geq 190) \text{ and } (\text{maxRGB} \geq 200)$
9	bedroom	$(H \geq 315) \text{ and } (H \leq 350) \text{ and } (R > 180) \text{ and } (G \geq 50) \text{ and } (G \leq 170) \text{ and } (B \geq 120) \text{ and } (B \leq 235)$
10	bedroom	$(H \geq 316) \text{ and } (H \leq 340) \text{ and } (R > 180) \text{ and } (G < 60) \text{ and } (B \geq 100) \text{ and } (B \leq 210) \text{ and } (B * 100 < R * 90)$
11	kitchen	$(H \geq 255) \text{ and } (H \leq 290) \text{ and } (B > 150) \text{ and } (R \geq 80) \text{ and } (R \leq 215) \text{ and } (G < 130)$
12	balcony	$(H \geq 68) \text{ and } (H \leq 100) \text{ and } (R \geq 120) \text{ and } (G \geq 150) \text{ and } (B < 120)$
13	entrance	$(H \geq 290) \text{ and } (H \leq 315) \text{ and } (R > 180) \text{ and } (B > 180) \text{ and } (G < 90)$
14	storage	$(H \geq 10) \text{ and } (H \leq 35) \text{ and } (R \geq 80) \text{ and } (R \leq 180) \text{ and } (G \geq 30) \text{ and } (G \leq 130) \text{ and } (B < 120) \text{ and } (\text{maxRGB} < 220)$
15	storage	$(H \geq 25) \text{ and } (H \leq 52) \text{ and } (R \geq 180) \text{ and } (G \geq 135) \text{ and } (G \leq 225) \text{ and } (B \geq 100) \text{ and } (B \leq 195) \text{ and } (\text{span} \geq 45) \text{ and } (\text{maxRGB} \geq 170)$

Order	Target	Predicate
16	study	(H >= 220) and (H <= 250) and (B >= 80) and (R < 100) and (G < 100) and (maxRGB < 190)
17	study	(H >= 205) and (H <= 250) and (B >= 80) and (R < 120) and (G < 130) and (maxRGB < 190)
18	room default	(maxRGB >= 185) and (minRGB >= 145) and (span >= 30) and (span <= 95)

Table B.8. Serialized native and auxiliary representation settings (all 11,534 records).

Operation	Saved setting
Native contour simplification / minimum area	1.2 px / 24 px squared
Rectangle eligibility	Area ratio >= 0.9; at most 6 approximated corners
Coordinate offset / short-edge length	0.5 / 2.0 px
Native orthogonal snap	1.5 px
Auxiliary room / construction simplification	0.6 / 4.0 px
Auxiliary expansion: room / construction / opening	1 / 1 / 1 px
Construction axis snap / gap close	5.0 / 1 px
Construction rectangle fill / outlier limit	0.72 / 0.08
Surface gap kernel / room-fragment area	9 px / 2048 px squared
Maximum linkage points per pair	4

Native objects retain exterior and hole coordinates; qualifying hole-free contours may use rectangle fitting, otherwise they use sparse polygon approximation and orthogonal/short-edge cleanup. Auxiliary rings follow class-specific masks and smoothing, so their group count can differ from native objects. Existing holes are not silently counted as filled area in native storage. Rendering order and masks are frozen with the saved artifacts. Some inspected code defaults, including an additional construction-polygon tolerance, were not serialized in historical records; their equivalence across all historical runs cannot be certified. This inventory therefore distinguishes recorded values from reconstruction assumptions.

C Detailed measured results

Table C.1. CubiCasa5K test: original and identically registered outputs.

Method / stage	Metric	Estimate [95% BCa CI]
SALI-FP / raw	oa	0.7830 [0.7757, 0.7899]
SALI-FP / raw	mean_pa	0.3001 [0.2903, 0.3123]
SALI-FP / raw	miou	0.2074 [0.2000, 0.2162]
SALI-FP / raw	biou	0.0570 [0.0530, 0.0623]
SALI-FP / raw	Visible-wall IoU	0.1116 [0.1013, 0.1245]
SALI-FP / raw	Wall clDice	0.1728 [0.1589, 0.1892]
SALI-FP / registered	oa	0.8657 [0.8574, 0.8733]
SALI-FP / registered	mean_pa	0.4797 [0.4639, 0.4951]
SALI-FP / registered	miou	0.3596 [0.3449, 0.3740]
SALI-FP / registered	biou	0.1858 [0.1756, 0.1961]
SALI-FP / registered	Visible-wall IoU	0.3325 [0.3105, 0.3549]
SALI-FP / registered	Wall clDice	0.5113 [0.4857, 0.5362]
CubiCasa5K / raw	oa	0.9517 [0.9456, 0.9566]
CubiCasa5K / raw	mean_pa	0.8230 [0.8122, 0.8313]
CubiCasa5K / raw	miou	0.7390 [0.7270, 0.7496]
CubiCasa5K / raw	biou	0.5546 [0.5444, 0.5643]
CubiCasa5K / raw	Visible-wall IoU	0.7482 [0.7344, 0.7603]
CubiCasa5K / raw	Wall clDice	0.8575 [0.8482, 0.8660]
CubiCasa5K / registered	oa	0.9468 [0.9405, 0.9517]
CubiCasa5K / registered	mean_pa	0.7996 [0.7885, 0.8085]
CubiCasa5K / registered	miou	0.7015 [0.6890, 0.7128]
CubiCasa5K / registered	biou	0.4947 [0.4842, 0.5047]
CubiCasa5K / registered	Visible-wall IoU	0.6972 [0.6820, 0.7107]
CubiCasa5K / registered	Wall clDice	0.8314 [0.8199, 0.8417]
MiT-UNet / raw	Visible-wall IoU	0.7721 [0.7435, 0.7843]
MiT-UNet / raw	Wall clDice	0.9302 [0.9219, 0.9372]
MiT-UNet / registered	Visible-wall IoU	0.7129 [0.6892, 0.7309]
MiT-UNet / registered	Wall clDice	0.8901 [0.8743, 0.9030]

Table C.2. ArchP10k partitions: internal consistency only.

Partition	Plans	Mean RCR [95% CI]	Micro RCR
full	11534	0.9569 [0.9565, 0.9573]	0.9595
development	9225	0.9571 [0.9566, 0.9575]	0.9597
validation	1157	0.9566 [0.9552, 0.9578]	0.9592
test	1152	0.9556 [0.9541, 0.9569]	0.9582
hard	400	0.9507 [0.9483, 0.9530]	0.9531
nonhard test	752	0.9582 [0.9565, 0.9596]	0.9612

Table C.3. Retained production call and stage records.

Quantity	Value	Interpretation
Logical calls / HTTP attempts	39,875 / 41,931	2,056 excess request attempts
Audit median [IQR]	39.3 [24.0, 62.5] s	Recorded remote stage
Conditional repair median [IQR]	164.8 [100.9, 235.0] s	Only triggered repairs
Cleanup median [IQR]	138.4 [93.8, 211.5] s	Recorded remote stage
Recorded subtotal median	260.8 s	Not full end-to-end time
Reference-rate total / mean	\$9,430.83 / \$0.818	Rate-card calculation, not billing
Reference-rate median [IQR]	\$0.82 [\$0.66, \$0.91]	Not a measured monetary saving

The cost calculation is retained solely as an explicitly labeled resource estimate derived from request records. It is not an invoice. Initial-generation and reused local-stage timestamps do not yield reliable full latency; aggregate wall-clock throughput is therefore omitted. No manual labor rate or editing-time saving is multiplied into a claimed return on investment.

Table C.4. Full-run complexity quartiles.

Quartile	Plans	Mean RCR	Protected (%)	Median points
1	2884	0.9607	15.46	651.0
2	2883	0.9578	18.38	827.0
3	2883	0.9561	19.11	999.0
4	2884	0.9529	22.68	1288.0

Table C.5. Full-run outcome denominators.

Quantity	Count
Structured outputs	11534
One repair	5273
No repair	6261
Protective status	2181
Suggested / accepted / rejected	11,481 / 8,033 / 3,448
RCR below 0.90	191
RCR below 0.95	3098

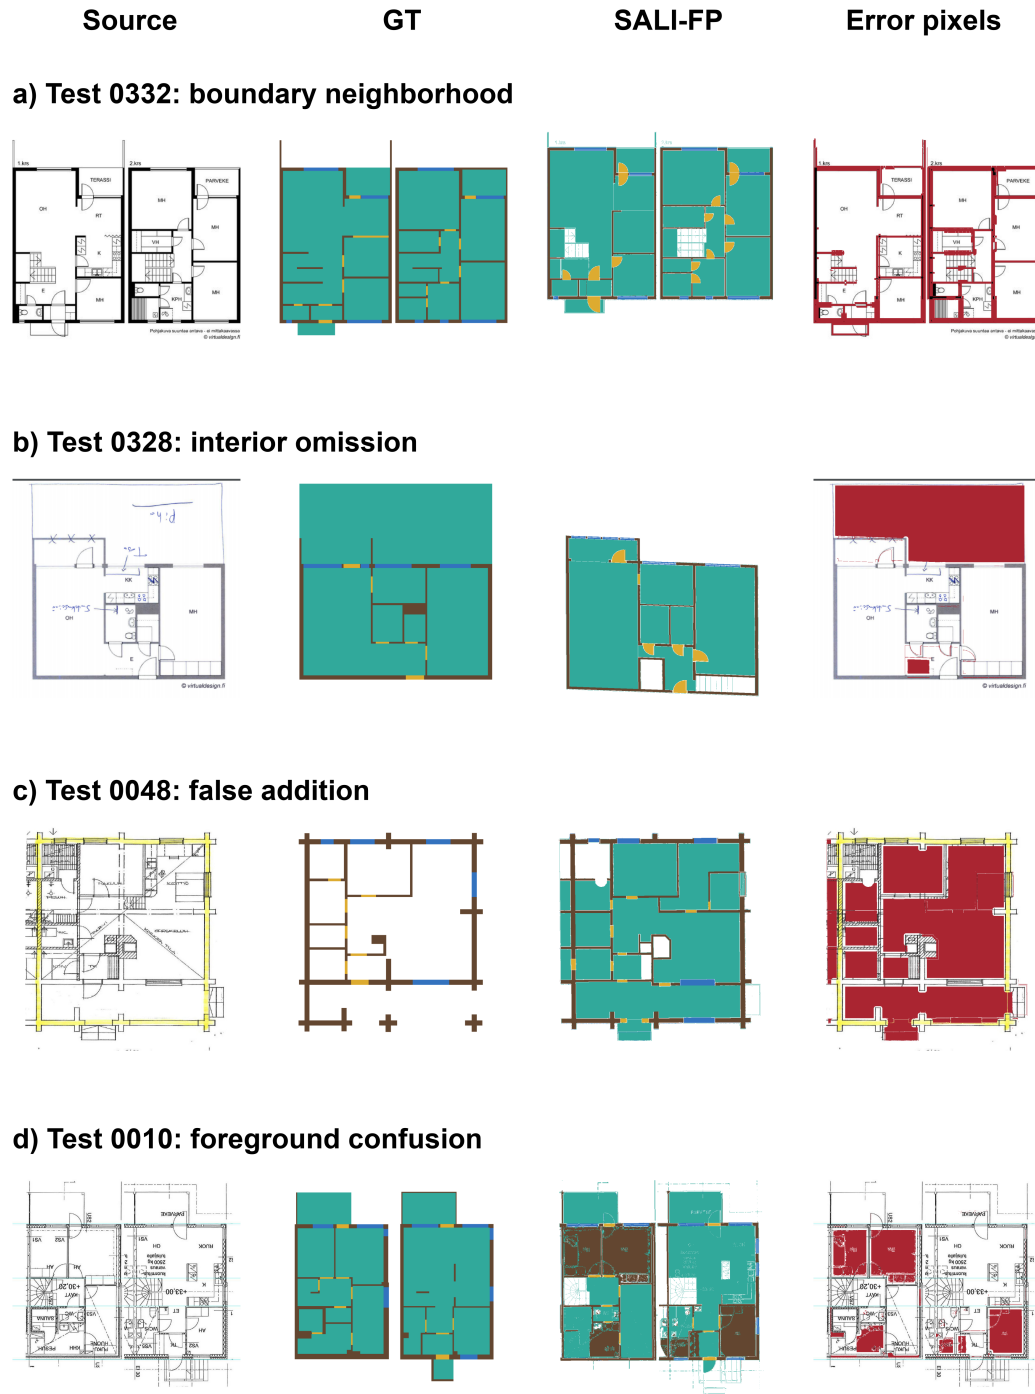


Fig. C.1: Systematic-error examples: source, GT, final SALI-FP, and selected error pixels. Each case maximizes one absolute error count. Test 0048 lacks Space references; its room-addition mask also reflects annotation scope (Table C.23).

SALI-FP

Tables C.6-C.8 and Fig. C.2 separate export behavior, tolerance-dependent boundary agreement, and class overlap. Raw supervised outputs must not be replaced by their lower-scoring registered variants when judging SALI-FP. The original examples in Fig. C.1 and Appendix F are unchanged.

Table C.6. Full ArchP10k local export audit; no additional model calls.

Quantity	Measured value
Exported plans	11534
Registration accepted	10981
Whole-plan geometry fallback	14
Objects receiving affine numerical repair	72
Plans with out-of-canvas coordinates	597
Mean / micro RCR, repaired geometry before registration	0.9290 / 0.9341
Mean / micro RCR, repaired geometry after registration	0.9284 / 0.9339
Local seconds per case, median [IQR]	0.908 [0.729, 1.173]
Additional API calls	0

Table C.7. Common-class boundary F1 across diagonal tolerances (400 plans).

Method / stage	0.25%	0.50%	1.00%
SALI-FP / raw	0.1174	0.2100	0.3271
SALI-FP / registered	0.3264	0.4962	0.6131
CubiCasa5K / raw	0.8300	0.8888	0.9127
CubiCasa5K / registered	0.7820	0.8821	0.9108

Table C.8. Pooled class overlap on the common four-class target.

Method / stage	Class	IoU	Dice
SALI-FP / raw	Boundary	0.1094	0.1972
SALI-FP / raw	Door/opening	0.0396	0.0762
SALI-FP / raw	Window	0.0520	0.0989
SALI-FP / raw	Room	0.6284	0.7718
SALI-FP / registered	Boundary	0.3180	0.4826
SALI-FP / registered	Door/opening	0.1454	0.2539
SALI-FP / registered	Window	0.2318	0.3763
SALI-FP / registered	Room	0.7433	0.8528
CubiCasa5K / raw	Boundary	0.7173	0.8354
CubiCasa5K / raw	Door/opening	0.6181	0.7640
CubiCasa5K / raw	Window	0.7199	0.8372
CubiCasa5K / raw	Room	0.9006	0.9477
CubiCasa5K / registered	Boundary	0.6697	0.8022
CubiCasa5K / registered	Door/opening	0.5720	0.7277
CubiCasa5K / registered	Window	0.6727	0.8043
CubiCasa5K / registered	Room	0.8917	0.9427

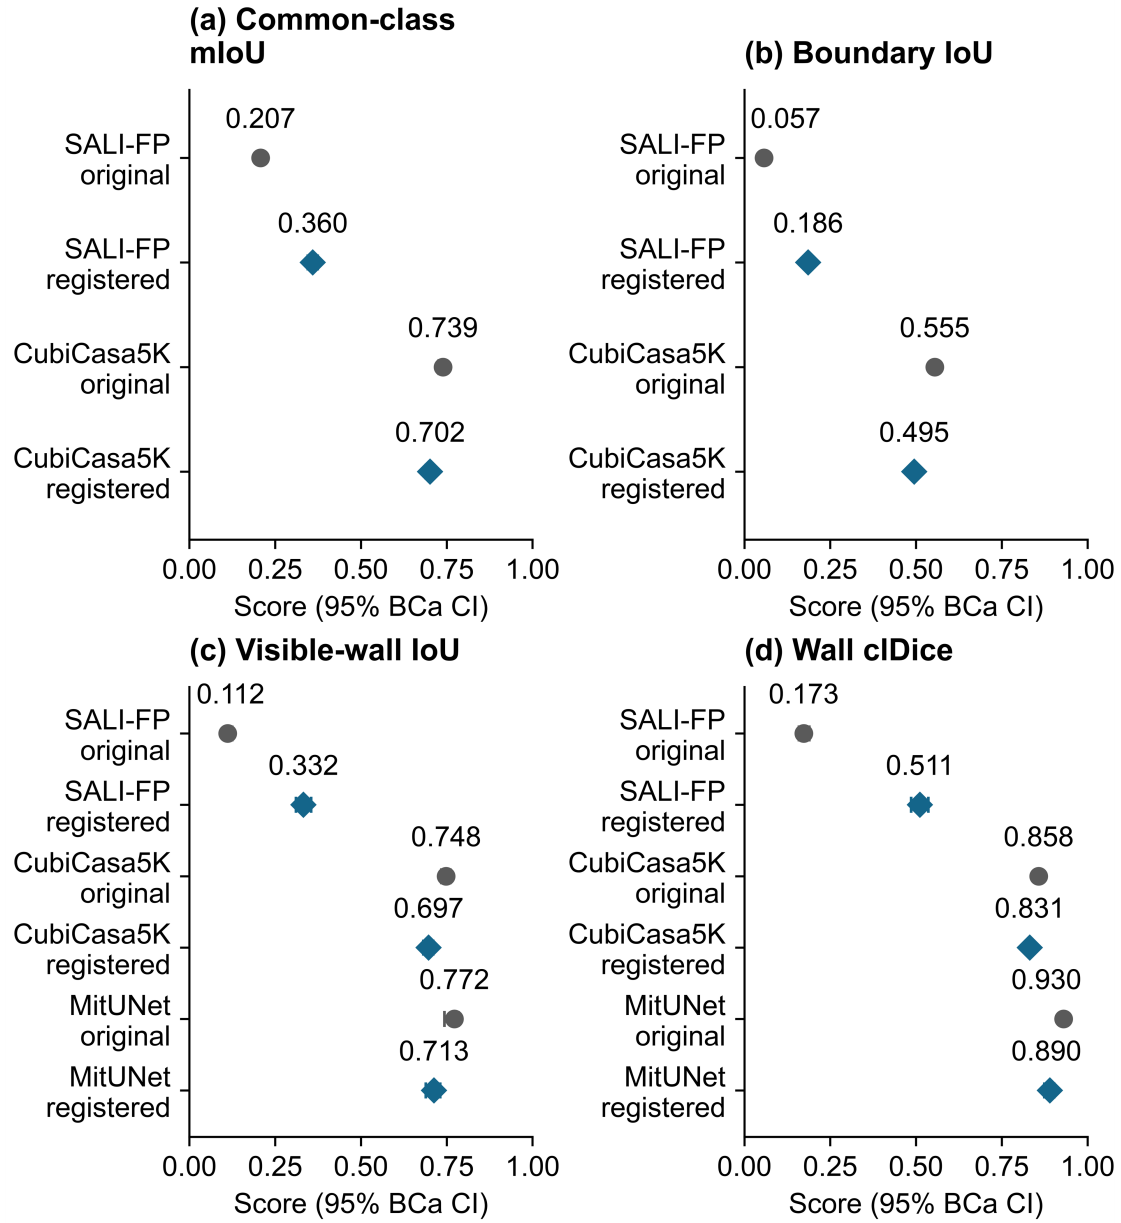


Fig. C.2: All-method sensitivity to identical source-only registration. Gray circles denote original outputs; blue diamonds denote registered outputs. Unmodified supervised predictions remain the primary baseline. MitUNet is included only for visible-wall metrics.

Tables C.9 and C.10 retain the wall-only comparison and all primary paired cost ratios. Reconstruction fidelity refers to each predicted mask; GT wall IoU retains the visible-wall domain of the accuracy protocol. The common-four-class vertex medians [IQR] are 3,641.0 [2,454.0, 5,616.5] for SALI-FP and 5,785.0 [4,525.5, 6,914.5] for CubiCasa5K; storage medians [IQR] are 79.0 [53.0, 122.2] and 91.0 [70.2, 109.4] KiB. At 0.95/0.995 fidelity the corresponding vertex medians are 3,602/3,641 and 5,660/5,785. All 400 cases satisfy each threshold; every zero-tolerance replay is exact. Per-class constraints often retain a lossless candidate to protect thin elements. This evaluation measures raster-derived representation economy, not equivalence of the methods' semantic correctness or native vector decoders.

Table C.9. Wall-target accuracy and prediction-referenced vector costs at 0.98 fidelity.

Method	GT wall IoU	Vertices [IQR]	KiB [IQR]	Achieved
SALI-FP	0.3325	644.0 [422.0, 967.0]	12.3 [7.7, 18.3]	400/400
CubiCasa5K	0.7482	2,912.0 [2,263.5, 3,574.5]	47.5 [37.5, 57.7]	400/400
MiT-UNet	0.7721	431.0 [309.5, 570.5]	6.5 [4.6, 8.8]	400/400

Table C.10. Matched median cost ratios: SALI-FP divided by each baseline.

Target	Baseline	Cost	Ratio [95% BCa CI]	Paired
common4	CubiCasa5K	vertices	0.639 [0.610, 0.678]	400/400
common4	CubiCasa5K	bytes	0.886 [0.824, 0.941]	400/400
wall	CubiCasa5K	vertices	0.217 [0.202, 0.232]	400/400
wall	CubiCasa5K	bytes	0.245 [0.233, 0.269]	400/400
wall	MiT-UNet	vertices	1.438 [1.353, 1.534]	400/400
wall	MiT-UNet	bytes	1.692 [1.599, 1.797]	400/400

Table C.11. Recorded paired stage changes; per-plan mean differences.

Group	Transition	Metric	Change [95% BCa CI]	Plans
all	protected_repair minus initial	plan-mean miou	-0.0088 [-0.0131, -0.0045]	400
all	protected_repair minus initial	plan-mean biou	-0.0032 [-0.0060, -0.0005]	400
all	cleanup minus protected_repair	plan-mean miou	0.0055 [0.0032, 0.0078]	400
all	cleanup minus protected_repair	plan-mean biou	-0.0040 [-0.0055, -0.0025]	400
all	final minus cleanup	plan-mean miou	0.1699 [0.1579, 0.1821]	400
all	final minus cleanup	plan-mean biou	0.1288 [0.1195, 0.1383]	400
repair_triggered	protected_repair minus initial	plan-mean miou	-0.0134 [-0.0201, -0.0069]	263
repair_triggered	protected_repair minus initial	plan-mean biou	-0.0049 [-0.0092, -0.0007]	263
repair_triggered	cleanup minus protected_repair	plan-mean miou	0.0062 [0.0039, 0.0087]	263
repair_triggered	cleanup minus protected_repair	plan-mean biou	-0.0048 [-0.0065, -0.0032]	263
repair_triggered	final minus cleanup	plan-mean miou	0.1567 [0.1421, 0.1713]	263

SALI-FP

Group	Transition	Metric	Change [95% BCa CI]	Plans
repair_triggered	final minus cleanup	plan-mean biou	0.1187 [0.1075, 0.1304]	263

Table C.12. Native geometry: F1 of mean precision and recall; overlap filter disabled.

Method	Metric	F1 [95% BCa CI]	Mean P / R	Mean plan F1
SALI-FP	Room	0.4450 [0.4221, 0.4683]	0.3647 / 0.5705	0.4271
SALI-FP	Corner	0.1590 [0.1494, 0.1690]	0.0973 / 0.4345	0.1559
SALI-FP	Angle	0.0932 [0.0863, 0.1002]	0.0573 / 0.2495	0.0916
CubiCasa5K / polygons	Room	0.6305 [0.6093, 0.6523]	0.6446 / 0.6170	0.6175
CubiCasa5K / polygons	Corner	0.3274 [0.3134, 0.3424]	0.2429 / 0.5020	0.3167
CubiCasa5K / polygons	Angle	0.2358 [0.2237, 0.2494]	0.1763 / 0.3563	0.2278
Raster2Seq	Room	0.7626 [0.7455, 0.7787]	0.7504 / 0.7752	0.7531
Raster2Seq	Corner	0.5458 [0.5297, 0.5610]	0.5000 / 0.6008	0.5373
Raster2Seq	Angle	0.3681 [0.3549, 0.3809]	0.3366 / 0.4062	0.3626

Table C.13. Fixed-tolerance GT accuracy and shared-decoder control-point costs.

Method	Tolerance (px)	GT mIoU [95% BCa CI]	Median vertices	Completed
sali_fp	0	0.3596 [0.3449, 0.3740]	3,869.0	400/400
sali_fp	0.25	0.3596 [0.3449, 0.3740]	3,869.0	400/400
sali_fp	0.5	0.3596 [0.3449, 0.3740]	3,641.0	400/400
sali_fp	1	0.3613 [0.3464, 0.3757]	1,916.5	400/400
sali_fp	2	0.3612 [0.3463, 0.3756]	1,734.0	400/400
sali_fp	4	0.3609 [0.3461, 0.3753]	1,675.0	400/400
sali_fp	8	0.3559 [0.3415, 0.3702]	1,618.5	400/400
cubicasa5k	0	0.7390 [0.7270, 0.7496]	6,268.0	400/400
cubicasa5k	0.25	0.7390 [0.7270, 0.7496]	6,268.0	400/400
cubicasa5k	0.5	0.7390 [0.7270, 0.7496]	5,785.0	400/400
cubicasa5k	1	0.7384 [0.7264, 0.7489]	1,725.0	400/400
cubicasa5k	2	0.7327 [0.7210, 0.7433]	1,172.5	400/400

SALI-FP

Method	Tolerance (px)	GT mIoU [95% BCa CI]	Median vertices	Completed
cubicasa5k	4	0.7105 [0.6990, 0.7206]	884.0	400/400
cubicasa5k	8	0.6674 [0.6564, 0.6773]	792.0	400/400
cubicasa_polygon	0	0.6612 [0.6429, 0.6773]	246.0	395/400
cubicasa_polygon	0.25	0.6612 [0.6429, 0.6773]	246.0	395/400
cubicasa_polygon	0.5	0.6612 [0.6429, 0.6773]	246.0	395/400
cubicasa_polygon	1	0.6612 [0.6429, 0.6773]	229.0	395/400
cubicasa_polygon	2	0.6611 [0.6428, 0.6772]	222.0	395/400
cubicasa_polygon	4	0.6607 [0.6424, 0.6768]	210.0	395/400
cubicasa_polygon	8	0.6440 [0.6262, 0.6598]	187.0	395/400

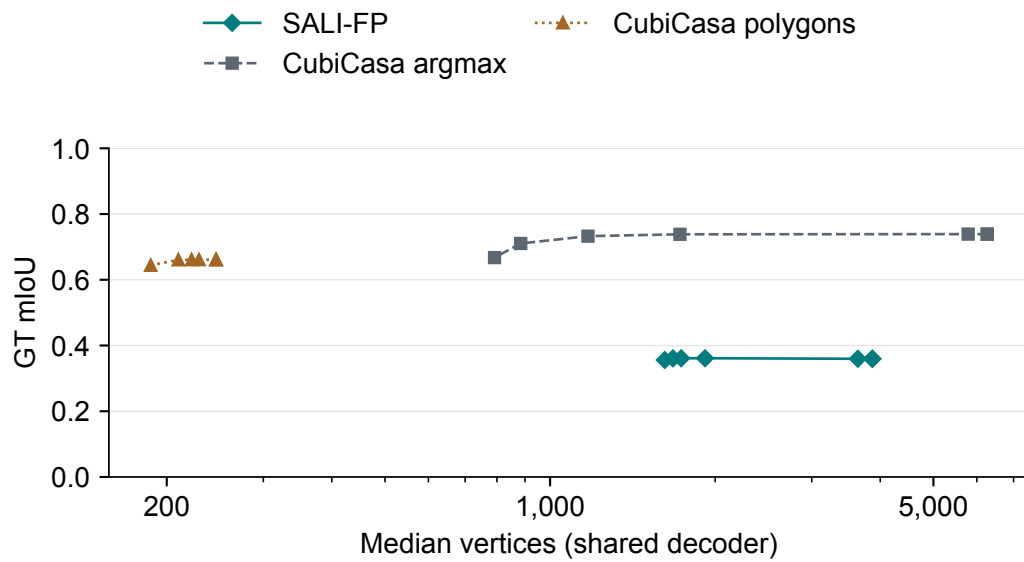


Fig. C.3: GT accuracy versus shared-decoder control-point cost at the seven fixed simplification tolerances in Table C.13. Every setting is applied to all test plans; no per-plan selection uses GT. Markers denote the frozen tolerance settings.

Table C.14. Additional production, stage, and decision audit.

Observation	Result	Scope
Plans with extra HTTP attempts	1,591 / 11,534	Per-case request counters
Additional HTTP attempts / maximum per plan	2,056 / 6	Not extra logical repairs
Repair-triggered / skipped public plans	263 / 137	Same 400 test plans
Already-target threshold 0.56	350 / 3760	One nonconstruction predicate only
Already-target threshold 0.7	200 / 3760	One nonconstruction predicate only
Already-target threshold 0.84	64 / 3760	One nonconstruction predicate only
Independent plan tasks / proposal tasks	200 / 400	No completed human scores
Accepted source-only affine transforms	356/400	Not GT displacement estimates
Absolute horizontal translation (px)	13.061 [3.095, 36.444]	Median [IQR], all 400 plans
Absolute vertical translation (px)	57.132 [18.054, 106.558]	Median [IQR], all 400 plans
Minimum affine scale	0.934 [0.873, 0.976]	Median [IQR], all 400 plans
Maximum affine scale	0.984 [0.946, 1.000]	Median [IQR], all 400 plans

Native room scores in Table C.12 use 398 SVGs containing room references; cubi-casa5k_test_0048 and cubi-casa5k_test_0219 have no Space polygons. They remain in all pixel and inference records. Method failures retain the eligible reference denominator. Angle F1 follows the official angle criterion and is not an edge score. Shared raster-component contours are not substituted for native SALI-FP sparse room objects.

The fixed-tolerance curve reports each configuration on every plan, including failed polygon decodes as empty raster predictions. Vertex medians refer to completed representations; completed counts are shown rather than assigning failures zero storage. Gate replay changes one predicate on retained statistics and does not regenerate repair outputs or measure edit correctness.

Table C.15. Native room costs and common overlap-filter sensitivity.

Method	Completed	Cost n	Vertices [IQR]	KiB [IQR]	Filtered room F1
SALI-FP	400/400	398	294 [199, 431]	5.219 [3.596, 7.622]	0.4443
CubiCasa5K / polygons	395/400	393	132 [92, 188]	2.266 [1.619, 3.136]	0.6273
Raster2Seq	400/400	398	70 [52, 103.75]	1.457 [1.075, 2.086]	0.7018

Native costs retain exterior and hole vertices without a repeated closing point. Compact UTF-8 JSON uses common fields, room class, 1024-canvas coordinates, and two decimal places. Cost summaries exclude failed inference and absent room GT, with their counts explicit; accuracy keeps failed predictions as zero. All three methods use the same primary and sensitivity overlap switches.

Table C.16. Stages under one frozen final source-only transform.

Subset	n	Stage	Pooled mIoU [95% BCa CI]	BIoU
all	400	initial	0.2763 [0.2653, 0.2885]	0.1152
all	400	protected repair	0.3159 [0.3028, 0.3295]	0.1515
all	400	cleanup	0.3596 [0.3449, 0.3740]	0.1858
repair triggered	263	initial	0.2410 [0.2315, 0.2519]	0.0849
repair triggered	263	protected repair	0.2984 [0.2833, 0.3144]	0.1402
repair triggered	263	cleanup	0.3384 [0.3213, 0.3553]	0.1708
repair skipped	137	initial	0.3521 [0.3270, 0.3774]	0.1734
repair skipped	137	protected repair	0.3521 [0.3270, 0.3774]	0.1734
repair skipped	137	cleanup	0.4040 [0.3769, 0.4297]	0.2146

The repair-triggered fixed-frame mean per-plan mIoU change is 0.0702 [0.0574, 0.0842]. These plan-mean contrasts and pooled mIoU differences use different aggregation; all per-metric paired intervals are retained in the evidence table. The original-coordinate contrasts remain in Table C.11. No stage-specific refitting or GT-derived selection is used.

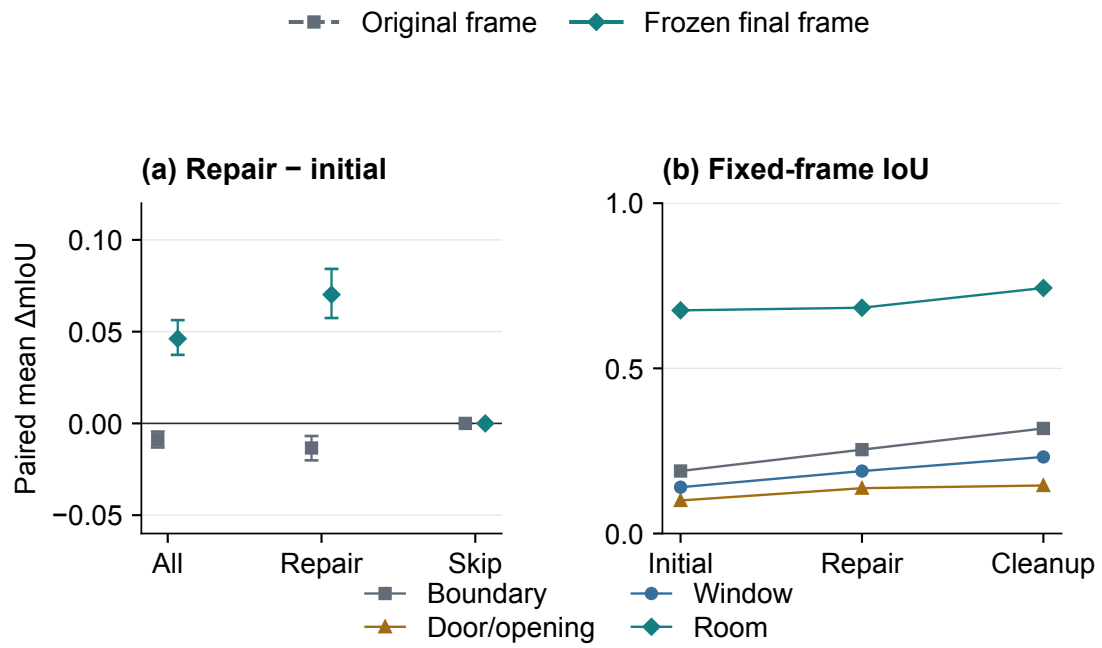


Fig. C.4: Stage-detail audit: (a) paired plan-mean repair-minus-initial mIoU differences with 95% BCa intervals; (b) class IoU under the frozen final transform. Repair-skipped images are identical before cleanup. Frame-conditioned results and group counts are in Table C.16.

SALI-FP

Table C.17. Exclusive pixel errors; parentheses are percentages of all errors.

Method	Band	Errors	Boundary	Omitted	Added	Confused
SALI-FP	0.25%	56,350,103	19,719,198 (34.99%)	12,199,963 (21.65%)	17,045,832 (30.25%)	7,385,110 (13.11%)
SALI-FP	0.5%	56,350,103	25,050,419 (44.45%)	10,094,113 (17.91%)	16,115,423 (28.60%)	5,090,148 (9.03%)
SALI-FP	1%	56,350,103	31,796,315 (56.43%)	7,180,240 (12.74%)	14,375,243 (25.51%)	2,998,305 (5.32%)
CubiCasa5K / argmax	0.25%	20,259,975	7,341,614 (36.24%)	4,223,581 (20.85%)	7,850,721 (38.75%)	844,059 (4.17%)
CubiCasa5K / argmax	0.5%	20,259,975	8,266,735 (40.80%)	3,842,951 (18.97%)	7,608,690 (37.56%)	541,599 (2.67%)
CubiCasa5K / argmax	1%	20,259,975	9,604,690 (47.41%)	3,222,779 (15.91%)	7,140,895 (35.25%)	291,611 (1.44%)
CubiCasa5K / polygons	0.25%	28,911,667	10,312,167 (35.67%)	9,579,585 (33.13%)	7,206,143 (24.92%)	1,813,772 (6.27%)
CubiCasa5K / polygons	0.5%	28,911,667	12,545,367 (43.39%)	8,440,341 (29.19%)	6,912,552 (23.91%)	1,013,407 (3.51%)
CubiCasa5K / polygons	1%	28,911,667	15,533,958 (53.73%)	6,659,522 (23.03%)	6,370,200 (22.03%)	347,987 (1.20%)

Every method retains 419,430,400 pixels (400 square 1024-pixel canvases). The hierarchy assigns each wrong pixel first to the GT-boundary neighborhood, otherwise to foreground-to-background omission, background-to-foreground addition, or foreground-class confusion. The band is the rounded diagonal fraction around both sides of adjacent GT-label changes. Five-class pooled and GT-row-normalized confusion matrices, per-class decomposition, and failed-case records accompany the table.

Table C.18. Exclusive geometric causes before and after delivery.

Geometric cause	Original objects	Delivered objects
empty	7765	7765
hole or ring structure	4	0
malformed	6	6
other invalid	90	11
self intersection	101478	22935
valid	673880	752510
zero area or collapsed	76	72

Classification prioritizes malformed, empty, nonfinite, zero-area/collapsed, valid, self-intersection, hole/ring-structure, too-few-point, and other-invalid conditions. The raw GEOS reason remains attached to each object. Repair dispositions in Table B.1 are independent processing outcomes; neither is inferred from the other. Residual IDs are excluded from automatic solid construction pending review.

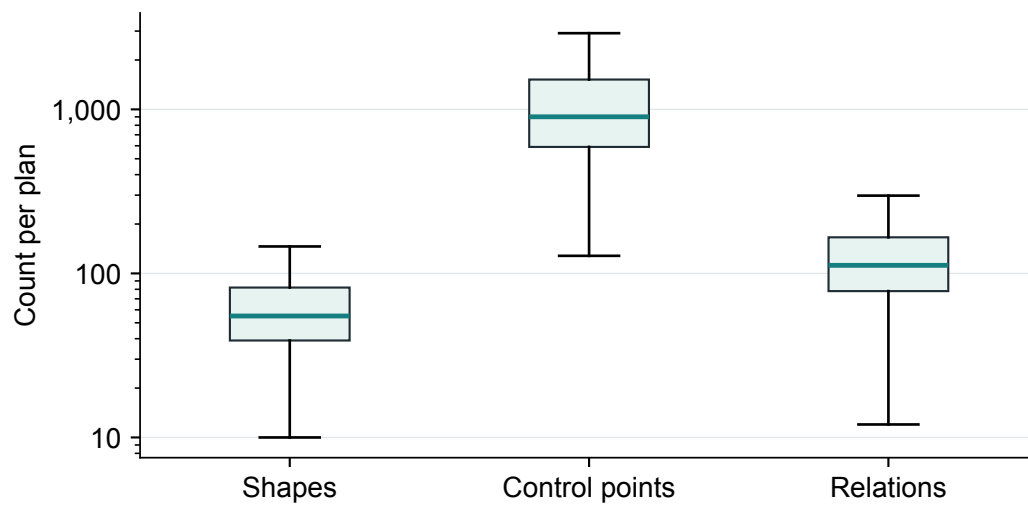


Fig. C.5: ArchP10k representation sizes per plan. Boxes span the interquartile range, center lines mark medians, and whiskers extend to the furthest observations within 1.5 IQR. Outliers are omitted only from this display; all plans remain in the statistics. The count axis is logarithmic; related export statistics are in Table C.6.

Table C.19. Retained local baseline timers; seconds per attempted plan.

Local method	n	Median (s)	IQR (s)
CubiCasa5K / argmax	400	0.380	0.368–0.388
CubiCasa5K / polygons	400	6.804	6.589–7.301
MiT-UNet	400	0.050	0.049–0.052
Raster2Seq	400	1.153	0.866–1.728

Timers exclude model loading and include each retained per-case inference/export routine; polygon timers additionally include official postprocessing. Apple Silicon local CPU/MPS execution is distinct from the unobservable remote image/audit accelerator. These entries are not end-to-end deployment benchmarks. No baseline monetary bill or unmeasured SALI-FP stage is imputed; remote-stage records and reference-price estimates remain in Table C.3.

Table C.20. Delivered geometric causes by semantic class.

Class	Objects	Self-cross	Empty	Other invalid	Invalid share
balcony	15,524	296	160	1	2.94%
bathroom	32,109	261	11	0	0.85%
bedroom	49,056	2,839	1,582	12	9.04%
corridor	22,345	2,044	779	8	12.67%
door	160,745	216	148	1	0.23%
elevator	10,389	104	63	0	1.61%
entrance	5,528	83	10	0	1.68%
kitchen	15,098	130	100	0	1.52%
living room	18,960	306	31	1	1.78%
room default	87,979	8,385	1,659	23	11.44%
stair	34,671	707	167	3	2.53%
storage	7,053	264	30	5	4.24%
study	4,565	1,011	138	11	25.41%
wall	177,097	3,059	577	7	2.06%
window	142,180	3,230	2,310	17	3.91%

Table C.21. Building categories with the most residual invalid objects; remainder pooled.

Source category	Objects	Self-cross	Empty	Other invalid	Invalid share
residential other	440,079	13,684	4,867	47	4.23%
office	51,837	1,417	446	7	3.61%
interior general	38,446	1,218	429	7	4.30%
hotel	38,203	1,317	308	7	4.27%
education	52,371	1,200	317	5	2.91%
cultural other	45,099	966	387	6	3.01%
mixed use	25,715	724	220	3	3.68%
restaurant bar	14,085	450	131	1	4.13%
all remaining categories	77,464	1,959	660	6	3.39%

Tables C.20–C.21 retain every object. Other-invalid counts combine zero-area, nonfinite, malformed, hole/ring and other GEOS causes. The pooled remainder is not excluded; the full building-category cross-tabulation remains in the evidence files.

Table C.22. Door/window error locations; percentages of the respective GT-class pixels.

Method	GT class	GT pixels	Boundary error	Interior omitted	Interior confused
SALI-FP	Door/opening	2,162,846	65.99%	1.38%	4.23%
SALI-FP	Window	4,708,442	55.19%	4.48%	7.66%
CubiCasa5K / argmax	Door/opening	2,162,846	29.63%	0.08%	1.68%
CubiCasa5K / argmax	Window	4,708,442	18.84%	0.17%	1.37%
CubiCasa5K / polygons	Door/opening	2,162,846	30.62%	0.70%	2.44%
CubiCasa5K / polygons	Window	4,708,442	25.18%	2.70%	4.10%

Correct pixels occupy the remaining GT support. Background-to-foreground additions are tabulated in Table C.17, not assigned to an invented door/window GT instance. Spatial error categories do not identify a unique generative cause.

Table C.23. Reference-scope sensitivity; the primary evaluation retains all 400 plans.

Scope	Plans	Method	mIoU	Added pixels
complete test	400	SALI-FP	0.3596	16,115,423
complete test	400	CubiCasa5K / argmax	0.7390	7,608,690
complete test	400	CubiCasa5K / polygons	0.6612	6,912,552
nonempty room reference	398	SALI-FP	0.3603	15,362,301
nonempty room reference	398	CubiCasa5K / argmax	0.7409	6,804,133
nonempty room reference	398	CubiCasa5K / polygons	0.6628	6,081,348

Test 0048 and Test 0219 have no SVG Space references. The apparent room additions in Test 0048 therefore expose annotation scope as well as prediction disagreement; they are not verified hallucinations. Table C.23 separately pools the 398 nonempty-room references without changing the official 400-case primary denominator.

Table C.24. Public-test benchmark calibration and native room geometry.

Method	Four-class mIoU [95% BCa CI]	Room F1	Corner F1	Angle F1
SALI-FP	0.3596 [0.3449, 0.3740]	0.445	0.159	0.093
CubiCasa5K / argmax	0.7390 [0.7270, 0.7496]	N/A	N/A	N/A
CubiCasa5K / polygons	0.6612 [0.6422, 0.6766]	0.630	0.327	0.236
Raster2Seq	N/A	0.763	0.546	0.368

Pixel calibration uses all 400 test plans; native room geometry uses the 398 plans with SVG room references. Native polygon methods and raster argmax are distinguished explicitly. Raster2Seq has no directly comparable four-class mask in this evaluation, and MiT-UNet remains in the wall-only calibration (Table C.9). These values establish strict annotation-aligned calibration; they do

not substitute for the structured-output and matched visual evidence reported in the main text and Appendix F.


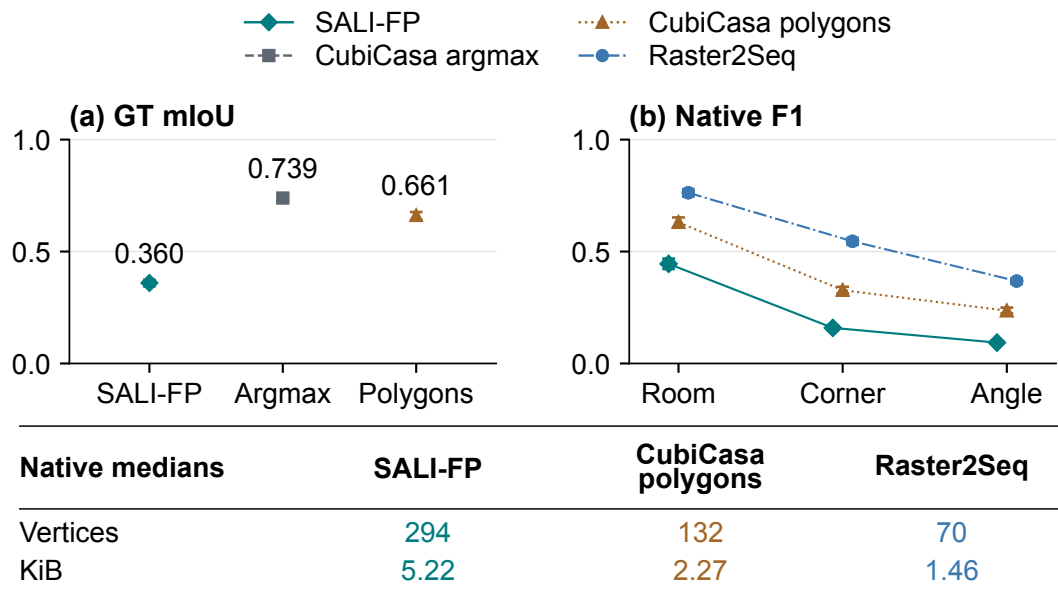


Fig. C.6: CubiCasa5K benchmark calibration: (a) GT mIoU; (b) native room, corner, and angle F1 with 95% BCa intervals. The lower band reports native room medians; IQRs are in Table C.15. Fixed-tolerance curves are in Fig. C.3.

Table C.25. Recorded SALI-FP stages on the same 400 public test plans.

Stage	mIoU [95% BCa CI]	BIoU	Boundary F1
Initial S_0	0.2099 [0.2024, 0.2193]	0.0642	0.2358
Protected S_1	0.2015 [0.1942, 0.2101]	0.0610	0.2260
Cleanup labels	0.2074 [0.2000, 0.2162]	0.0570	0.2100
Final representation	0.3596 [0.3449, 0.3740]	0.1858	0.4962

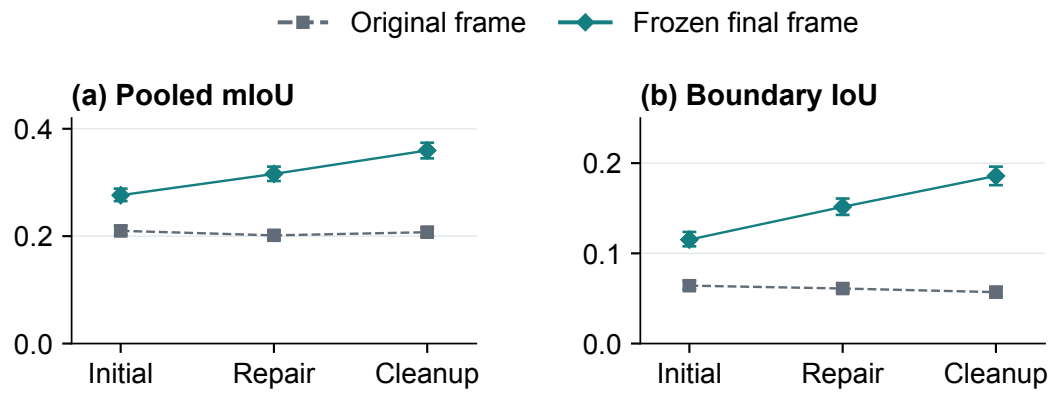

Paired plan-mean Δ mIoU: repair – initial

	All (400)	Repair (263)	Skip (137)
Original frame	-0.0088	-0.0134	0.0000
Frozen final frame	+0.0461	+0.0702	0.0000

Fig. C.7: Recorded stages in original and frozen final coordinates: pooled mIoU and boundary IoU with 95% BCa intervals. The band reports plan-mean repair-minus-initial differences; complete paired intervals and class trajectories are in Fig. C.4.

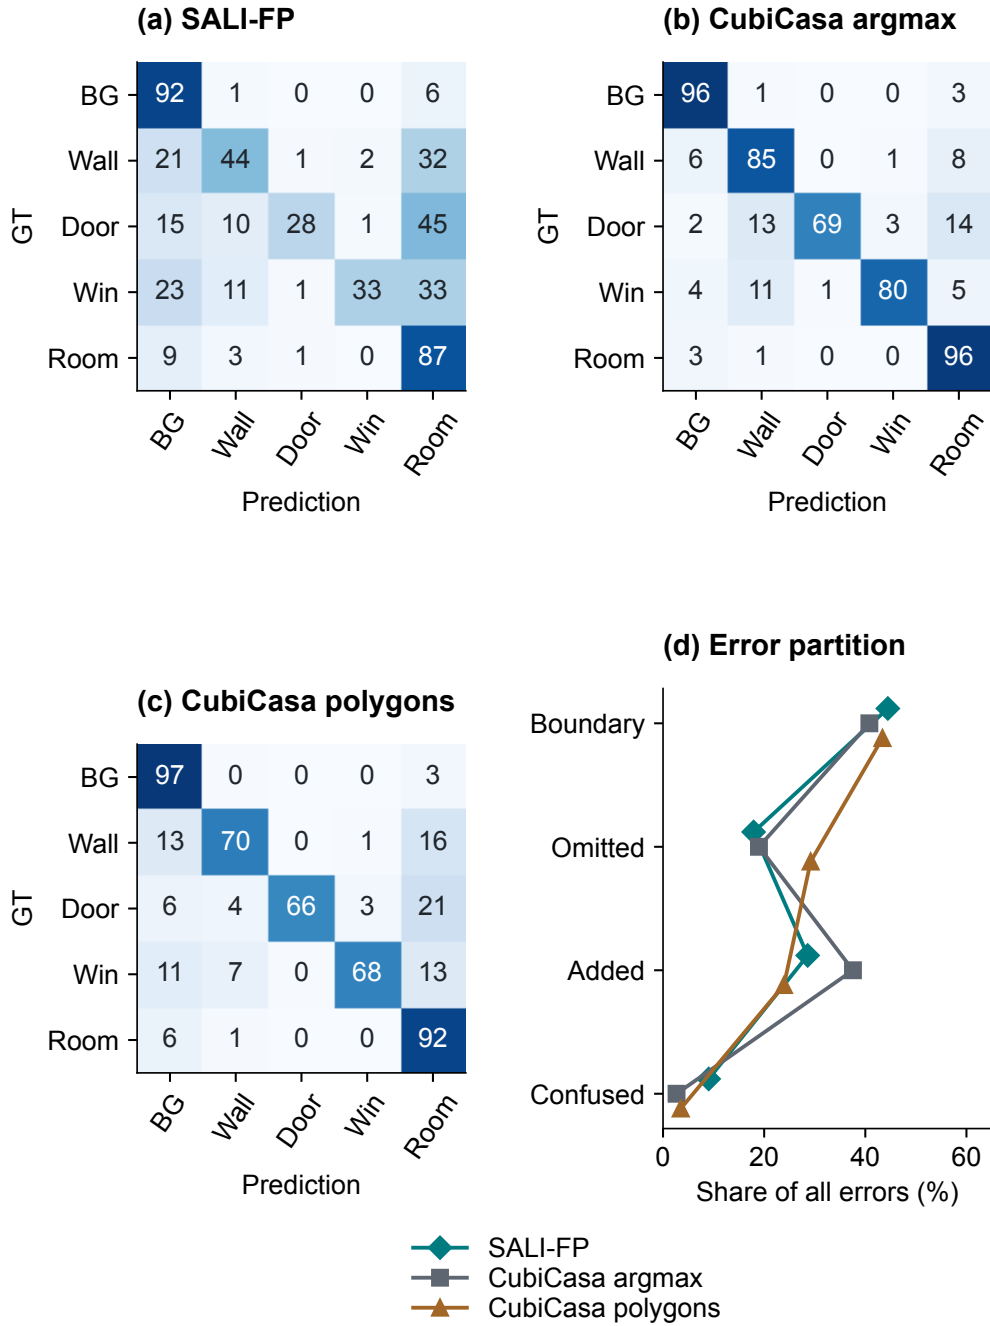


Fig. C.8: Systematic pixel-error diagnostics: SALI-FP, CubiCasa5K argmax, and CubiCasa5K polygons, with GT-row-normalized confusion and the disjoint 0.5%-diagonal error decomposition.

D Complexity definition

The frozen complexity score averages five standardized image factors: ink fraction, edge density, log connected-component count, orientation entropy, and non-orthogonal edge fraction. Eq. (D.1) describes this operational score. Standardization and hard-subset selection use the frozen registry, not SALI-FP errors or baseline outputs. The test hard subset contains its 400 highest-ranked plans. Complexity is a visual proxy, not an annotation of architectural difficulty. No PCA or factor-ablation sensitivity result is reported.

$$C_i = \frac{1}{5} \sum_{k=1}^5 \frac{x_{ik} - \mu_k}{\sigma_k}. \quad (\text{D.1})$$

Table D.1. Project-cluster Spearman associations; 10,000 BCa resamples.

Factor	Representation	rho [95% CI]	Holm p
ink ratio	auxiliary rcr	0.072 [0.050, 0.094]	0.0012
ink ratio	delivered rcr	0.030 [0.009, 0.051]	0.0141
edge density	auxiliary rcr	-0.093 [-0.114, -0.071]	0.0012
edge density	delivered rcr	-0.101 [-0.120, -0.080]	0.0012
component count	auxiliary rcr	0.004 [-0.018, 0.027]	1.0000
component count	delivered rcr	0.002 [-0.019, 0.023]	1.0000
orientation entropy	auxiliary rcr	-0.243 [-0.263, -0.223]	0.0012
orientation entropy	delivered rcr	-0.186 [-0.205, -0.166]	0.0012
nonorthogonal ratio	auxiliary rcr	-0.234 [-0.254, -0.212]	0.0012
nonorthogonal ratio	delivered rcr	-0.178 [-0.198, -0.158]	0.0012
complexity score	auxiliary rcr	-0.169 [-0.189, -0.147]	0.0012
complexity score	delivered rcr	-0.142 [-0.162, -0.122]	0.0012

Table D.2. Hard (400) minus non-hard test (752), clustered by 730 projects.

Outcome	Hard mean	Non-hard mean	Difference [95% CI]	Holm p
auxiliary rcr	0.9507	0.9582	-0.0075 [-0.0102, -0.0047]	0.0003
delivered rcr	0.9133	0.9324	-0.0191 [-0.0269, -0.0120]	0.0003
protected	0.2275	0.1729	0.0546 [0.0043, 0.1099]	0.0436

Factor intervals resample 7379 projects with replacement and use leave-one-project-out BCa acceleration. Weighted midranks reproduce duplicated observations. Two-sided centered bootstrap tests use a plus-one correction and Holm adjustment over twelve factor-by-representation tests; hard contrasts form a separate three-test family. Component count has the same ranks as its log transform. These associations do not validate complexity against human difficulty judgments.

E Availability and reproducibility inventory

Table E.1. Official resource status rechecked on 2026-09-07.

Resource	Located material	Use in this study
CubiCasa5K [2]	Official images, SVG labels, code, trained checkpoint	400 GT reruns; full-channel polygon rerun; 30 retained illustrations
MiT-UNet [25]	Official code, trained weights, regional-data link	400 visible-wall tests; 30 illustrations
Raster2Seq [27]	Official code and checkpoint	400 CPU native-polygon inferences; room evaluation on 398 reference cases
FloorPlanFormer [28]	Training code; validation/test links	No official inference checkpoint located
R2V / R3D [3, 5]	Code and test lists; incomplete authorized original inputs	No SALI-FP benchmark values
MLStructFP [9]	Official dataset documentation and request process	Not downloaded as an unrestricted mirror

The evidence inventory identifies code commits, checkpoint SHA-256 values, input hashes, mapping rules, dependency versions, and per-case predictions for the reruns. A weight file used for human-pose initialization is not interchangeable with the trained CubiCasa5K floor-plan checkpoint. Runtime adapters preserve architecture and weights; their fixed-canvas and device differences are disclosed rather than described as exact replication of published timing.

Table E.2. Unfinished validation and acceptance criteria.

Item	Prepared material	Required completion
ArchP10k accuracy	200 category/complexity-stratified plans; two blank annotation templates	Independent annotations, adjudication, frozen GT metrics
Gate correctness	200 accepted and 200 rejected proposals, blinded	Independent correctness scores; weighted estimates and agreement
Causal stage ablation	Recorded-stage paired evaluation	Controlled reruns holding models, prompts, and inputs fixed
Pretraining-exposure diagnostics	Exposure is not auditable from deployment aliases	Frozen near-duplicate and memorization probes with control images; no absence-of-contamination claim
Open-weight substitution	Interface and label protocol	Frozen image/VL weights; matched-subset inference and GT evaluation
Independent repeatability	Case and prompt identifiers	Multiple uncached model runs; variance and output-identity audit
Rhino operator study	Interface examples	Source-linked scale/height, randomized paired operators, timing logs
Public release	Private source and rights registry	Permission and privacy audit; approved license and release archive
Author disclosures	Names, order, equal contribution, affiliation, and corresponding contact confirmed	CRedit, funding, conflicts, and final author approval remain to be confirmed

The 200-plan sample uses proportional category-by-complexity allocation with seed 20260907 and prioritizes unique projects. Predictive quality does not enter selection. Images and two empty label templates are supplied independently from predictions. The 400-proposal package hides acceptance labels; private answer keys retain the population weighting. Human annotation, adjudication, and proposal correctness remain incomplete (Table E.2).

F Selected complex-plan illustrations

We examine 30 purpose-selected complex plans with successful SALI-FP outputs and high internal RCR. This subset supports detailed visual comparison rather than a representative estimate of accuracy. CubiCasa5K and MiT-UNet use the official checkpoints described in Section 4.2. Each page compares the source with the three methods on a common canvas. SALI-FP is shown at the semantic-output stage, without subsequent registration or geometry repair.

The common display distinguishes structural boundaries, doors/openings, windows and spaces. MiT-UNet predicts walls only; its blank non-wall areas are not room or opening errors. The two detail regions, R1 and R2, use identical coordinates and magnification across all methods. They are selected to explain visible differences, not to estimate overall accuracy. Case-specific observations describe source-visible structure, advantages and residual errors; prediction-derived reference masks and omission counts are not used.

The compact output record reports internal RCR, shape and control-point counts, and the number of invalid polygons in the original sparse representation, before geometry repair. These are SALI-FP output properties rather than cross-method accuracy scores. Corresponding inverse-rendering and internal-disagreement images are included in the reproducibility materials.



Overall comparison

SALI-FP retains the oblique upper room and the lower room group as a coherent layout. CubiCasa5K leaves most of the upper room unfilled and thickens several interior boundaries; MitUNet retains parts of the envelope but loses partition continuity. SALI-FP still omits the small upper-room enclosure and leaves a thin exterior trace.

Region R1

In the large upper-right room, SALI-FP provides continuous spatial coverage and distinct facade segments. CubiCasa5K instead produces a largely blank interior with ragged boundary fragments. The advantage is room-scale coverage, not recovery of every fixture or internal enclosure.

Region R2

At the junction of the lower-right room and the central passage, SALI-FP retains a connected divider and an opening label. CubiCasa5K merges much of this small-room arrangement, while MitUNet leaves disconnected wall ends around the same junction.

SALI-FP output record

Internal RCR	0.9747
Shapes / control points	41 / 927
Invalid sparse polygons	2

Fig. F.1. archp10k_000633: oblique room coverage and internal partitions.



Overall comparison

The two end blocks are more cleanly bounded in SALI-FP than in CubiCasa5K, whose perimeter contains thickened and scattered fragments. MitUNet preserves several heavy wall segments but incompletely connects the blocks. The central courtyard remains a major qualification: SALI-FP fills much of this open region and cannot be judged better there.

Region R1

Along the recessed upper facade, SALI-FP distinguishes narrow window segments between solid projections. CubiCasa5K blurs these recesses into thicker boundary patches. MitUNet records the solid projections but leaves the intervening facade connections incomplete in its wall-only output.


Region R2

The lower service block has a sharper partition and a more distinct opening segment in SALI-FP. CubiCasa5K produces a broad, noisy base and less distinct connections to the side passage. The shared view also exposes residual alignment differences near the lower facade.

SALI-FP output record

Internal RCR	0.9722
Shapes / control points	47 / 712
Invalid sparse polygons	7

Fig. F.2. archp10k_000690: facade openings around a courtyard plan.

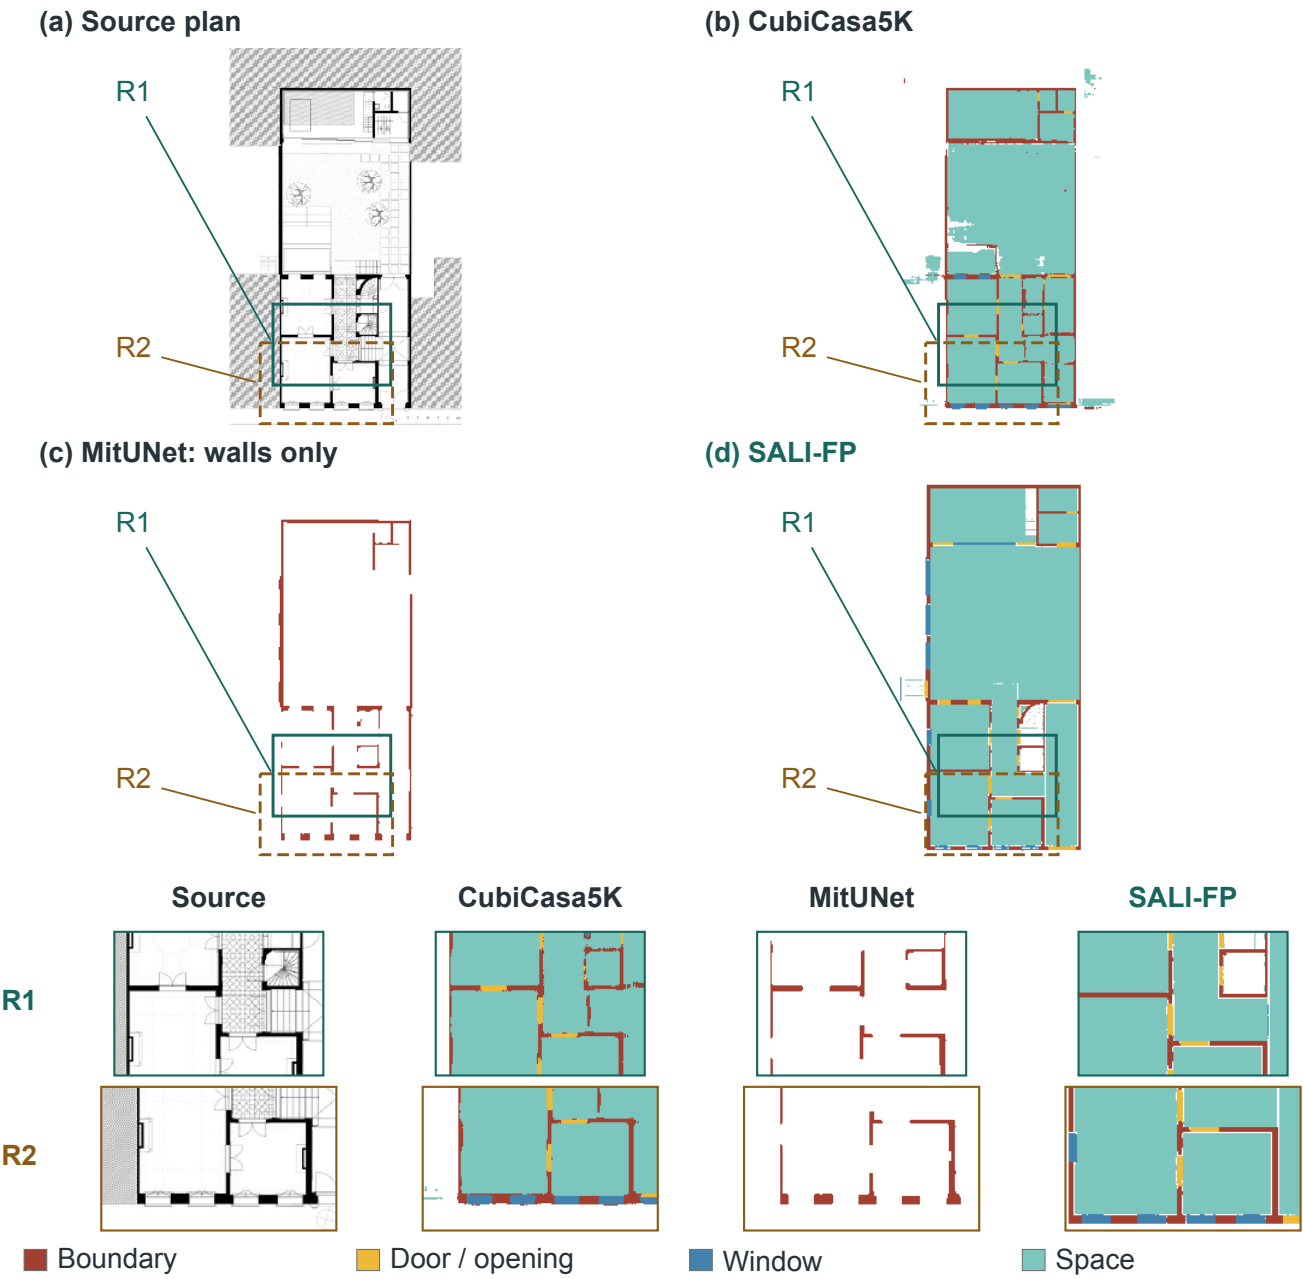

Overall comparison

SALI-FP produces cleaner room regions than CubiCasa5K and retains more connected lower partitions than MitUNet. However, its footprint is vertically expanded relative to the source, so this case supports a representational advantage rather than better registration. The large middle courtyard is filled in both semantic outputs, limiting conclusions about functional interpretation.

Region R1

Around the lower stair and circulation core, SALI-FP retains a compact connected partition arrangement. CubiCasa5K fills or merges small internal areas, and MitUNet leaves several wall ends detached. Their relative positions differ, which remains visible because no method-specific alignment is applied.


Region R2

At the lower facade, SALI-FP shows distinct boundary and opening segments instead of the exterior speckles visible in CubiCasa5K. The room outlines remain simplified, and their displacement from the original bottom rooms prevents interpreting this cleaner appearance as a positional accuracy gain.

SALI-FP output record

Internal RCR	0.9702
Shapes / control points	58 / 712
Invalid sparse polygons	4

Fig. F.3. archp10k_000553: compact room groups with residual geometric drift.

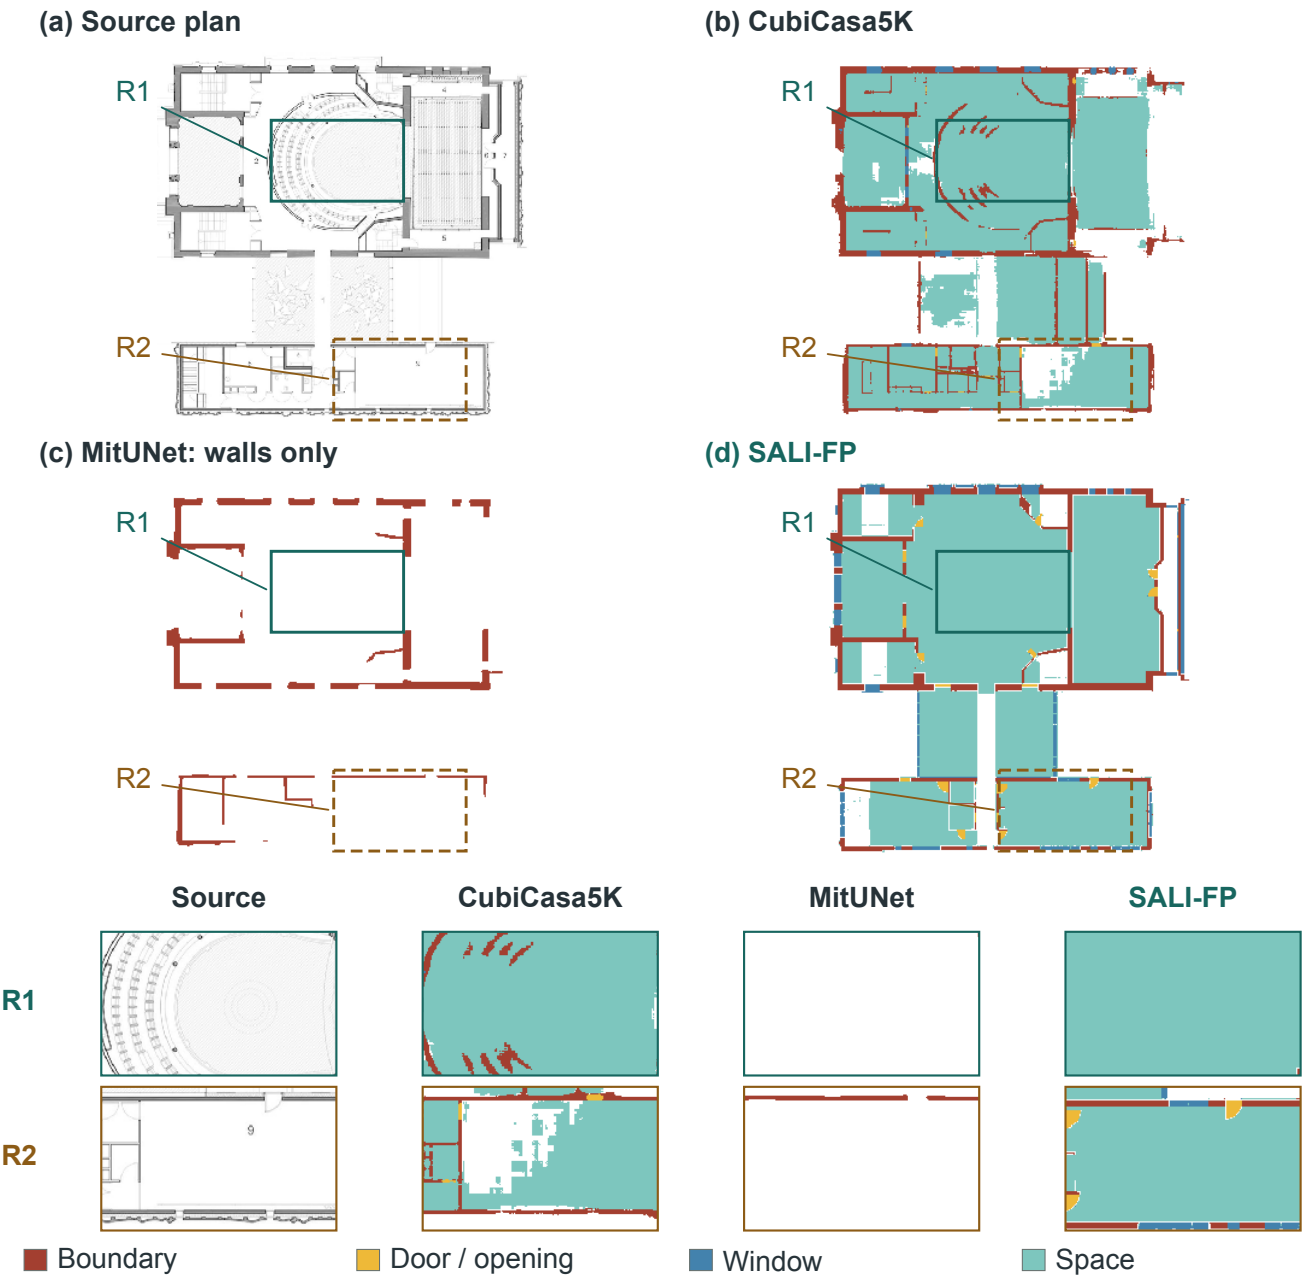

Overall comparison

SALI-FP preserves the linked upper and lower building masses and avoids much of the fragmented fill seen in CubiCasa5K. MitUNet detects some strong perimeter walls but loses many connecting segments. Within the auditorium, SALI-FP suppresses seating linework effectively, although it also simplifies genuine curved circulation features that should not be mistaken for recovered geometry.

Region R1

The central seating zone remains one coherent space in SALI-FP. CubiCasa5K introduces structural-colored arcs and isolated fragments within the seating pattern. SALI-FP avoids these additions, but does not retain the detailed curved aisle arrangement visible in the source.


Region R2

In the lower-right wing, SALI-FP maintains continuous spatial coverage and marks the entrance from the central connector. CubiCasa5K leaves a large fragmented gap in this wing. MitUNet keeps the outer strip more clearly than its internal connections.

SALI-FP output record

Internal RCR	0.9666
Shapes / control points	101 / 1,539
Invalid sparse polygons	7

Fig. F.4. archp10k_000734: auditorium linework and a linked lower wing.

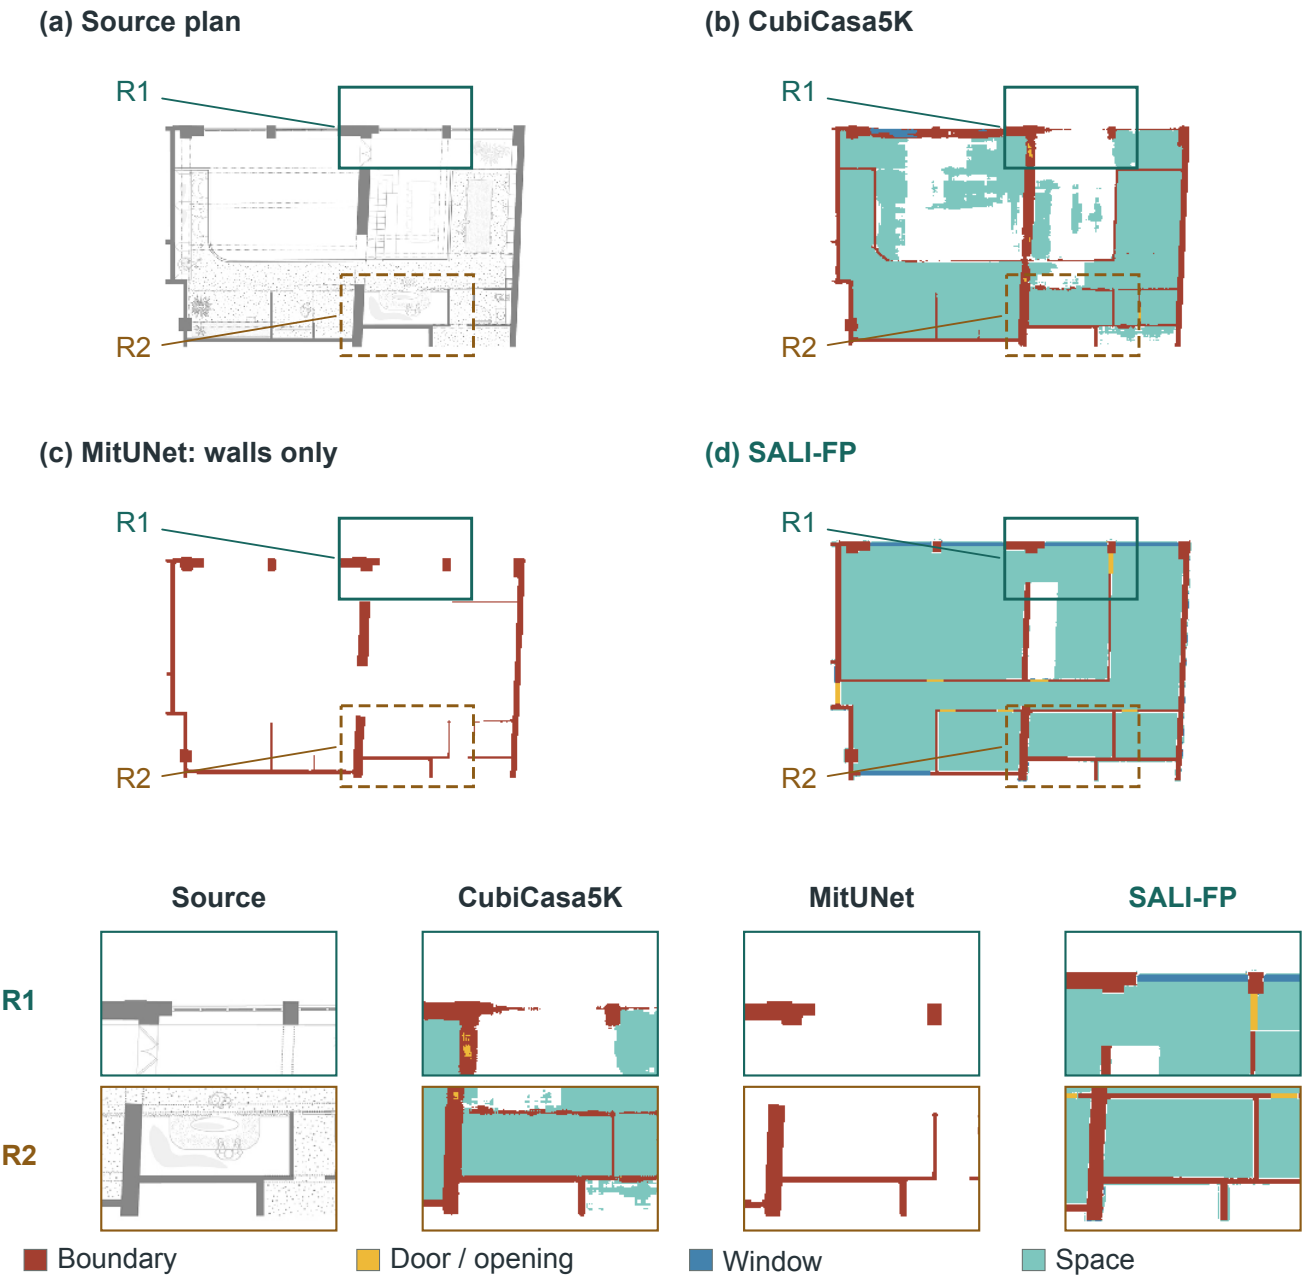

Overall comparison

SALI-FP retains a continuous rectangular envelope and a coherent central interior despite the dense furniture and surface textures. CubiCasa5K leaves large holes and adds bulky internal boundaries, whereas MitUNet mainly retains the heavier walls. The clearer SALI-FP fill is accompanied by a narrow interior cutout and some geometric displacement that still require review.

Region R1

Across the upper facade, SALI-FP preserves a sequence of window-colored links between structural piers. CubiCasa5K thickens the facade and loses several intervening spans. MitUNet largely reduces this edge to disconnected piers, consistent with its restricted wall-only prediction.


Region R2

The lower service strip remains connected to the horizontal circulation band in SALI-FP. CubiCasa5K produces ragged fill around the central junction, and MitUNet leaves incomplete junctions. SALI-FP still simplifies the fixture-rich rooms rather than recovering their internal equipment layout.

SALI-FP output record

Internal RCR	0.9740
Shapes / control points	40 / 494
Invalid sparse polygons	3

Fig. F.5. archp10k_000531: glazed frontage and an open central interior.

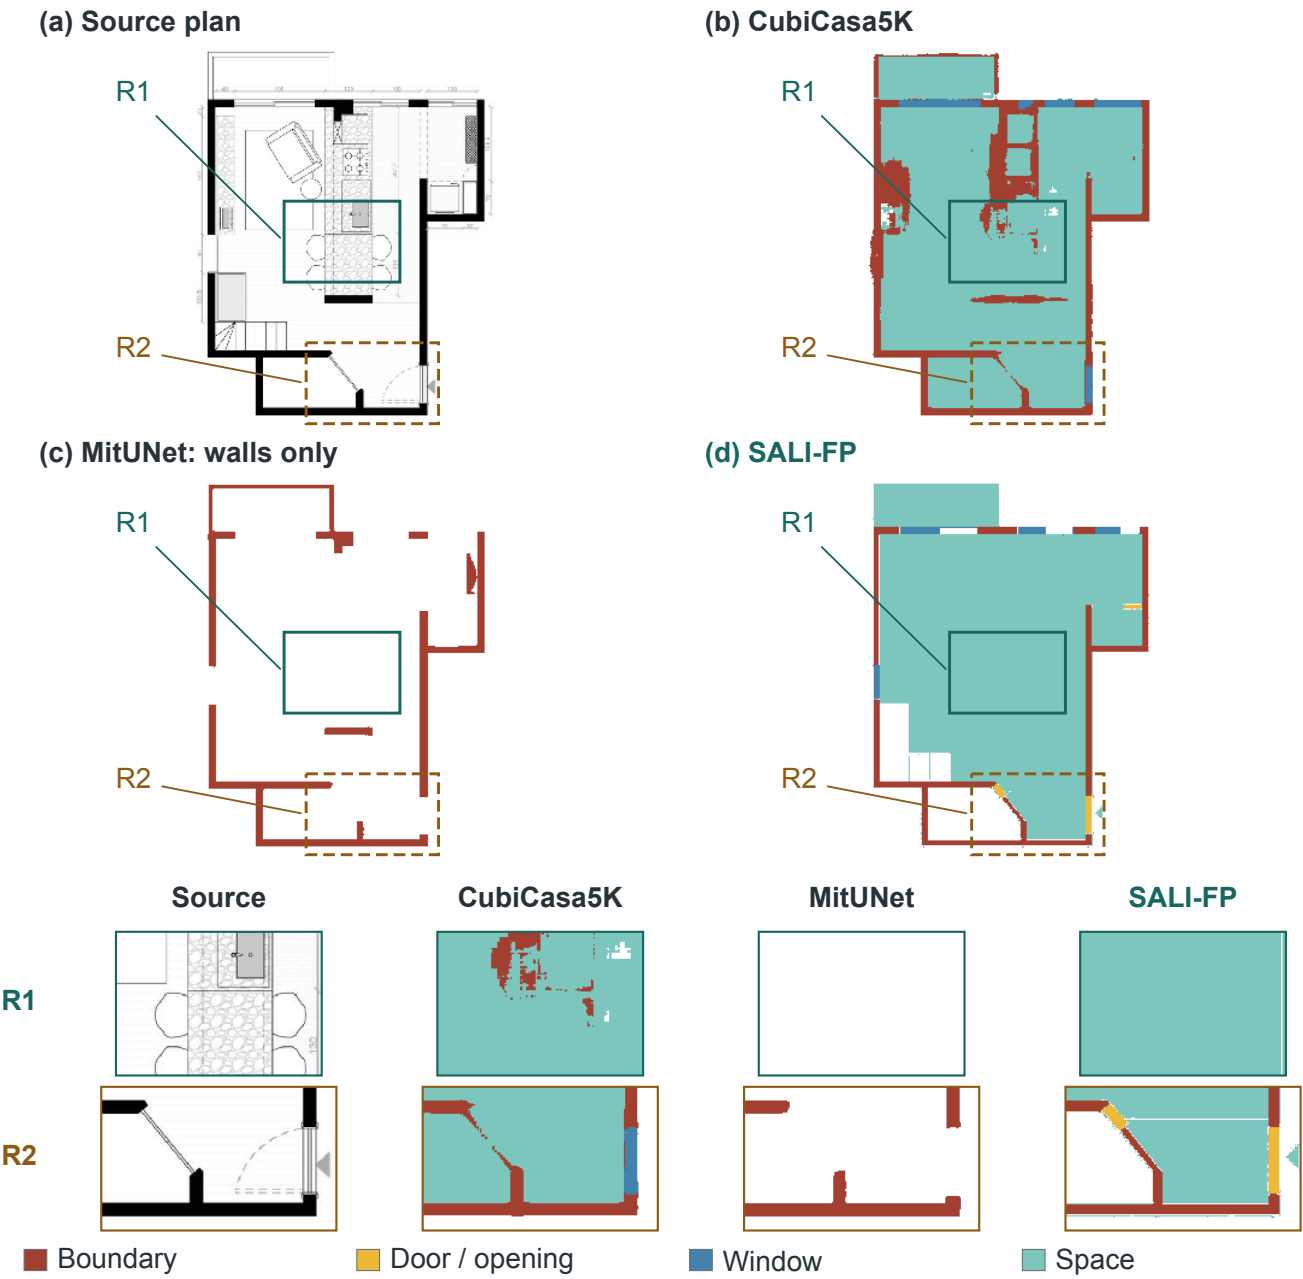

Overall comparison

In this compact interior, SALI-FP suppresses much of the furniture-driven structure that appears in CubiCasa5K. The retained envelope is easier to follow than MitUNet's disconnected perimeter. This does not resolve all ambiguity: the exterior rectangular feature above the main room receives spatial fill, and the output does not reproduce every small internal boundary faithfully.

Region R1

CubiCasa5K turns the central counter and surrounding texture into thick structural patches and a spurious horizontal fragment. SALI-FP keeps this area largely continuous. This is a visible reduction of furniture-related interference, rather than evidence that every counter boundary should be discarded.


Region R2

At the bottom entrance, SALI-FP retains the angled enclosure and separates the entrance opening from the solid wall. CubiCasa5K produces a less distinct opening transition. MitUNet leaves a gap in the enclosure, making the entrance geometry harder to trace.

SALI-FP output record

Internal RCR	0.9755
Shapes / control points	25 / 332
Invalid sparse polygons	5

Fig. F.6. archp10k_000870: furniture suppression and an angled entrance.

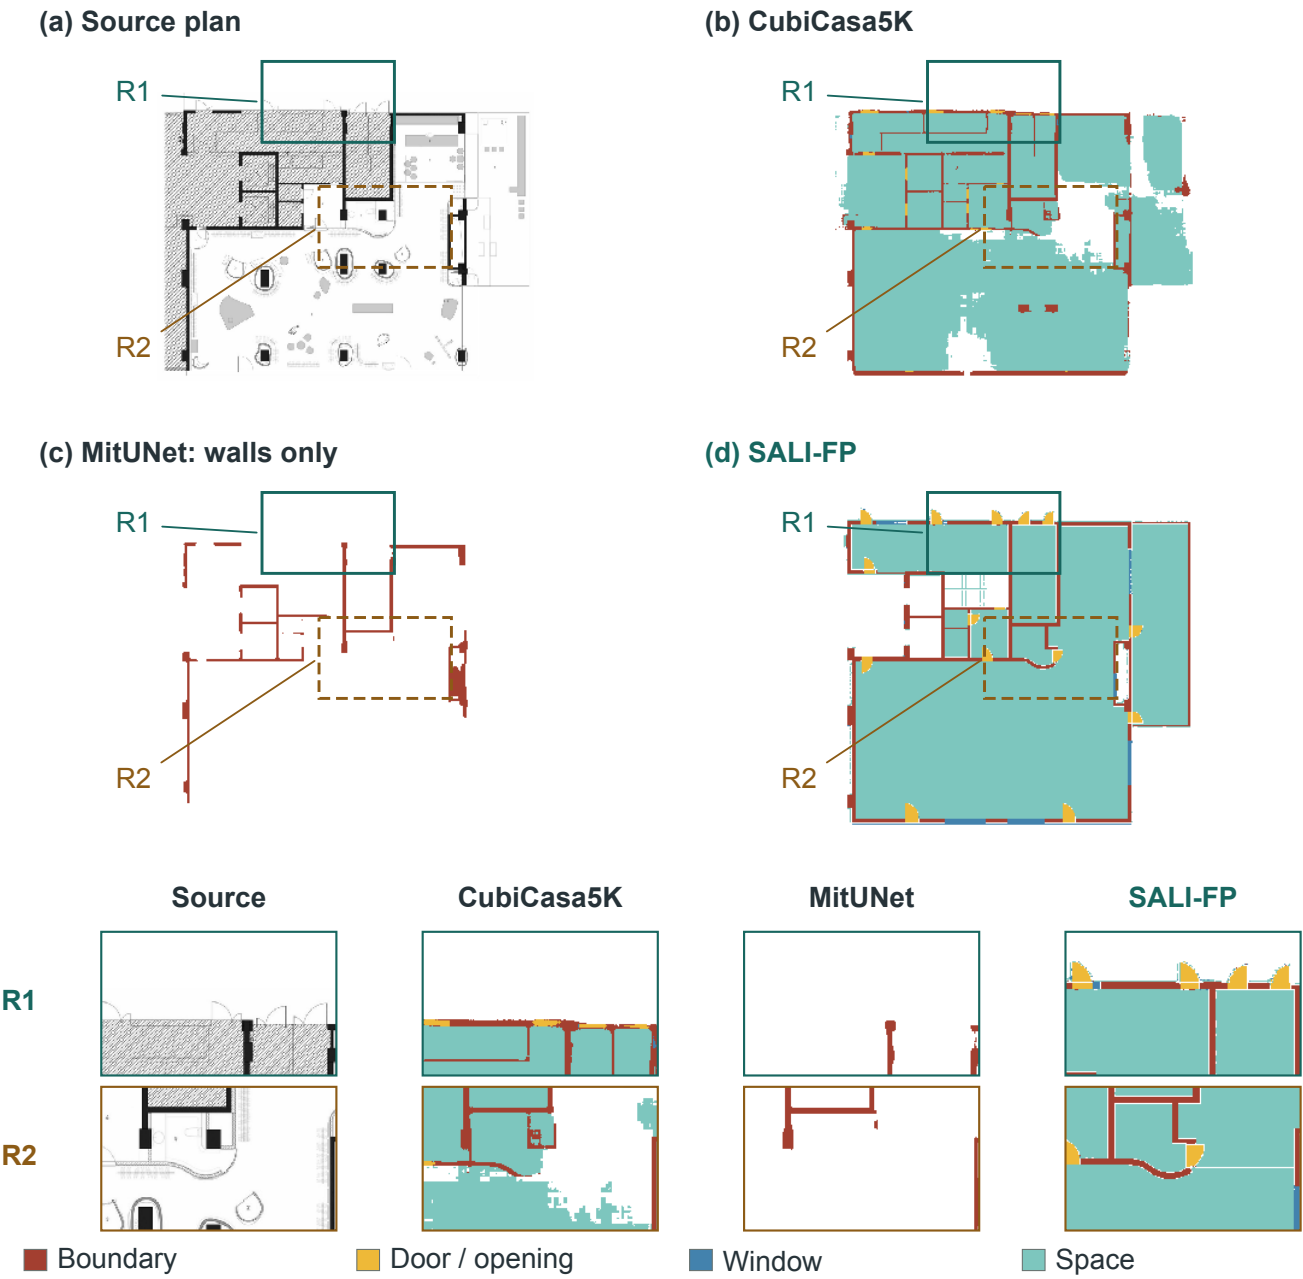

Overall comparison

SALI-FP gives the large furnished hall continuous coverage while retaining the upper service-room organization. CubiCasa5K fragments the hall near the right-hand recess and treats some interior objects as structure; MitUNet keeps only portions of the enclosing walls. SALI-FP nevertheless simplifies the upper-left rooms and does not preserve all small interior objects or source geometry.

Region R1

Along the upper edge, SALI-FP explicitly separates door-colored segments from the enclosing wall. CubiCasa5K merges several transitions into thin or thickened boundary bands. The source door swings support this local distinction, although their exact dimensions are not evaluated here.


Region R2

At the curved junction between the service rooms and the main hall, SALI-FP retains a continuous transition and adjacent opening. CubiCasa5K leaves fragmented coverage around the same recess, while MitUNet's local outline is broken. Some curvature is still regularized in SALI-FP.

SALI-FP output record

Internal RCR	0.9699
Shapes / control points	56 / 899
Invalid sparse polygons	6

Fig. F.7. archp10k_000515: door sequences and a curved lobby junction.

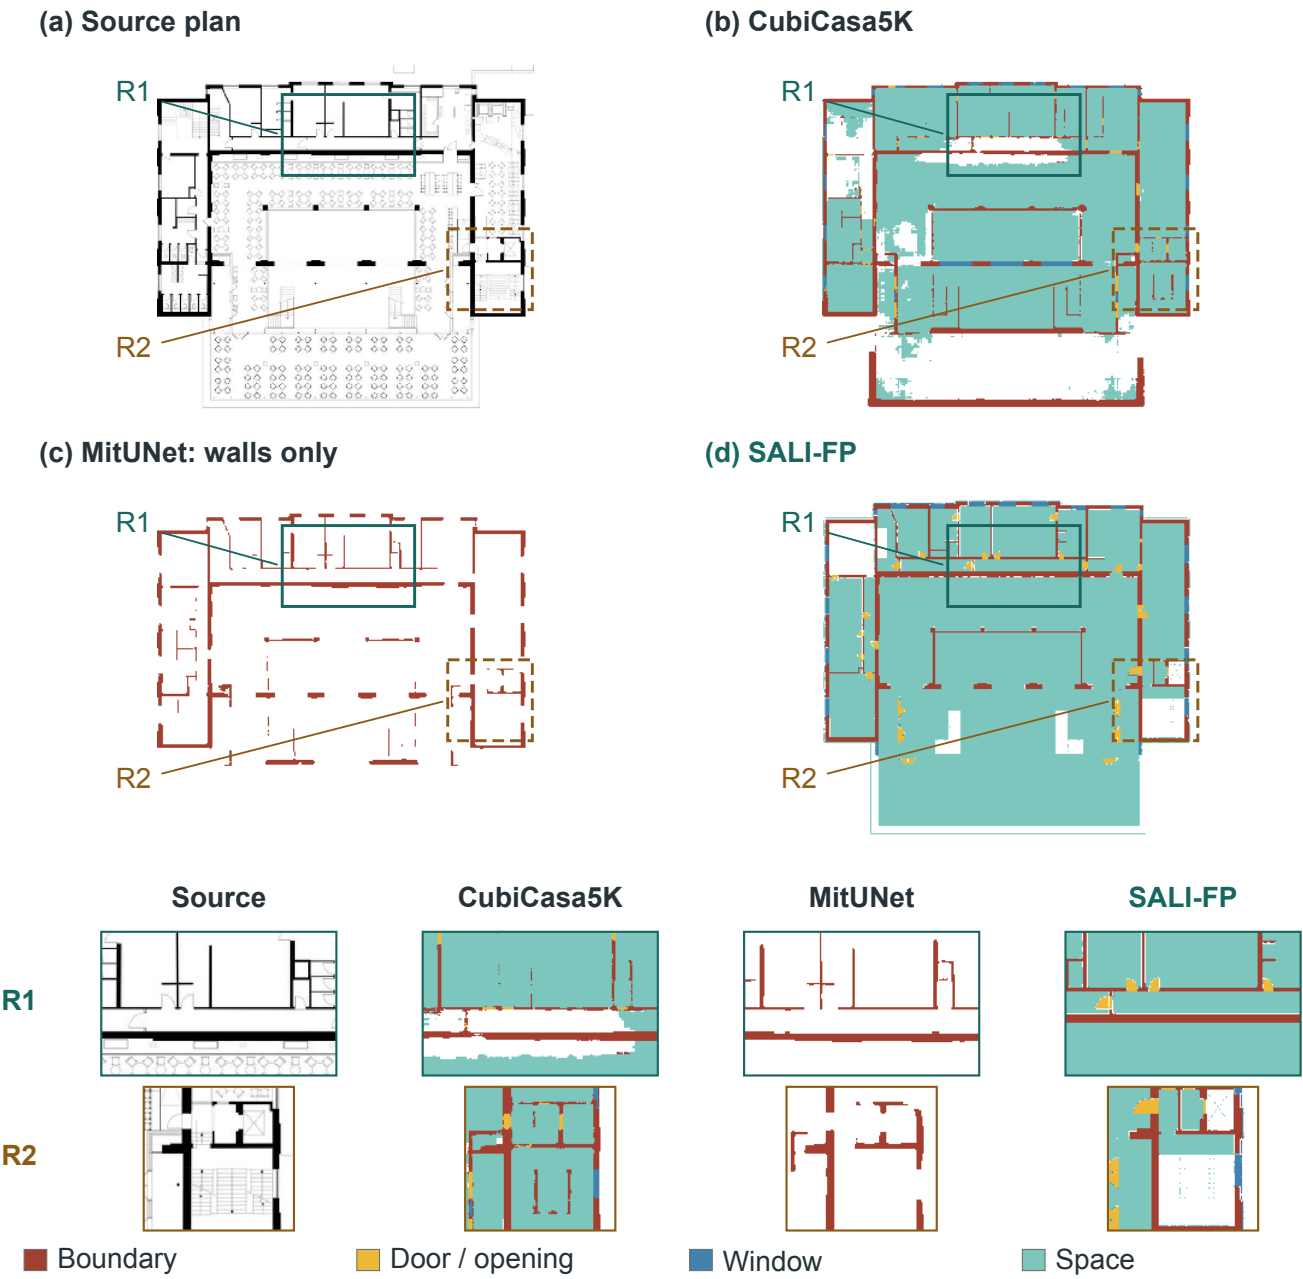

Overall comparison

SALI-FP retains the major wings and repeated entrances around the central dining zone more coherently than the baselines. CubiCasa5K fills some regions unevenly and breaks the upper circulation band; MitUNet loses several weak connections. The interpretation of the central open region and lower terrace remains uncertain, so complete semantic correctness is not inferred from coverage alone.

Region R1

The upper corridor shows distinct entrance markers and connected room dividers in SALI-FP. CubiCasa5K leaves a long gap through this band and weakly distinguishes several doors. MitUNet detects parts of the dividers but does not maintain all connections to the corridor wall.


Region R2

At the lower-right stair bay, SALI-FP keeps the enclosure and neighboring entrance distinct from the dining area. CubiCasa5K largely fills the bay and blurs its interior transitions. The stair itself is not a separate class in the common display, so its blank interior is not scored as an omission.

SALI-FP output record

Internal RCR	0.9643
Shapes / control points	110 / 1,555
Invalid sparse polygons	12

Fig. F.8. archp10k_000802: dining circulation and repeated room entrances.

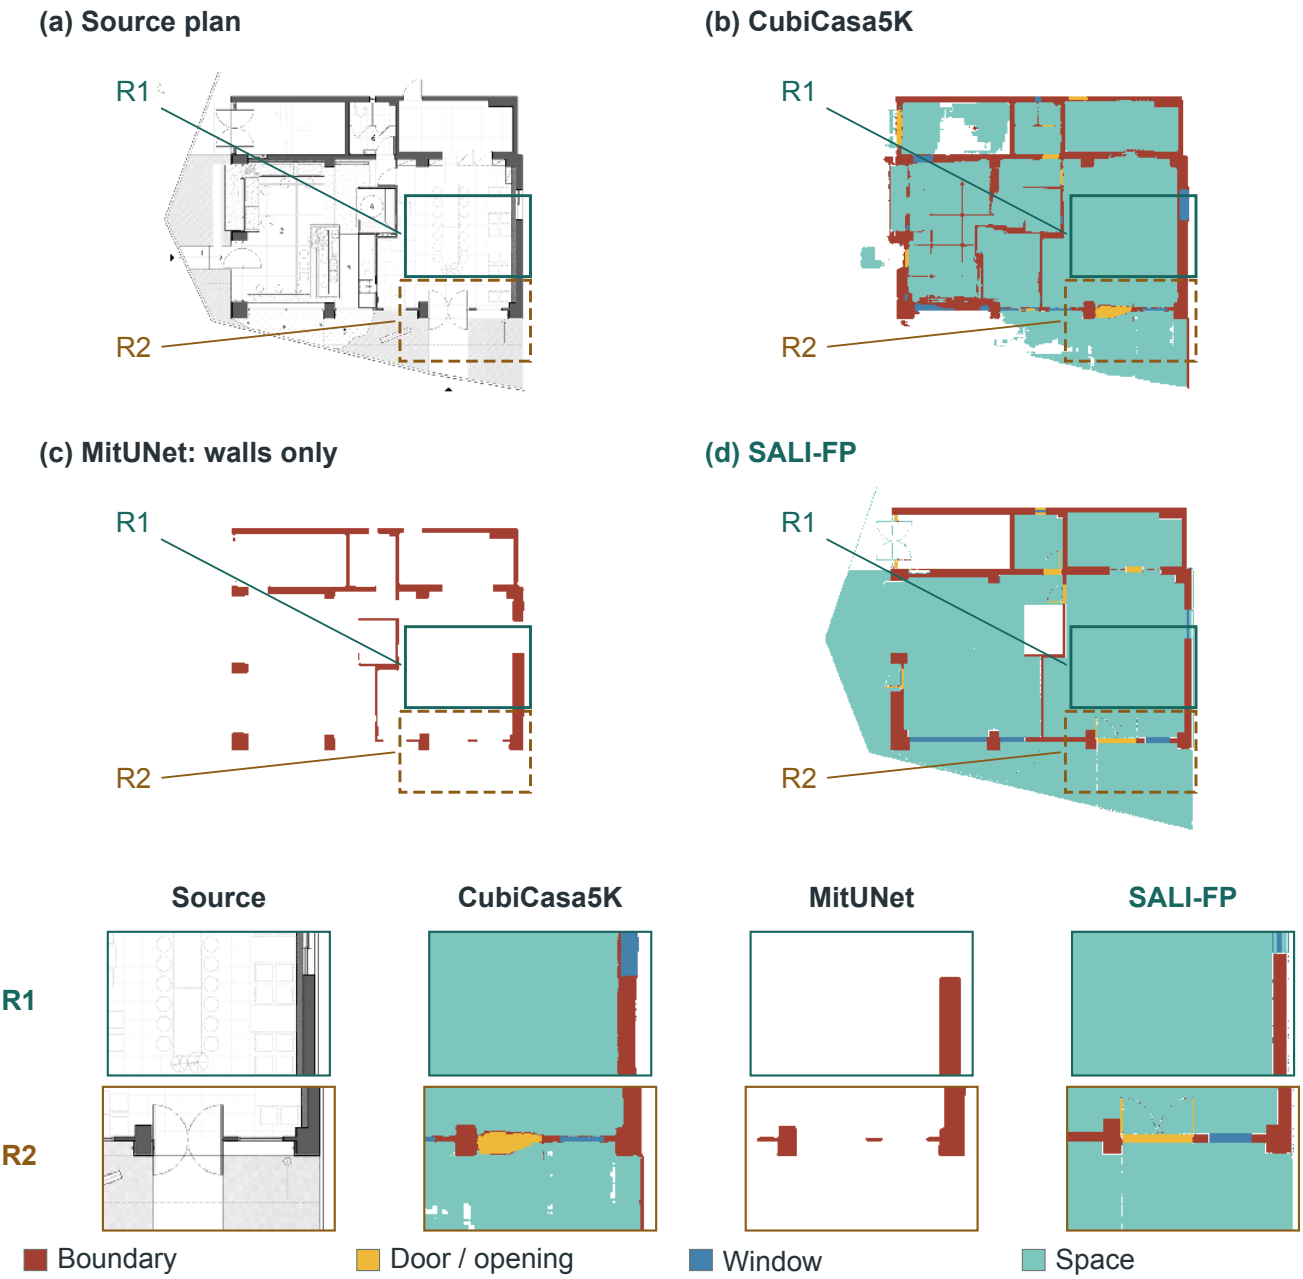

Overall comparison

SALI-FP represents the dining-room facade and entrance more distinctly, while CubiCasa5K adds several counter-related partitions in the left half. MitUNet retains strong wall segments but loses connections along the frontage. Neither semantic map resolves the terrace consistently; SALI-FP also displaces parts of the layout and leaves an upper room unfilled, preventing a whole-plan superiority claim.

Region R1

Along the right-hand dining facade, SALI-FP provides a cleaner sequence of structural and window segments than CubiCasa5K's thickened edge. MitUNet leaves long gaps between wall fragments. The retained distinction is useful for tracing the facade, although registration remains imperfect.


Region R2

The lower double entrance is represented by a distinct opening in SALI-FP; CubiCasa5K produces a broader, less localized patch. The source provides visible swing evidence. Both outputs extend fill into the adjoining exterior area, which is a separate unresolved semantic issue.

SALI-FP output record

Internal RCR	0.9759
Shapes / control points	41 / 770
Invalid sparse polygons	6

Fig. F.9. archp10k_000776: dining-room openings with terrace ambiguity.

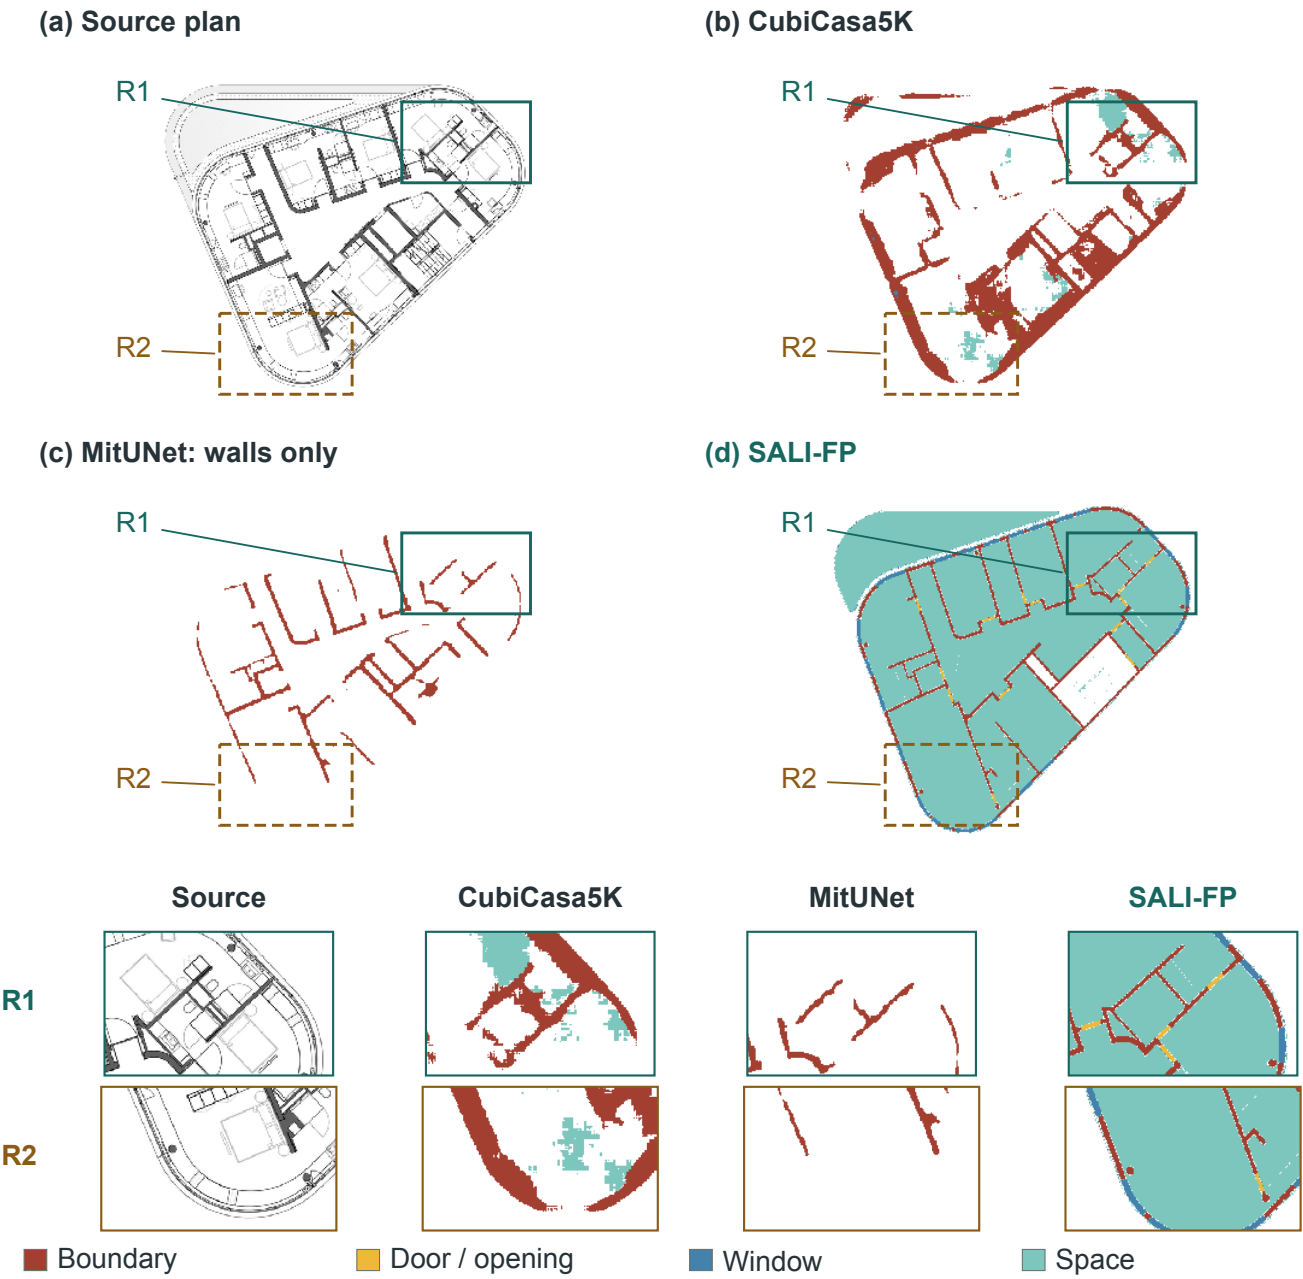

Overall comparison

SALI-FP retains the rounded triangular envelope and connected room wings. CubiCasa5K leaves most rooms blank and fragments the curved perimeter; MitUNet detects partitions but incompletely recovers the outer boundary. SALI-FP still fills an exterior strip and simplifies bathroom divisions, so its strongest advantage is the main spatial organization.

Region R1

Around the right-hand curve, SALI-FP maintains a continuous room envelope with separated facade segments. CubiCasa5K gives patchy coverage and ragged wall traces. MitUNet's curve is incomplete, leaving the connection between the oblique room wing and the rounded end difficult to follow.


Region R2

In the lower curved wing, SALI-FP retains the enclosing arc and the room-to-corridor division. CubiCasa5K leaves substantial gaps in the room interior and thickens the service core. SALI-FP's simplified bathroom arrangement remains a visible loss of detail within this otherwise coherent wing.

SALI-FP output record

Internal RCR	0.9580
Shapes / control points	86 / 1,721
Invalid sparse polygons	3

Fig. F.10. archp10k_000896: curved hotel perimeter and oblique room wings.

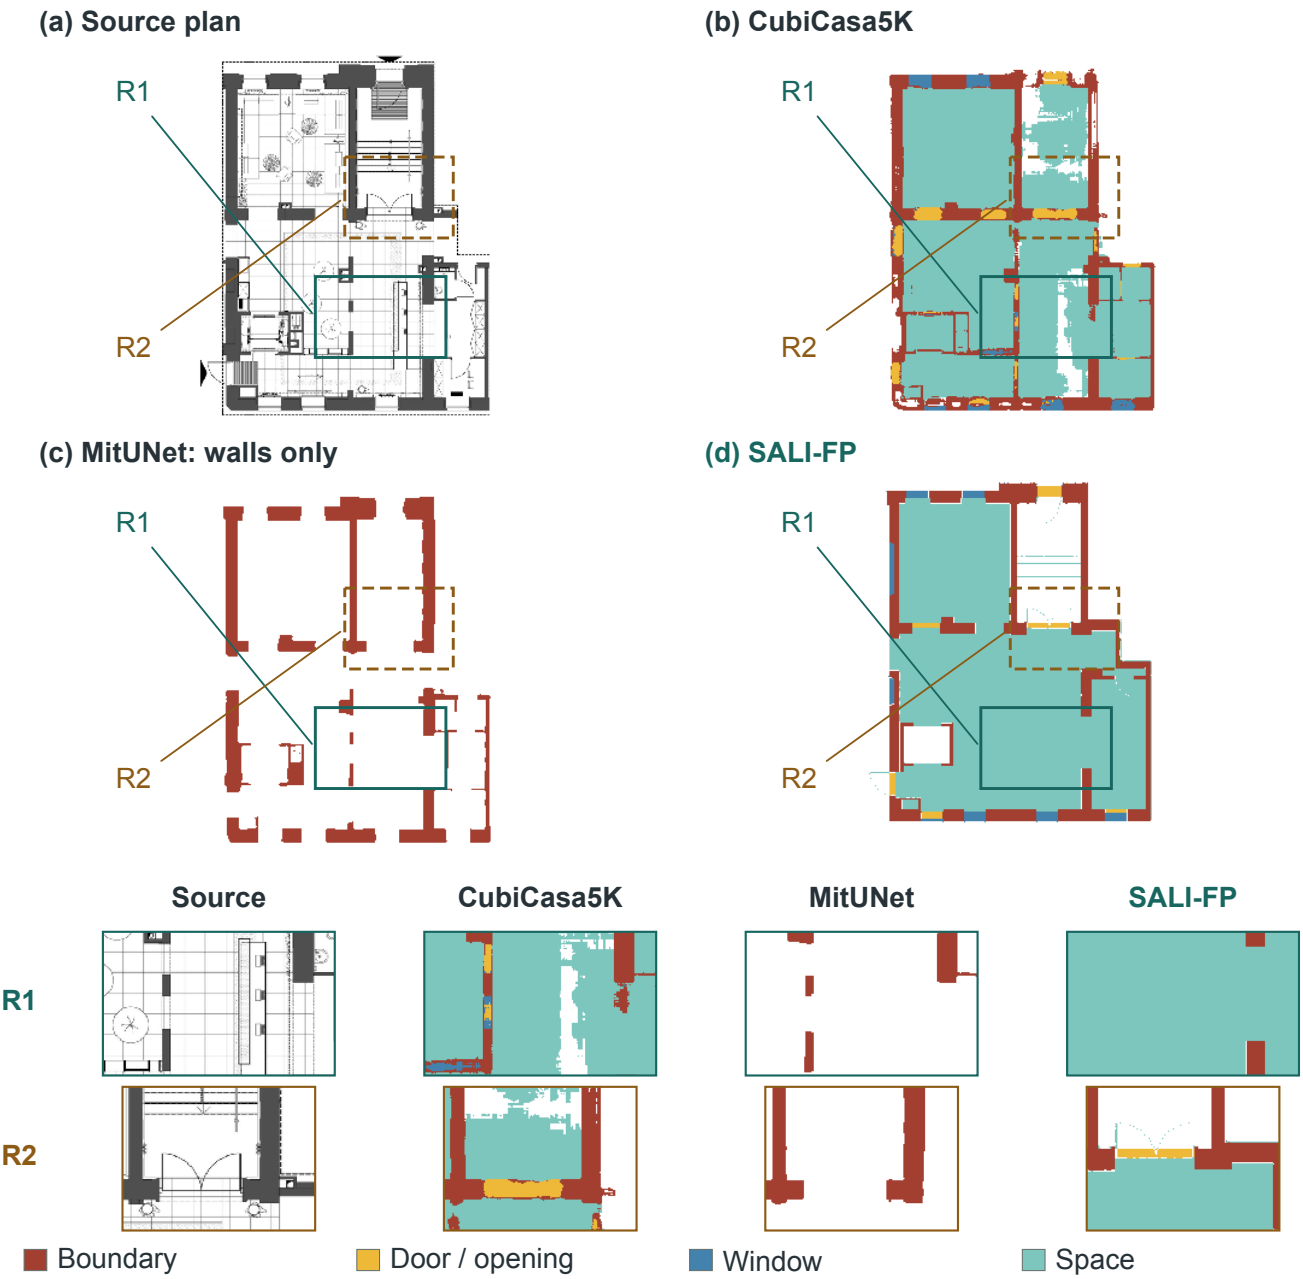

Overall comparison

SALI-FP avoids several central divisions that CubiCasa5K introduces along counters and furniture, yielding more continuous circulation through the lower hall. MitUNet retains heavy walls but breaks several connections. The stair bay is kept distinct, yet SALI-FP simplifies the right-hand service rooms and removes some interior boundaries whose architectural role cannot be resolved from this overview alone.

Region R1

CubiCasa5K inserts a strong vertical separation through the counter-rich center and leaves adjacent fill fragmented. SALI-FP keeps a clearer route through this open area. The difference should be read against the furniture layout, since low partitions cannot be classified reliably by appearance alone.


Region R2

At the upper-right stair entrance, SALI-FP maintains a distinct opening and a bounded stair zone. CubiCasa5K mixes irregular spatial fill into that zone, while MitUNet leaves the threshold disconnected. The comparison concerns enclosure and access, not classification of individual stair treads.

SALI-FP output record

Internal RCR	0.9778
Shapes / control points	42 / 534
Invalid sparse polygons	3

Fig. F.11. archp10k_000737: open circulation around a stair entrance.

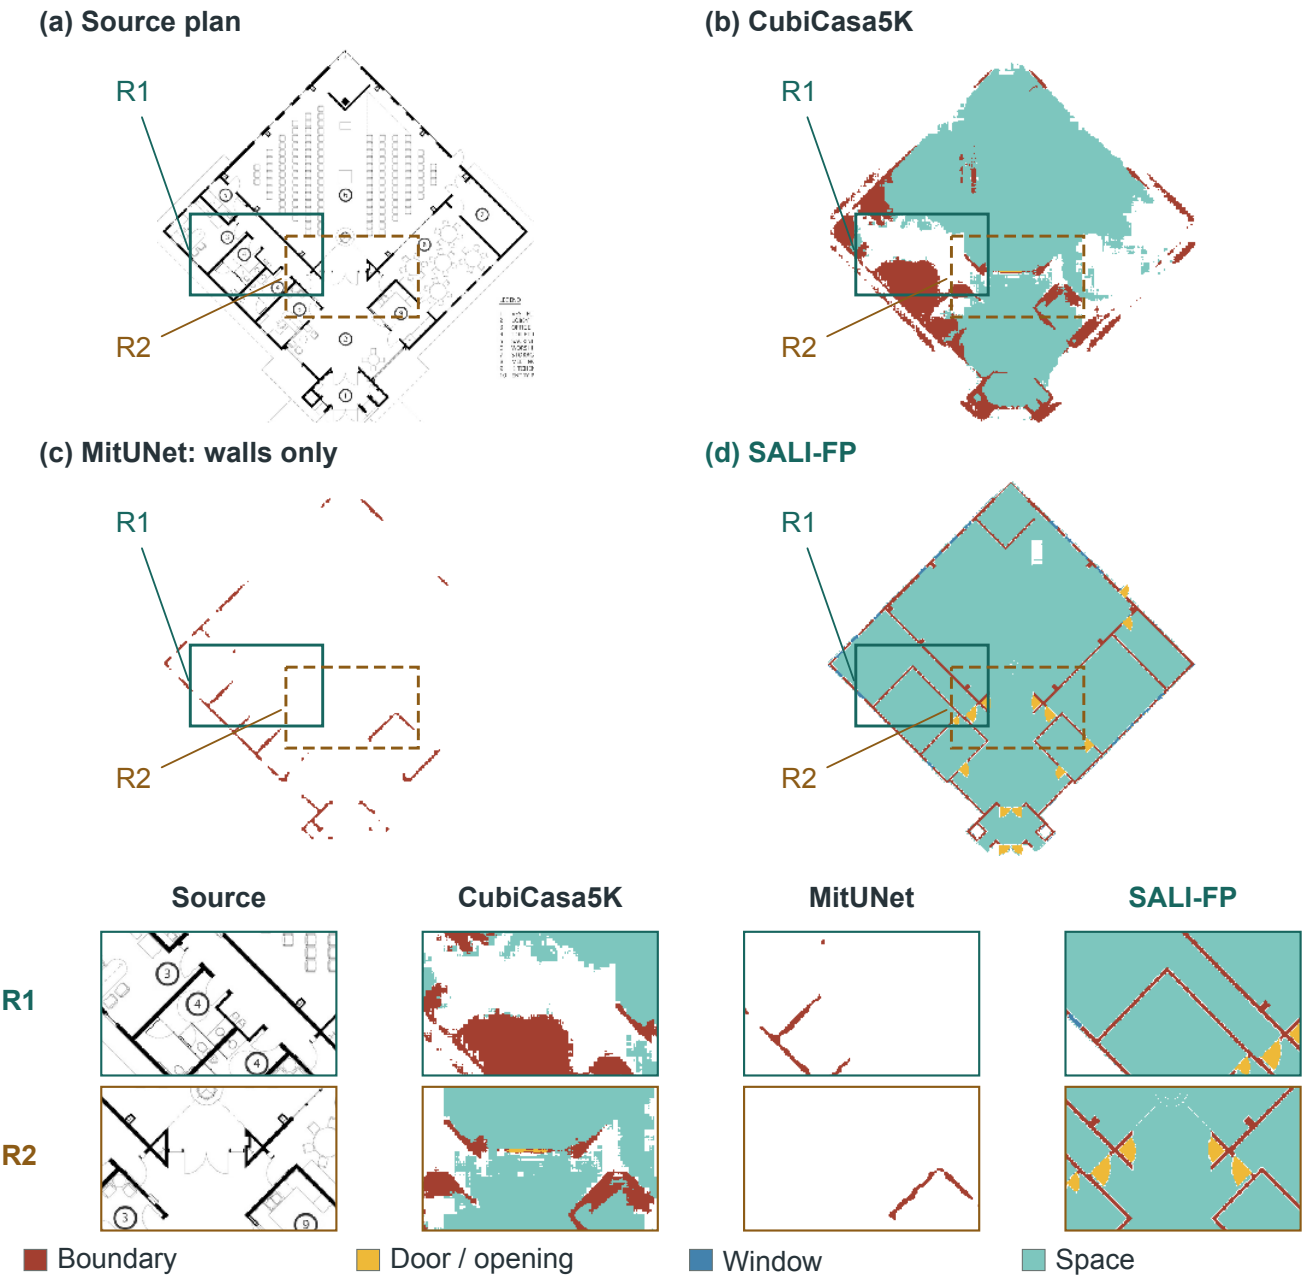

Overall comparison

SALI-FP recovers the diamond-shaped envelope and its diagonal circulation more coherently than either baseline. CubiCasa5K introduces broad structural patches around side rooms, while MitUNet misses long perimeter sections. The SALI-FP layout retains the principal entrances but merges several small service compartments, so its advantage in large-scale organization does not extend to complete room-level recovery.

Region R1

Along the left wing, SALI-FP replaces CubiCasa5K's bulky, fragmented structural patches with connected room boundaries and opening markers. MitUNet recovers only fragments of these diagonal walls. However, the small toilet compartments visible in the source are not all separately preserved.


Region R2

At the hall-to-lobby junction, SALI-FP retains the opposed entrances and the angled dividing walls. CubiCasa5K produces irregular fill across this transition, and MitUNet incompletely connects the dividers. The source door swings make this a clearer local comparison than the sparsely detailed hall interior.

SALI-FP output record

Internal RCR	0.9593
Shapes / control points	64 / 1,149
Invalid sparse polygons	6

Fig. F.12. archp10k_000709: diamond-shaped hall and diagonal access routes.

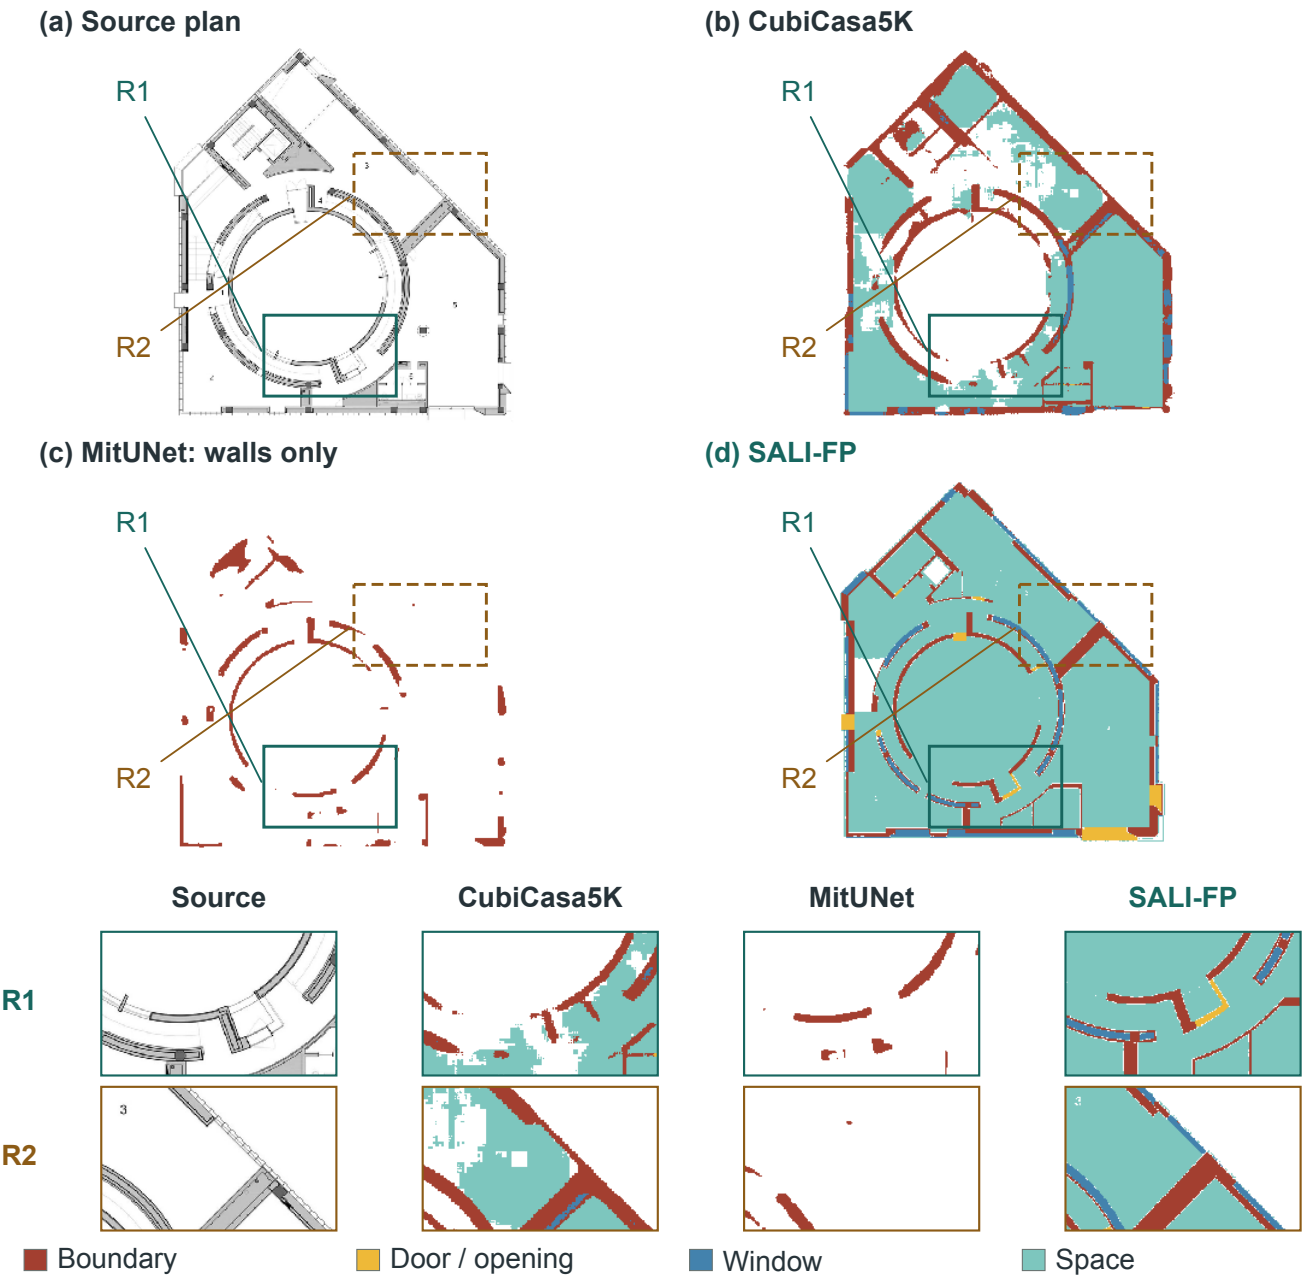

Overall comparison

SALI-FP preserves the circular core, surrounding circulation and angular outer envelope as a more continuous arrangement. CubiCasa5K retains much of the circle but leaves patchy adjoining regions; MitUNet fragments both the arcs and perimeter. SALI-FP changes the scale of some parts and fills the central circle, whose functional interpretation is not established by the displayed common classes.

Region R1

The lower concentric boundaries and intervening passage are more continuously represented in SALI-FP. CubiCasa5K breaks the adjoining fill into fragments, whereas MitUNet leaves gaps in the arcs. SALI-FP also retains an opening at the lower access point, although the detailed curvature is regularized.


Region R2

At the right-hand transition from the diagonal wing to the vertical facade, SALI-FP keeps connected boundary and window segments. CubiCasa5K thickens the junction; MitUNet loses much of the outer edge. The shared coordinates reveal a remaining displacement of the circular core.

SALI-FP output record

Internal RCR	0.9576
Shapes / control points	56 / 1,653
Invalid sparse polygons	10

Fig. F.13. archp10k_000716: concentric boundaries within an angular envelope.

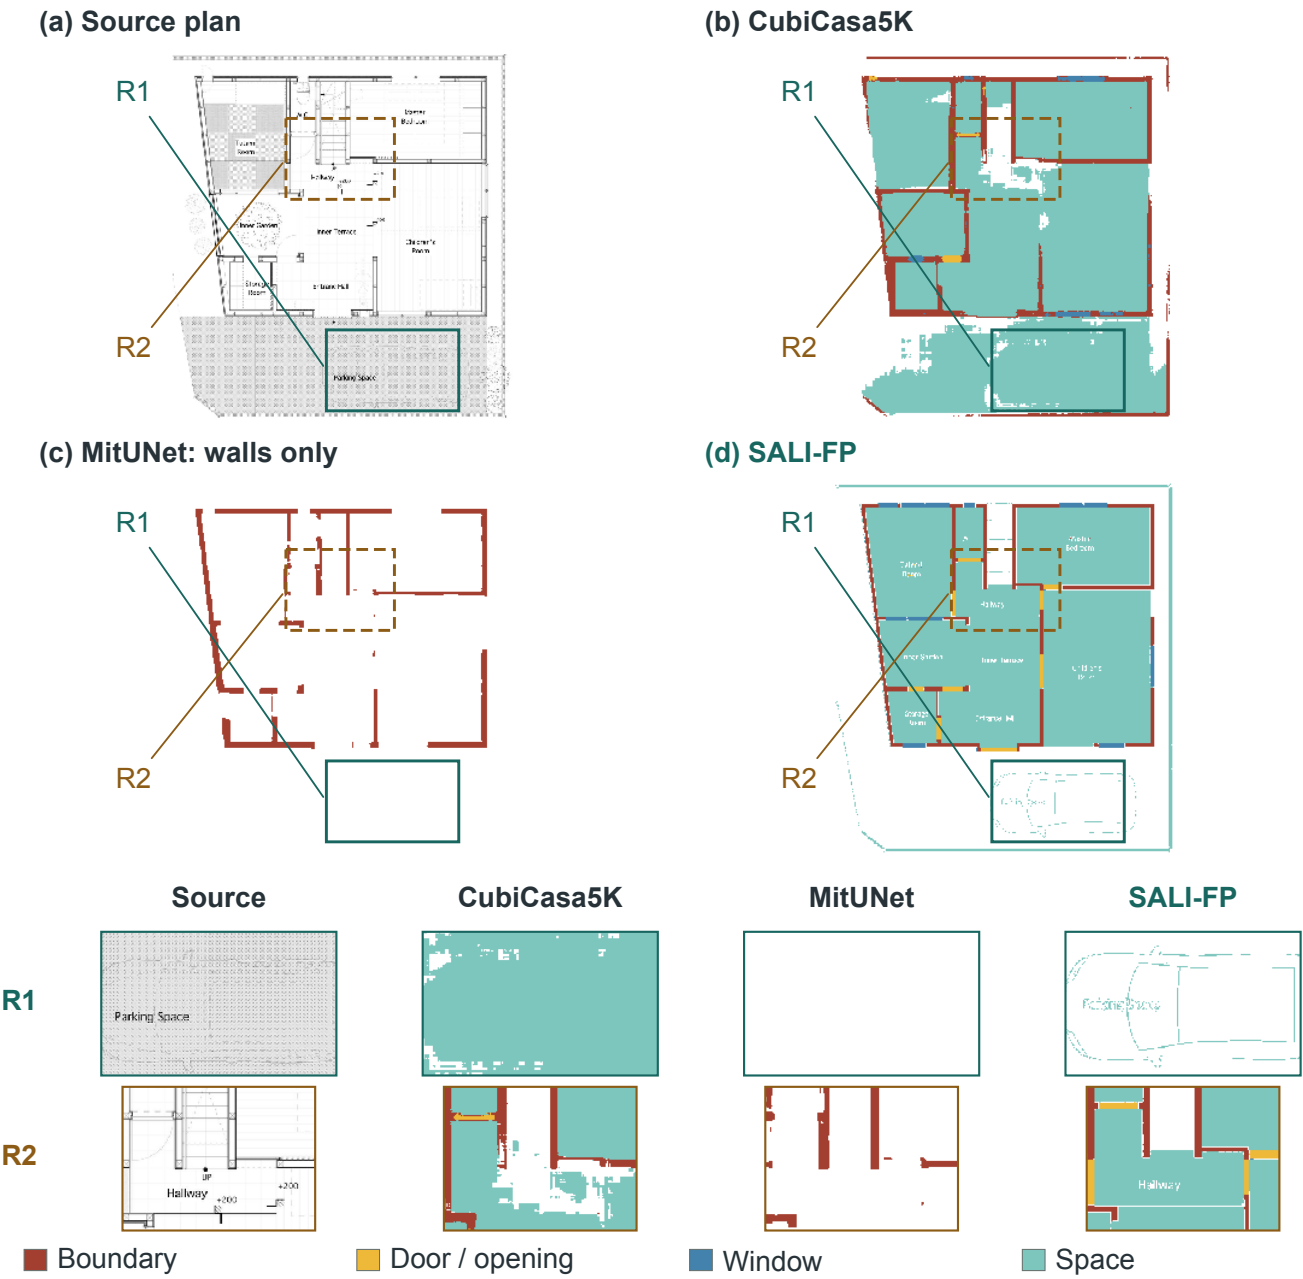

Overall comparison

SALI-FP distinguishes the main interior from the large parking zone more clearly than CubiCasa5K, which spreads room-colored fill across the parking area. MitUNet retains several enclosing walls but incompletely connects the narrow core. SALI-FP's result is not fully clean: residual text and vehicle linework remain, and the inner garden is not distinguished from occupied rooms in this common display.

Region R1

The lower parking zone remains largely unfilled in SALI-FP instead of becoming a broad room-colored region as in CubiCasa5K. This matches the labeled exterior use in the source. Fine vehicle and site-line remnants nevertheless remain in the SALI-FP output.


Region R2

Within the narrow upper core, SALI-FP keeps the stair strip and hallway boundaries more distinct. CubiCasa5K fragments the adjoining fill, and MitUNet breaks the slender partitions. The benefit concerns separation of the core rather than exact preservation of step geometry.

SALI-FP output record

Internal RCR	0.9458
Shapes / control points	59 / 2,182
Invalid sparse polygons	12

Fig. F.14. archp10k_000726: parking exclusion and a narrow circulation core.

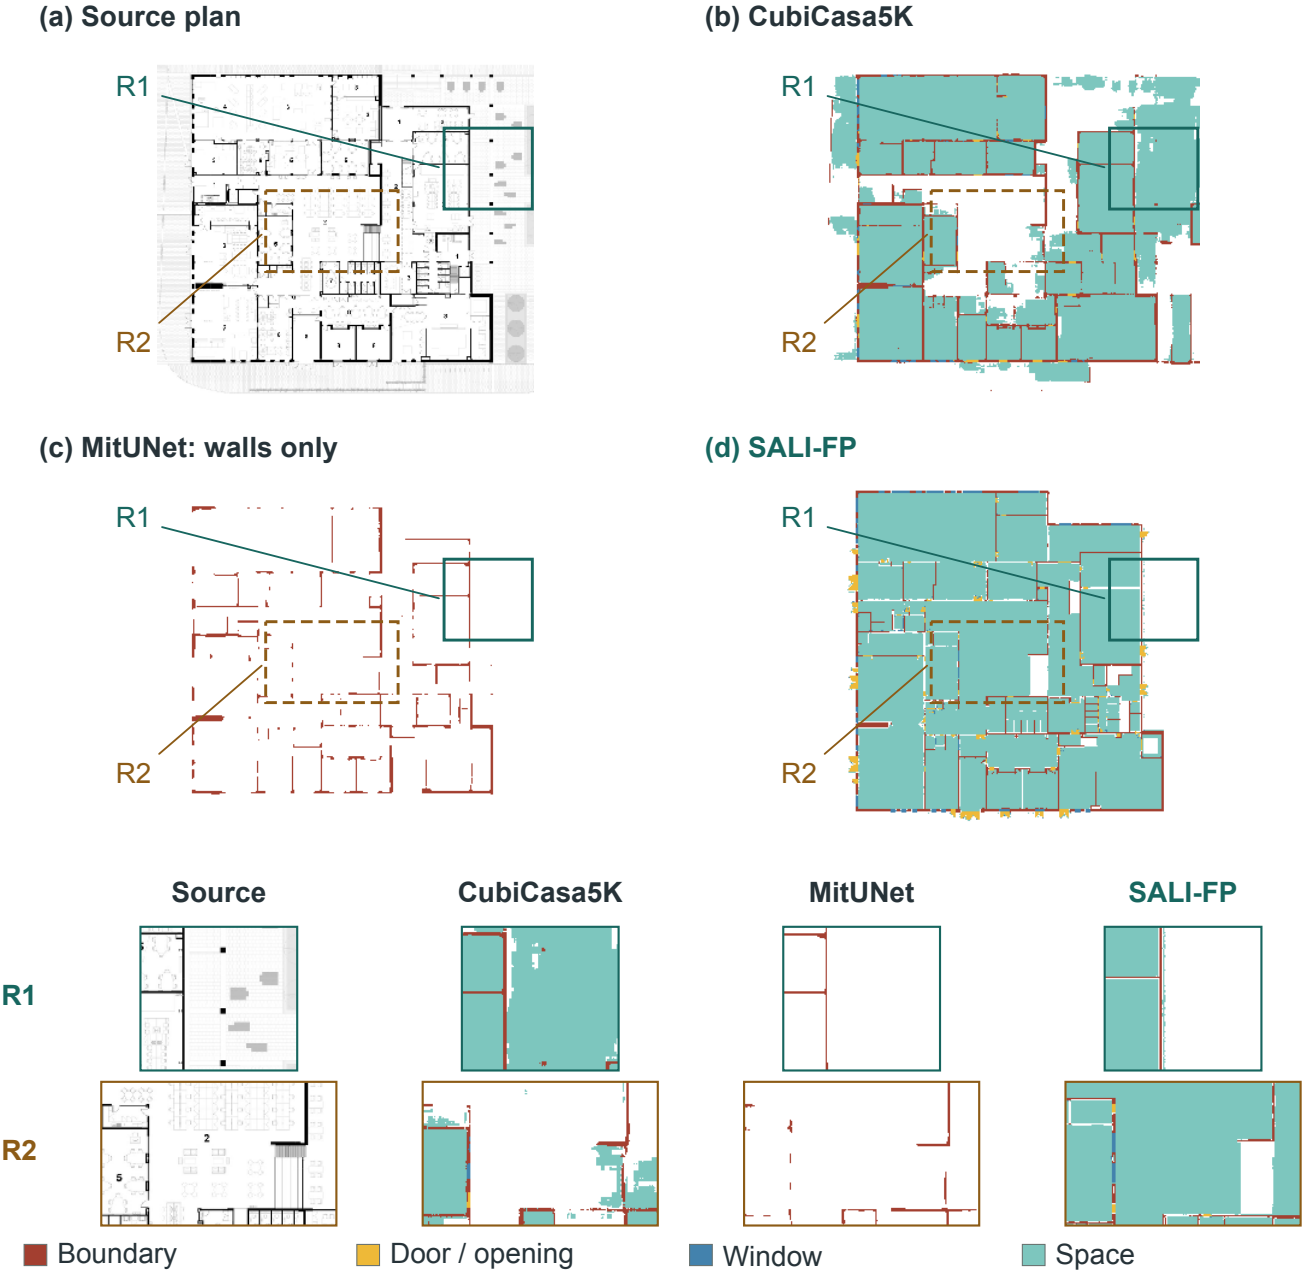

Overall comparison

SALI-FP retains the school layout and central circulation more coherently than CubiCasa5K, which leaves internal gaps and extensive exterior fill. MitUNet detects wall fragments without consistently connecting them. SALI-FP preserves many entrances, although some small rooms remain simplified; its main benefits are connected coverage and reduced exterior spill.

Region R1

Outside the upper-right wing, CubiCasa5K spreads room-colored regions into the surrounding site. SALI-FP largely confines the main fill to the building edge. The source terrace and exterior furniture remain visible for checking this distinction; minor boundary offsets should still be inspected.

Region R2

SALI-FP connects the central circulation hall to surrounding room thresholds. CubiCasa5K leaves a large blank interior despite the visible hall in the source, while MitUNet retains disconnected partitions. The SALI-FP advantage is continuous coverage with entrances, not recovery of the furniture arrangement.

SALI-FP output record

Internal RCR	0.9513
Shapes / control points	201 / 2,863
Invalid sparse polygons	17

Fig. F.15. archp10k_000657: connected school circulation and restrained exterior fill.



Overall comparison

SALI-FP retains the long circulation structure and more small entrance transitions than the baselines. CubiCasa5K leaves irregular gaps through the upper interior; MitUNet misses many thin partitions and facade connections. The source also contains double-height and exterior regions that SALI-FP fills, so the cleaner spatial map should not be interpreted as complete recovery of floor-versus-void semantics.

Region R1

Across the upper service group, SALI-FP keeps small enclosures and distinct entrance markers. CubiCasa5K merges several transitions into thin boundary bands, whereas MitUNet incompletely links the partitions. These differences are particularly visible around the stair landing and toilet-room access.


Region R2

The central doorway sequence remains explicit in SALI-FP instead of being absorbed into broad room regions. CubiCasa5K weakly separates the adjoining areas, and MitUNet loses several connecting walls. The double-height labels in the source still require a separate semantic interpretation.

SALI-FP output record

Internal RCR	0.9538
Shapes / control points	84 / 1,338
Invalid sparse polygons	10

Fig. F.16. archp10k_000662: service-room access in a vertically organized office.

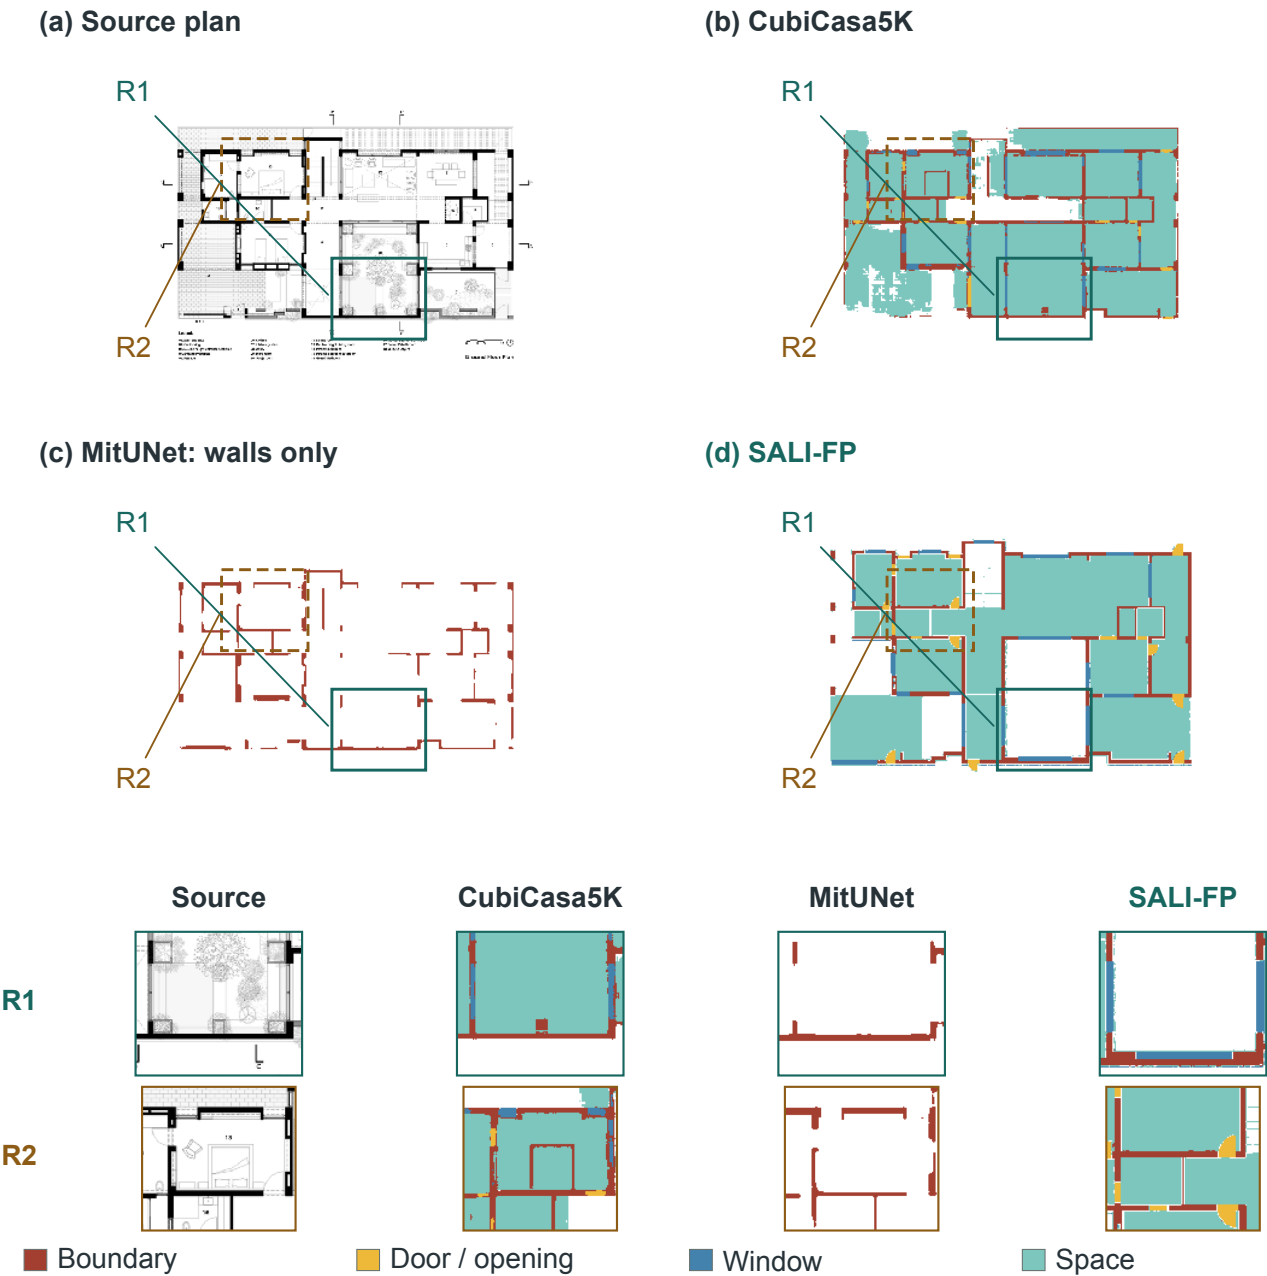

Overall comparison

SALI-FP retains the central courtyard as an unfilled opening while CubiCasa5K treats it as a continuous room-colored region. It also keeps a clearer entrance sequence around the upper rooms than MitUNet's fragmented walls. Other distinctions are less reliable: the garden and parking areas are not consistently separated from indoor space, and the overall footprint is displaced relative to the source.

Region R1

The planted central courtyard provides direct visual evidence for leaving an open region. SALI-FP preserves this void, unlike CubiCasa5K's full spatial fill. MitUNet records only parts of its enclosing walls. The courtyard outline in SALI-FP is cleaner but remains offset.

Region R2

At the upper-left bedroom access, SALI-FP retains an opening next to the room partition. CubiCasa5K gives less distinct doorway transitions; MitUNet breaks parts of the enclosure. This local benefit does not establish the correctness of the adjoining outdoor-space labels.

SALI-FP output record

Internal RCR	0.9506
Shapes / control points	87 / 1,143
Invalid sparse polygons	9

Fig. F.17. archp10k_000713: courtyard exclusion and bedroom access.



Overall comparison

SALI-FP recovers the long oblique office wing that CubiCasa5K largely misses, and connects more of its partitions than MitUNet. The right-hand service group is also more legible. However, SALI-FP fills the explicitly labeled central void, which is a substantial semantic error. The case therefore demonstrates stronger wing recovery alongside a clear unresolved limitation.

Region R1

Along the left-hand office row, SALI-FP retains repeated dividers and entrance markers. CubiCasa5K leaves most of this wing blank, while MitUNet traces only incomplete thin walls. The local advantage is strong despite simplification of the small offices and their individual door geometry.


Region R2

The service junction above the void shows clearer room boundaries and door transitions in SALI-FP than in CubiCasa5K. MitUNet leaves several disconnected ends. The neighboring central void remains incorrectly filled, so improved junction detail does not imply correct spatial semantics throughout the plan.

SALI-FP output record

Internal RCR	0.9506
Shapes / control points	119 / 3,017
Invalid sparse polygons	4

Fig. F.18. archp10k_000820: oblique office wing with an unresolved central void.

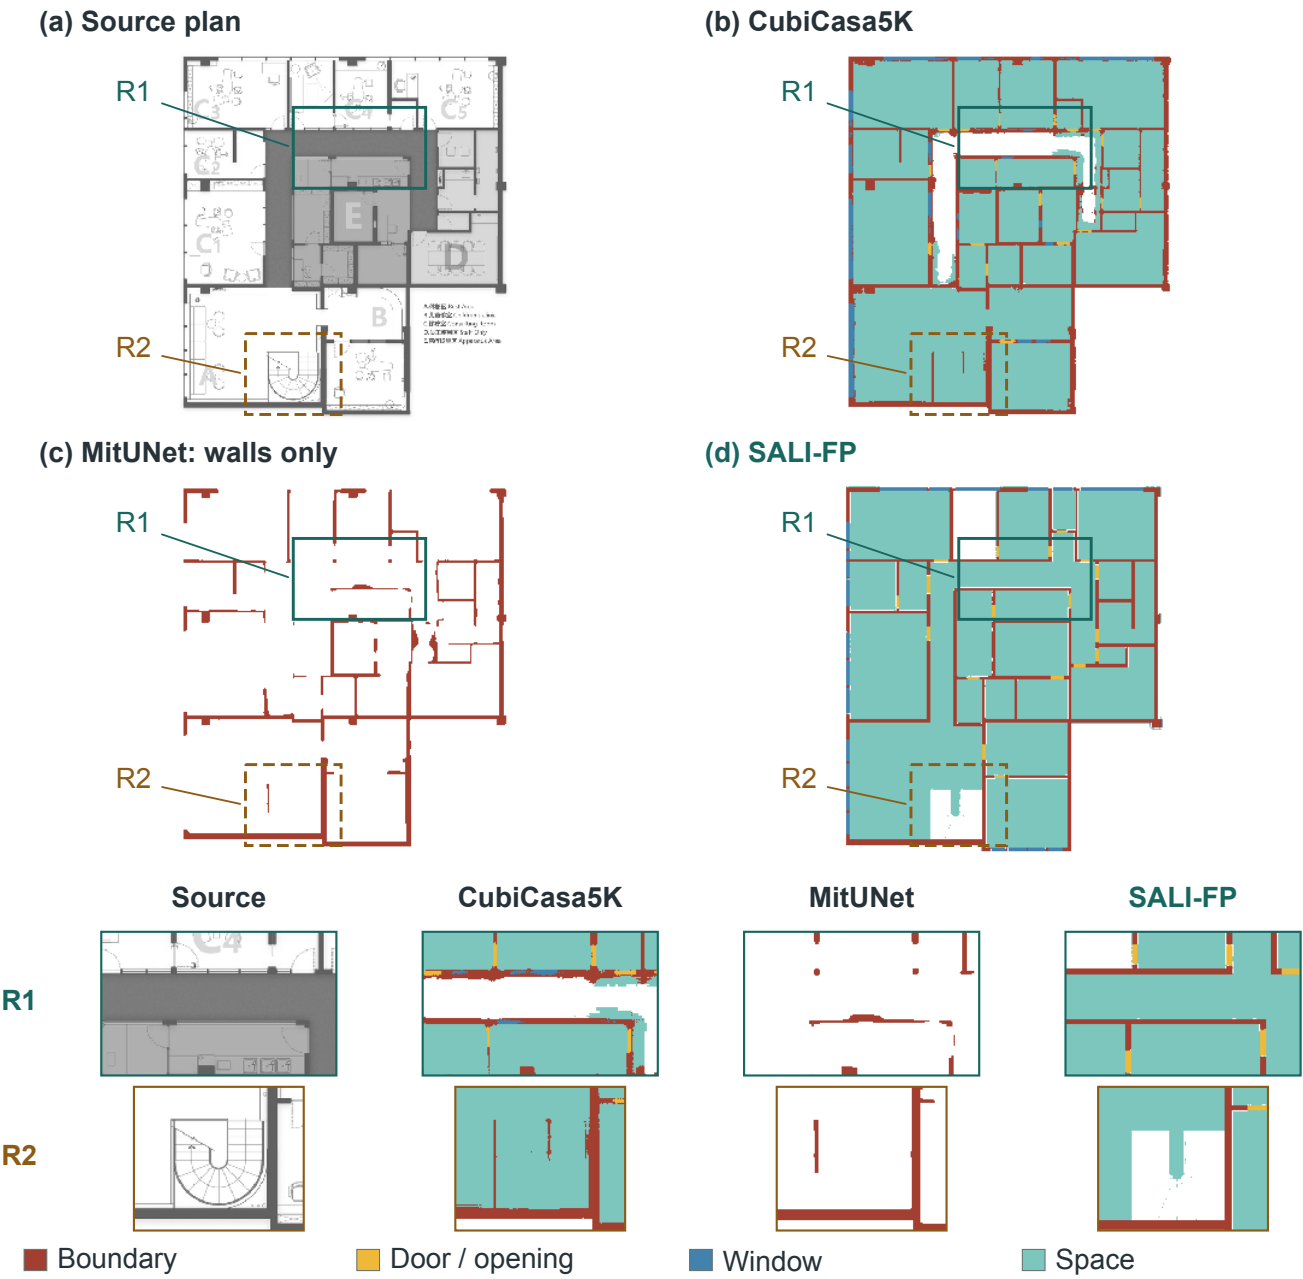

Overall comparison

SALI-FP retains the corridor around the clinic's central core more continuously than CubiCasa5K, which leaves much of that ring unfilled. MitUNet breaks several corridor and room boundaries. SALI-FP also keeps the small core compartments legible, but leaves an upper room blank and simplifies the curved lower stair, preventing an interpretation of uniformly improved recovery.

Region R1

Along the upper corridor, SALI-FP retains a continuous horizontal circulation band. CubiCasa5K produces a conspicuous blank strip, while MitUNet omits several enclosing segments. This location makes SALI-FP's improved circulation coverage visible without relying on agreement between its own representations.


Region R2

Around the lower stair, SALI-FP separates a white stair zone from the adjoining filled floor. CubiCasa5K partly fills that zone and adds internal fragments. SALI-FP does not preserve the original curved stair outline, so the retained exclusion is more convincing than the detailed shape.

SALI-FP output record

Internal RCR	0.9677
Shapes / control points	86 / 899
Invalid sparse polygons	4

Fig. F.19. archp10k_000646: a continuous clinic corridor around a dense core.

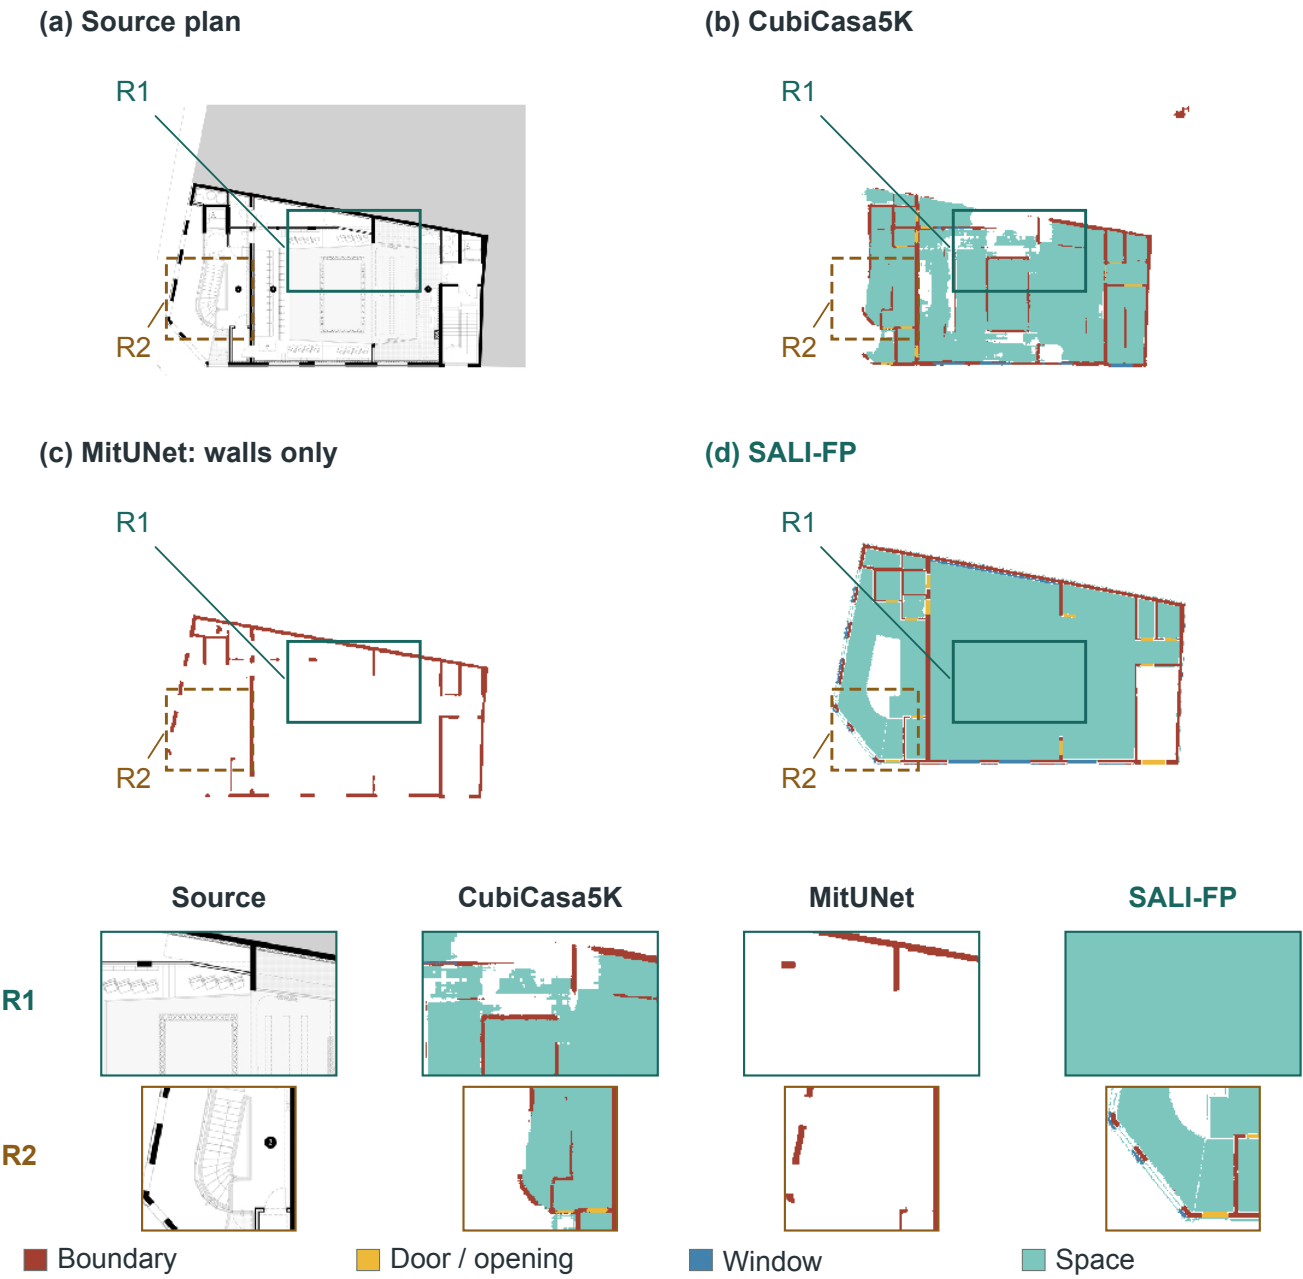

Overall comparison

SALI-FP gives the auditorium a more coherent interior than CubiCasa5K, which turns seating and central features into partitions and leaves patchy coverage. MitUNet retains the main sloping wall but only fragments of the remaining enclosure. SALI-FP substantially shifts and enlarges the footprint, so its suppression of interior clutter must be distinguished from geometric registration quality.

Region R1

CubiCasa5K encloses part of the central seating feature with structural-colored lines that are absent as full walls in the source. SALI-FP keeps the central area largely open. The displayed offset remains visible and precludes claiming a pixel-accurate reconstruction of this region.

Region R2

SALI-FP preserves a connected sloping facade and its lower change of direction, where CubiCasa5K is ragged and MitUNet has gaps. The shape is more coherent as an outline, but its position differs from the original and the curved interior feature is simplified.

SALI-FP output record

Internal RCR	0.9675
Shapes / control points	54 / 1,076
Invalid sparse polygons	6

Fig. F.20. archp10k_000626: seating interference in an oblique auditorium.

F.21 A narrow circulation spine and curved entry

archp10k_000671 | development



Overall comparison

SALI-FP retains the long interior organization and curved entrance of this narrow plan. CubiCasa5K fragments the adjoining circulation bands, while MitUNet produces an unusually thick right-hand structural strip and very little internal detail. SALI-FP provides a more usable spatial outline for inspection, but several furniture-like features become partitions and some curved entry geometry is regularized.

Region R1

Along the narrow upper spine, SALI-FP maintains continuous side bands around the central area. CubiCasa5K leaves irregular gaps and MitUNet largely omits the thin internal dividers. The distinction concerns connected spatial organization rather than verification of each furniture or counter boundary.


Region R2

The lower-left entrance retains its projecting outline and curved transition in SALI-FP. CubiCasa5K spreads ragged fill across this area, and MitUNet reduces it to isolated structural fragments. SALI-FP simplifies the rounded lower end, which remains visible against the original entrance geometry.

SALI-FP output record

Internal RCR	0.9484
Shapes / control points	85 / 947
Invalid sparse polygons	9

Fig. F.21. archp10k_000671: a narrow circulation spine and curved entry.

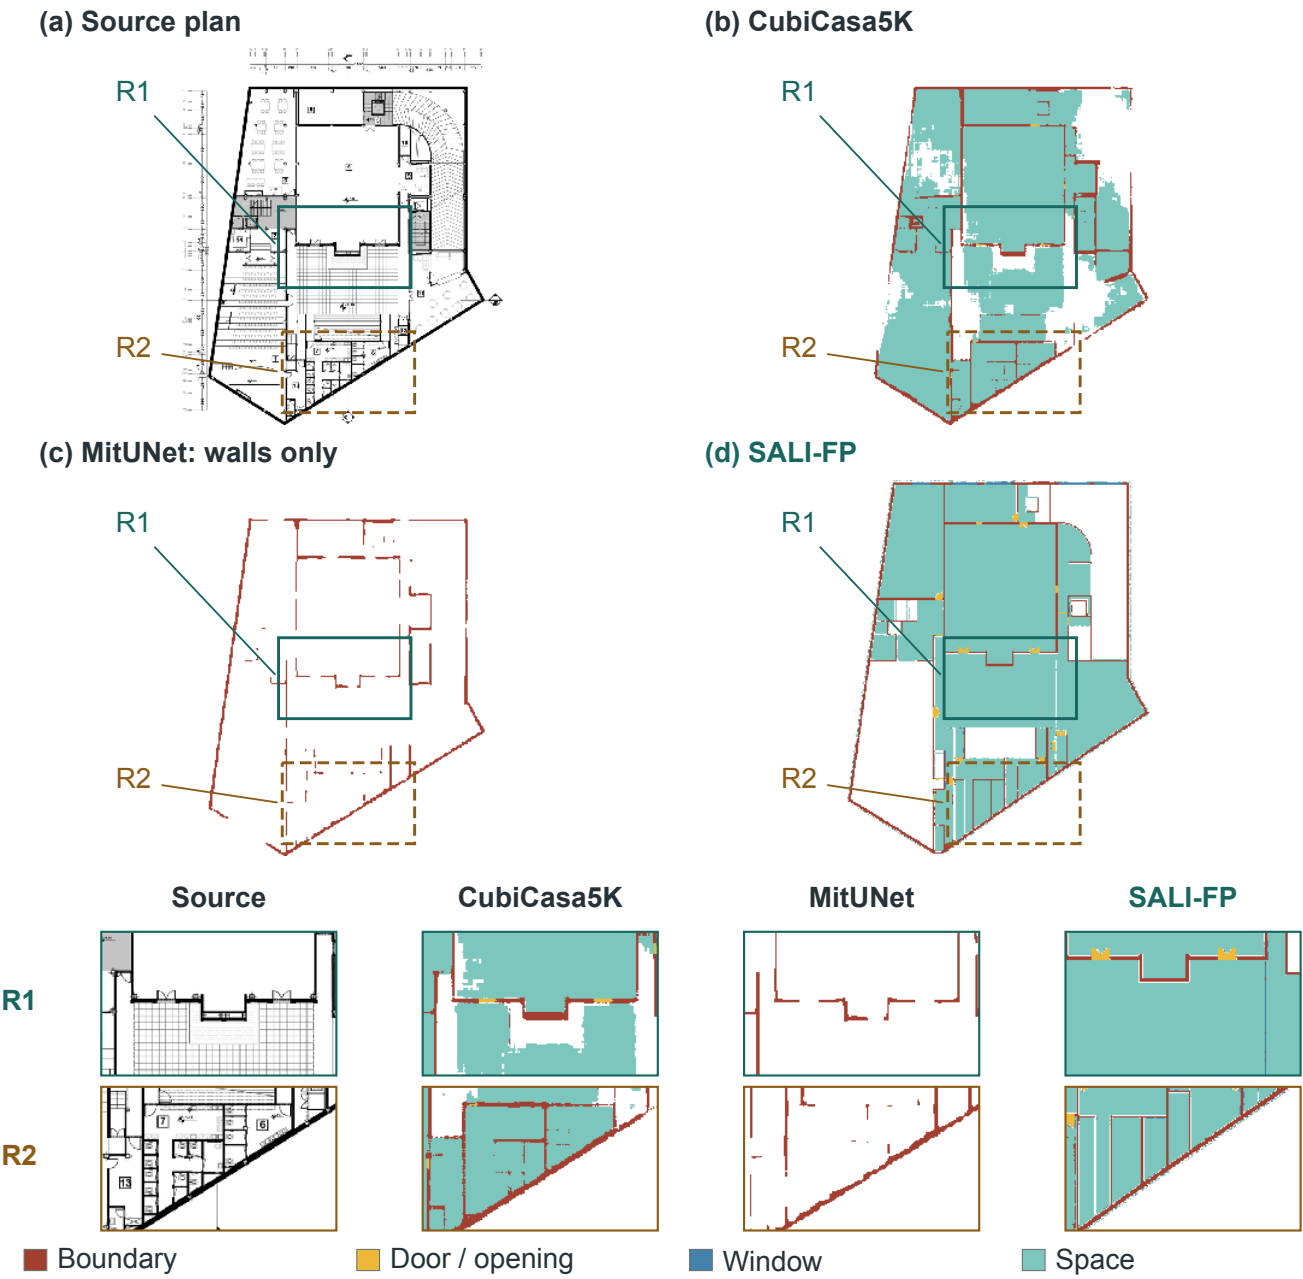

Overall comparison

SALI-FP retains the irregular envelope and the hall-to-lobby connection with more continuous spatial coverage than CubiCasa5K. MitUNet follows portions of the outline but leaves many internal junctions disconnected. The stair zones and lower service wing are more clearly separated in SALI-FP, although the footprint is shifted and several fine partitions remain simplified relative to the source.

Region R1

At the lower edge of the main hall, SALI-FP retains the projecting threshold and explicit entrances into the lobby. CubiCasa5K leaves patchy adjoining fill and poorly localized transitions. MitUNet breaks several segments around the same hall boundary, weakening its enclosure.


Region R2

The small rooms along the tapered lower edge remain more continuously divided in SALI-FP than in the baselines. CubiCasa5K merges some narrow compartments, and MitUNet leaves open wall ends. The displayed arrangement is simplified, not a verified instance-level reconstruction of every service room.

SALI-FP output record

Internal RCR	0.9581
Shapes / control points	70 / 1,374
Invalid sparse polygons	9

Fig. F.22. archp10k_000619: hall thresholds and a tapered service wing.

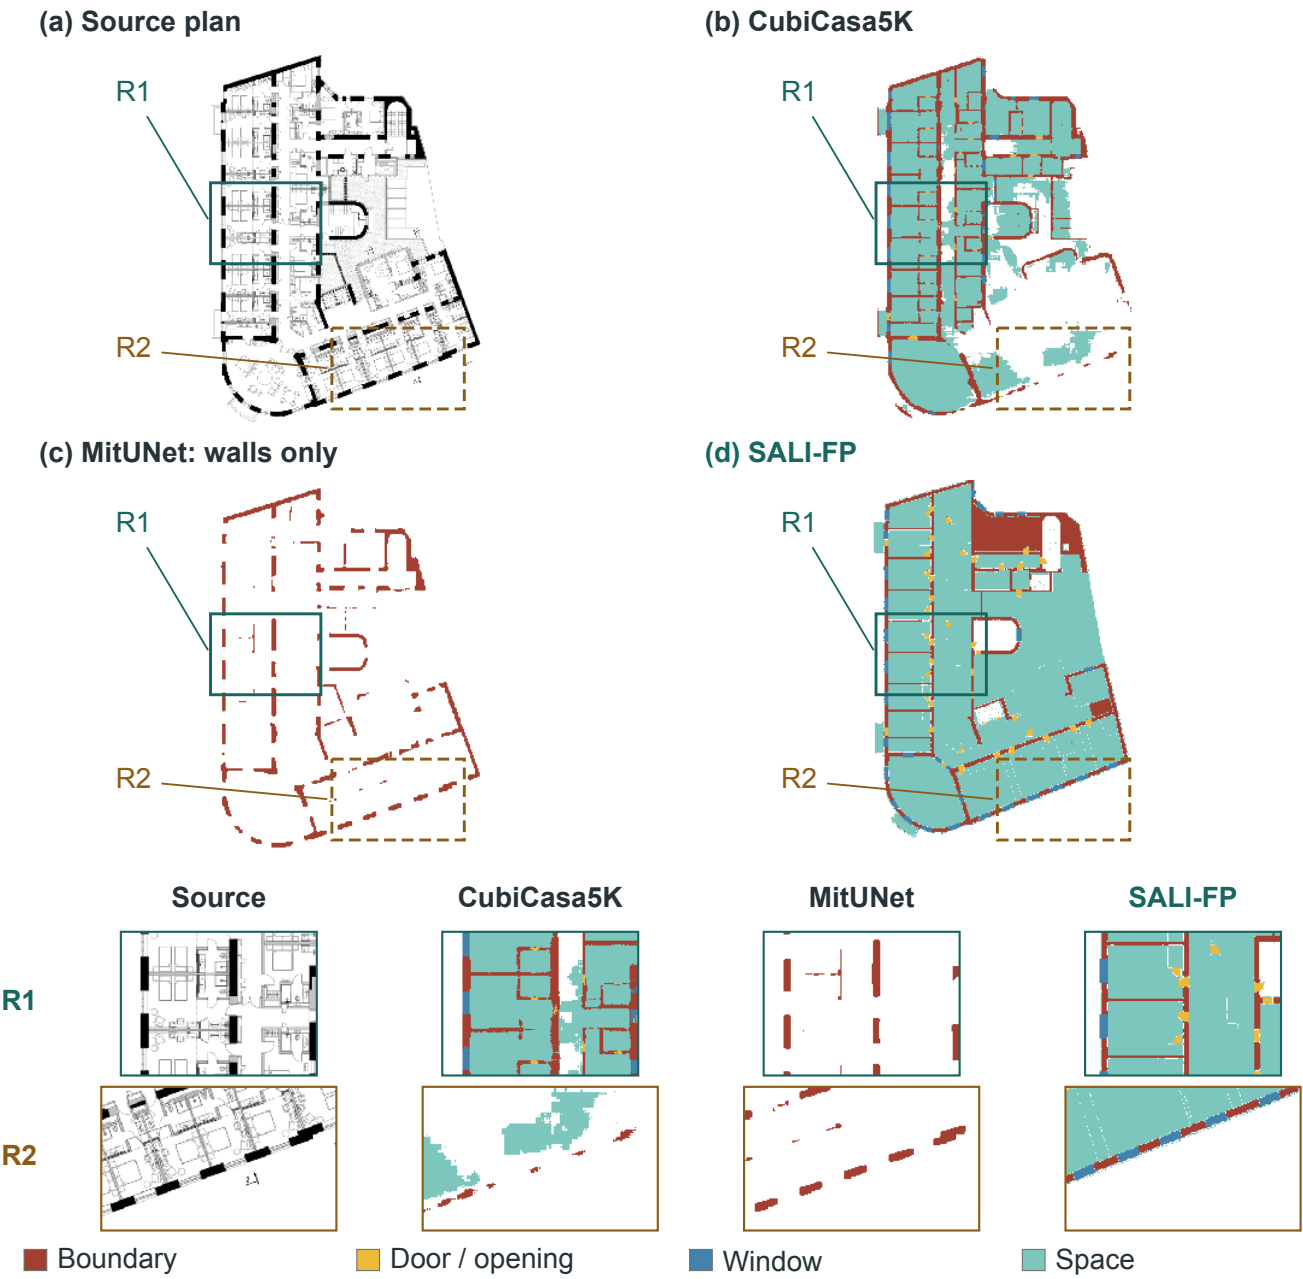

Overall comparison

SALI-FP retains the left room sequence and the lower diagonal wing that CubiCasa5K only partly fills. MitUNet detects scattered partitions but incompletely connects the repeated rooms. Important errors remain in SALI-FP: several central divisions disappear and an upper service block becomes a large structural-colored patch. Its clearer envelope should therefore be separated from room-level semantic correctness.

Region R1

Along the left row, SALI-FP shows repeated entrance markers connected to the central corridor. CubiCasa5K weakly distinguishes these transitions and leaves corridor gaps, while MitUNet fragments the room walls. Several small internal bathroom partitions are still absent from SALI-FP.

Region R2

SALI-FP preserves the lower diagonal outline and fills the room wing, whereas CubiCasa5K loses much of this area and MitUNet leaves disconnected facade segments. Some SALI-FP dividers are very faint or missing, so the benefit is wing recovery rather than complete room separation.

SALI-FP output record

Internal RCR	0.9501
Shapes / control points	144 / 2,115
Invalid sparse polygons	7

Fig. F.23. archp10k_000872: repeated hotel entrances and a diagonal lower wing.



Overall comparison

SALI-FP retains the paired-unit arrangement and a clearer stair exclusion than CubiCasa5K, which partly fills the stair core and adds isolated structural patches near furniture. MitUNet retains major wall segments but breaks several enclosure connections. SALI-FP also introduces small white cutouts and shifts parts of the facade, so the visual comparison does not establish better registration.

Region R1

The shared stair core forms a clearer unfilled region in SALI-FP. CubiCasa5K mixes spatial fill and a ragged gap through the core. MitUNet retains several surrounding walls but leaves disconnected ends. The stair outline in SALI-FP is simplified rather than tread-level geometry.

Region R2

Near the upper room's furniture, CubiCasa5K adds an isolated structural-colored patch. SALI-FP avoids that solid addition, but leaves a small white cutout instead. This is a localized reduction in false structure, not proof that the room has been recovered without error.

SALI-FP output record

Internal RCR	0.9696
Shapes / control points	33 / 434
Invalid sparse polygons	2

Fig. F.24. archp10k_000521: paired units around a common stair core.



Overall comparison

SALI-FP retains more entrance transitions and a clearer room sequence than CubiCasa5K or MitUNet. CubiCasa5K fills much of the planted surroundings, whereas MitUNet misses numerous enclosing segments. SALI-FP also has obvious residual errors: vegetation becomes colored speckles and circular window-like patches, and a small upper room becomes structural fill. These limit interpretation of its improved organization.

Region R1

At the upper meeting-room connection, SALI-FP retains a distinct opening between the room and the circulation strip. CubiCasa5K has a weaker threshold transition, and MitUNet leaves an incomplete enclosure. The neighboring planted area is not reliably classified by either semantic output.


Region R2

The lower room sequence shows clearer internal access markers in SALI-FP than in CubiCasa5K, while MitUNet leaves many partition ends disconnected. The improvement is local: the surrounding plant symbols and exterior fill still contain classification artifacts that are visible in the whole-plan view.

SALI-FP output record

Internal RCR	0.9512
Shapes / control points	80 / 1,824
Invalid sparse polygons	14

Fig. F.25. archp10k_000543: room thresholds beside planted outdoor spaces.

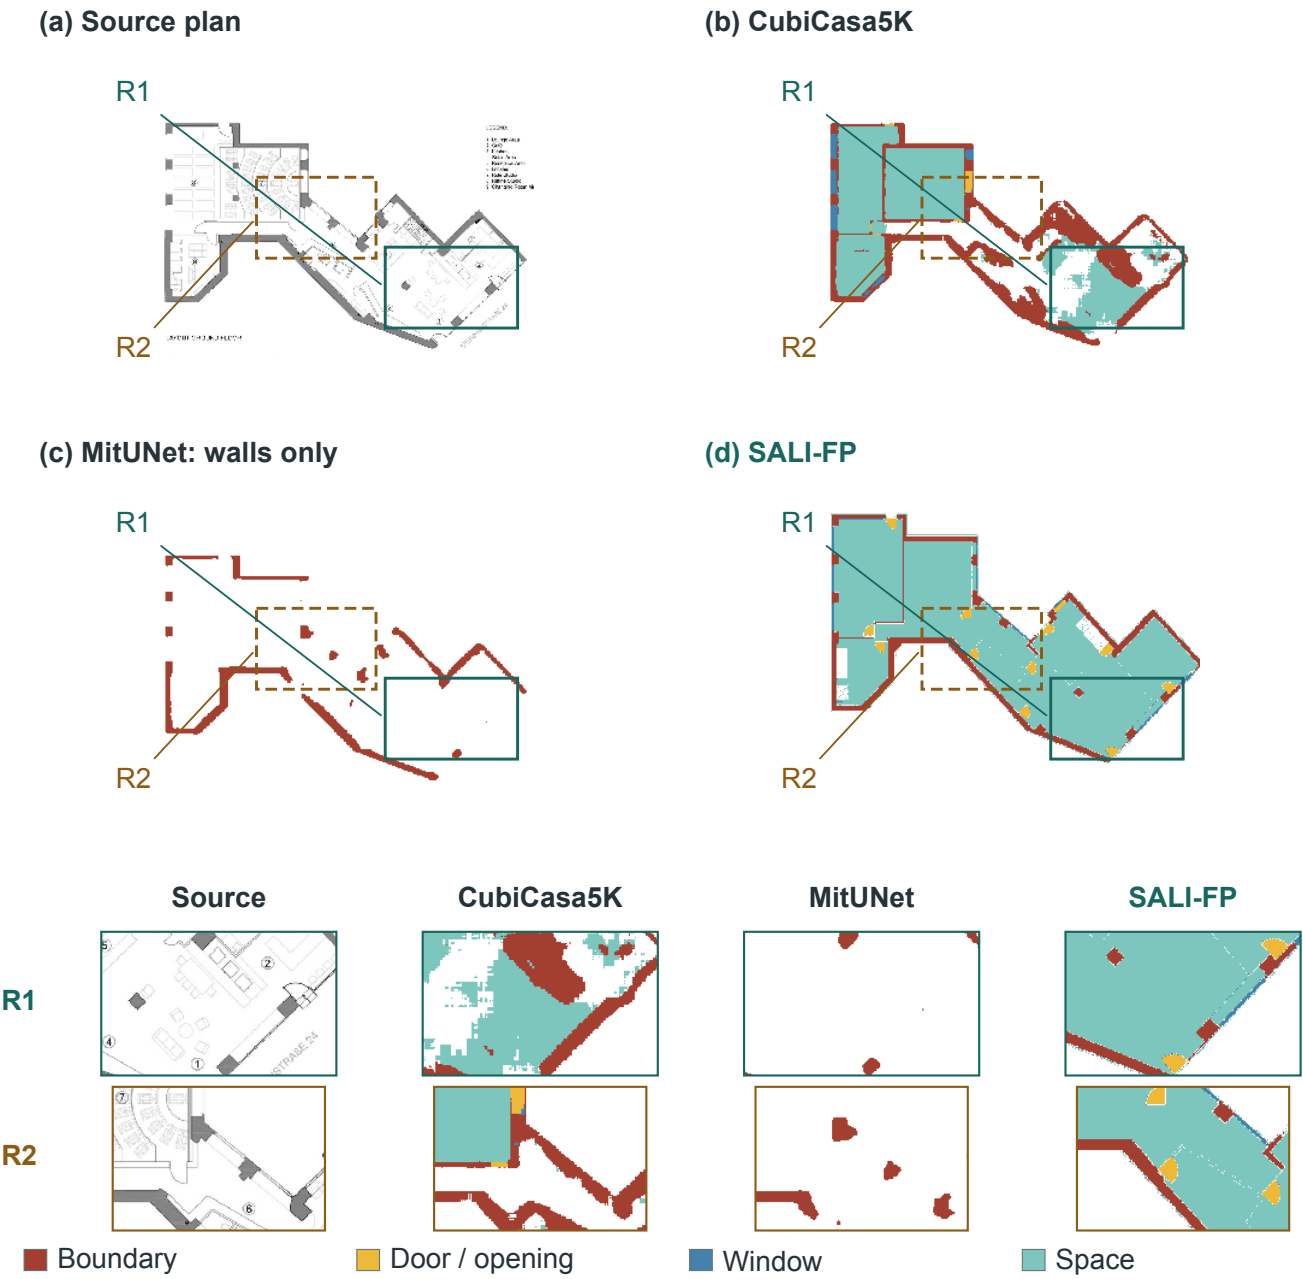

Overall comparison

SALI-FP preserves the connection between the rectangular activity rooms and the oblique retail wing. CubiCasa5K introduces thick structural patches and fragmented fill in the oblique half; MitUNet loses many facade links and internal transitions. SALI-FP retains the principal access points, but shifts the geometry and simplifies several service compartments, so detailed positional agreement remains unresolved.

Region R1

The oblique retail wing remains continuously filled and bounded in SALI-FP. CubiCasa5K produces large irregular wall patches within the open area, while MitUNet retains disconnected structural pieces. The SALI-FP result better separates the envelope from furniture-rich interior linework, despite a visible offset.

Region R2

At the narrow connection between the wings, SALI-FP preserves the change of direction and distinct opening markers. CubiCasa5K thickens the transition and loses nearby spatial coverage. MitUNet breaks the facade connections, making the continuity of the route less apparent.

SALI-FP output record

Internal RCR	0.9526
Shapes / control points	53 / 908
Invalid sparse polygons	5

Fig. F.26. archp10k_000618: connected oblique retail and activity wings.



Overall comparison

Both semantic methods retain the large workspaces more clearly than MitUNet's fragmented wall output. SALI-FP gives cleaner facade segments, but fails substantially in the connecting core: a broad interior strip becomes structural-colored fill. CubiCasa5K better preserves several central compartments. This case supports localized facade observations, not a general claim that SALI-FP is the strongest method throughout.

Region R1

SALI-FP keeps the upper workspace bounded with continuous facade segments where MitUNet misses most of the enclosure. CubiCasa5K also covers the workspace well and is a close comparator here. The planted strip at the top remains semantically ambiguous in both outputs.


Region R2

Along the lower workspace frontage, SALI-FP retains an extended window-colored segment and a connected outline. CubiCasa5K thickens parts of this edge, while MitUNet leaves gaps. This local improvement does not offset the conspicuous structural misclassification in SALI-FP's central connecting strip.

SALI-FP output record

Internal RCR	0.9601
Shapes / control points	50 / 826
Invalid sparse polygons	6

Fig. F.27. archp10k_000848: workspace envelopes with a misclassified central strip.

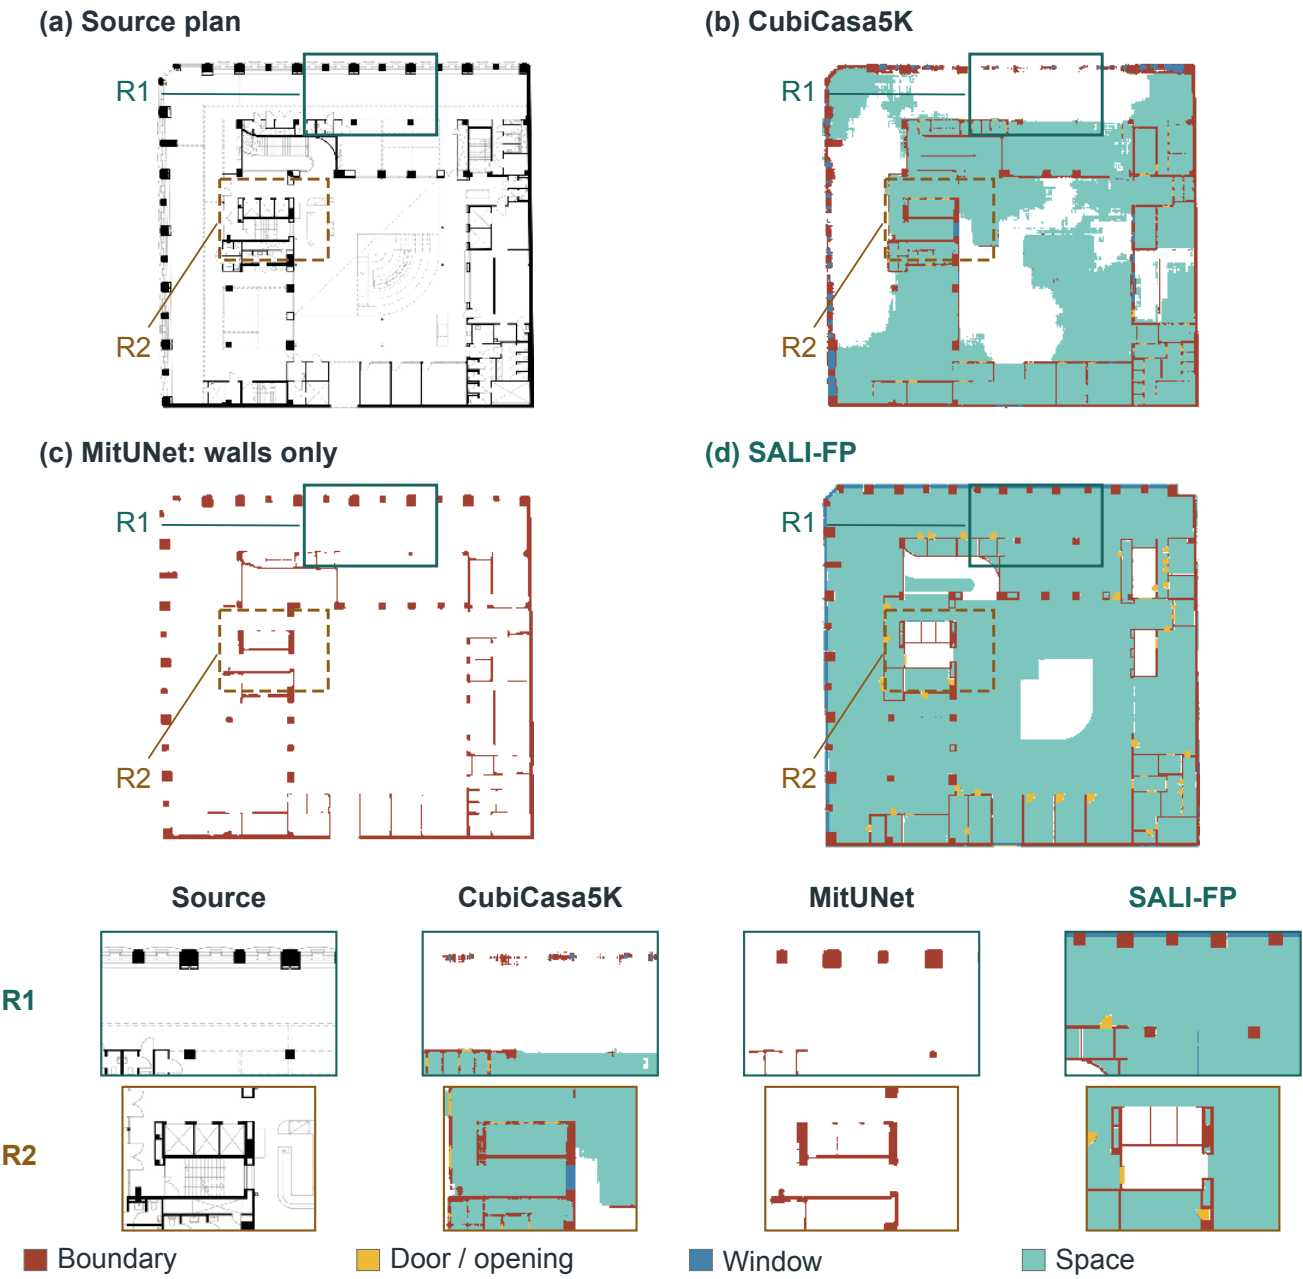

Overall comparison

SALI-FP retains continuous open-floor coverage and distinct service cores in this large mixed-use plan. CubiCasa5K leaves extensive blank zones and merges portions of the cores, while MitUNet captures piers and some walls without complete connections. SALI-FP also simplifies the central stepped feature into a white cutout, so its strong spatial coverage does not establish the correctness of every void.

Region R1

Along the upper perimeter, SALI-FP connects the circulation strip while preserving alternating piers and window-colored spans. CubiCasa5K leaves a broad unfilled band. MitUNet detects isolated piers but omits many links, making the enclosing frontage less continuous in its wall-only representation.


Region R2

At the left service core, SALI-FP separates shaft-like white regions from adjacent filled rooms and marks their access points. CubiCasa5K fills or merges several of these subdivisions, while MitUNet breaks the small partitions. The precise function of each white region still requires source-level verification.

SALI-FP output record

Internal RCR	0.9627
Shapes / control points	184 / 2,234
Invalid sparse polygons	12

Fig. F.28. archp10k_000694: open-floor coverage around multiple service cores.

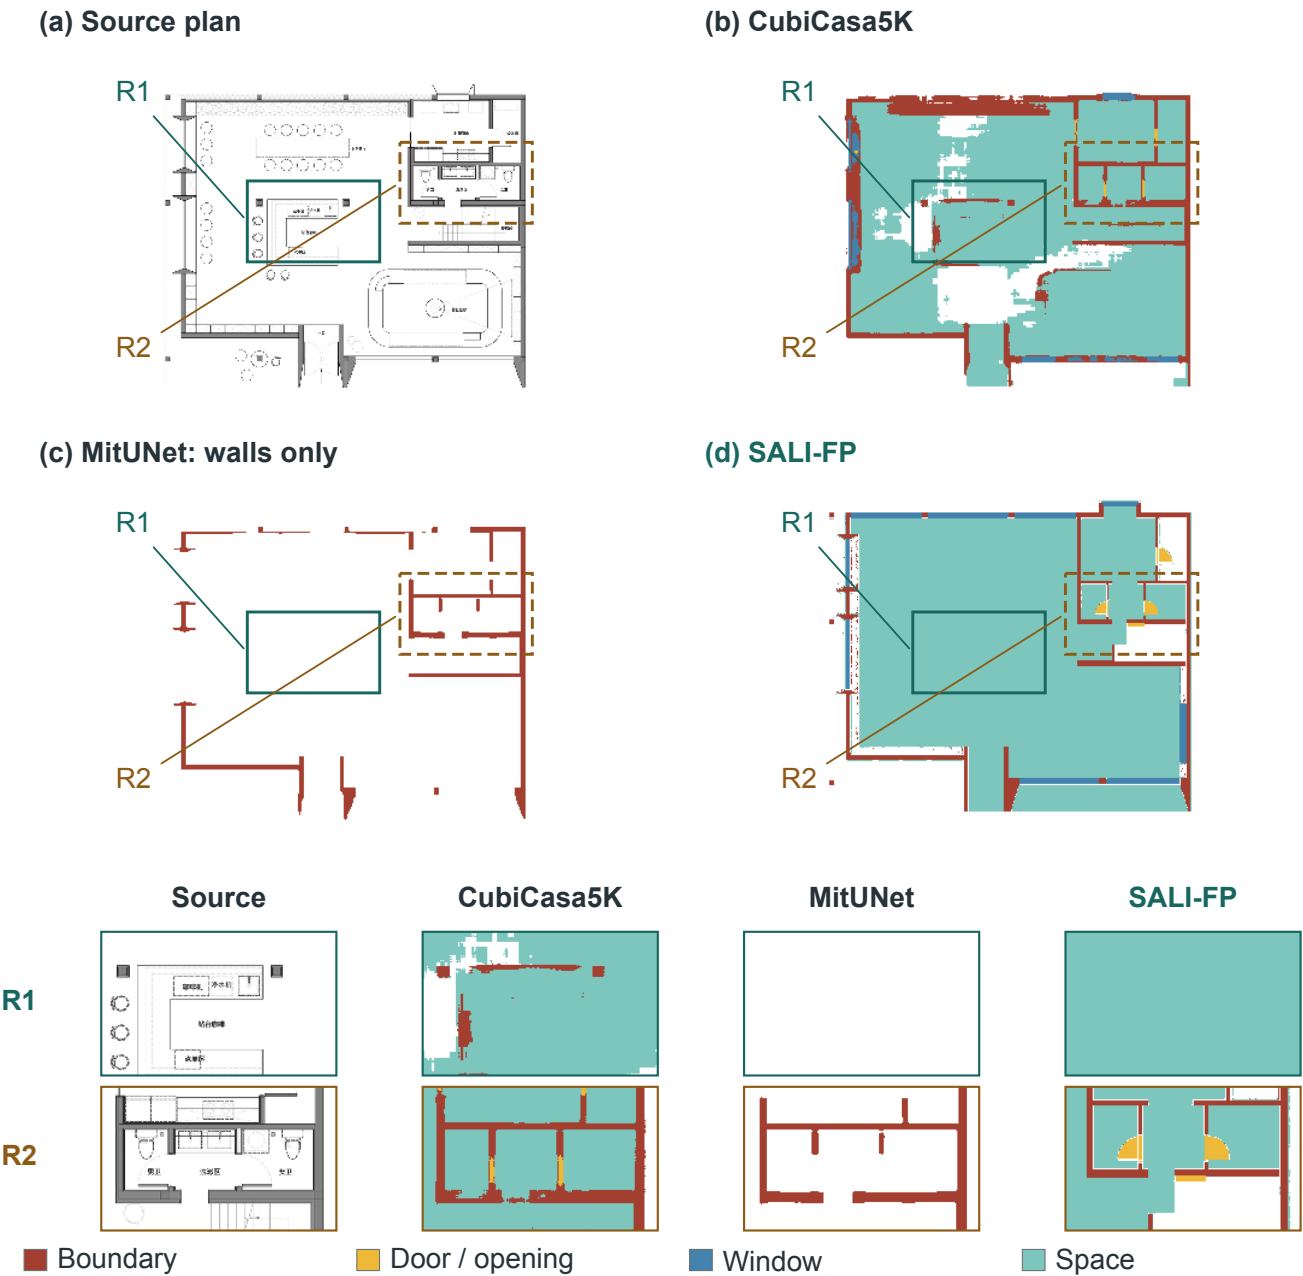

Overall comparison

SALI-FP preserves the open hall without many furniture-related structural fragments introduced by CubiCasa5K. MitUNet retains parts of the envelope and service walls but leaves substantial gaps. SALI-FP makes service accesses more explicit, yet fills the lower exterior strip and loses several fixtures; its advantage is clutter suppression rather than complete functional interpretation.

Region R1

Around the central counter and seating group, CubiCasa5K produces isolated structural lines and gaps in the surrounding floor. SALI-FP keeps the hall largely continuous. This reduces visible furniture interference, although low counters and partial-height partitions cannot be verified from the shared labels alone.


Region R2

SALI-FP marks the small upper-right service entrances more distinctly than CubiCasa5K's broad boundary transitions. MitUNet keeps some enclosing walls but leaves incomplete junctions. The positions are not identical to the source, and the adjacent stair or equipment regions remain simplified.

SALI-FP output record

Internal RCR	0.9721
Shapes / control points	64 / 1,359
Invalid sparse polygons	18

Fig. F.29. archp10k_000702: furniture-rich hall and compact service entrances.

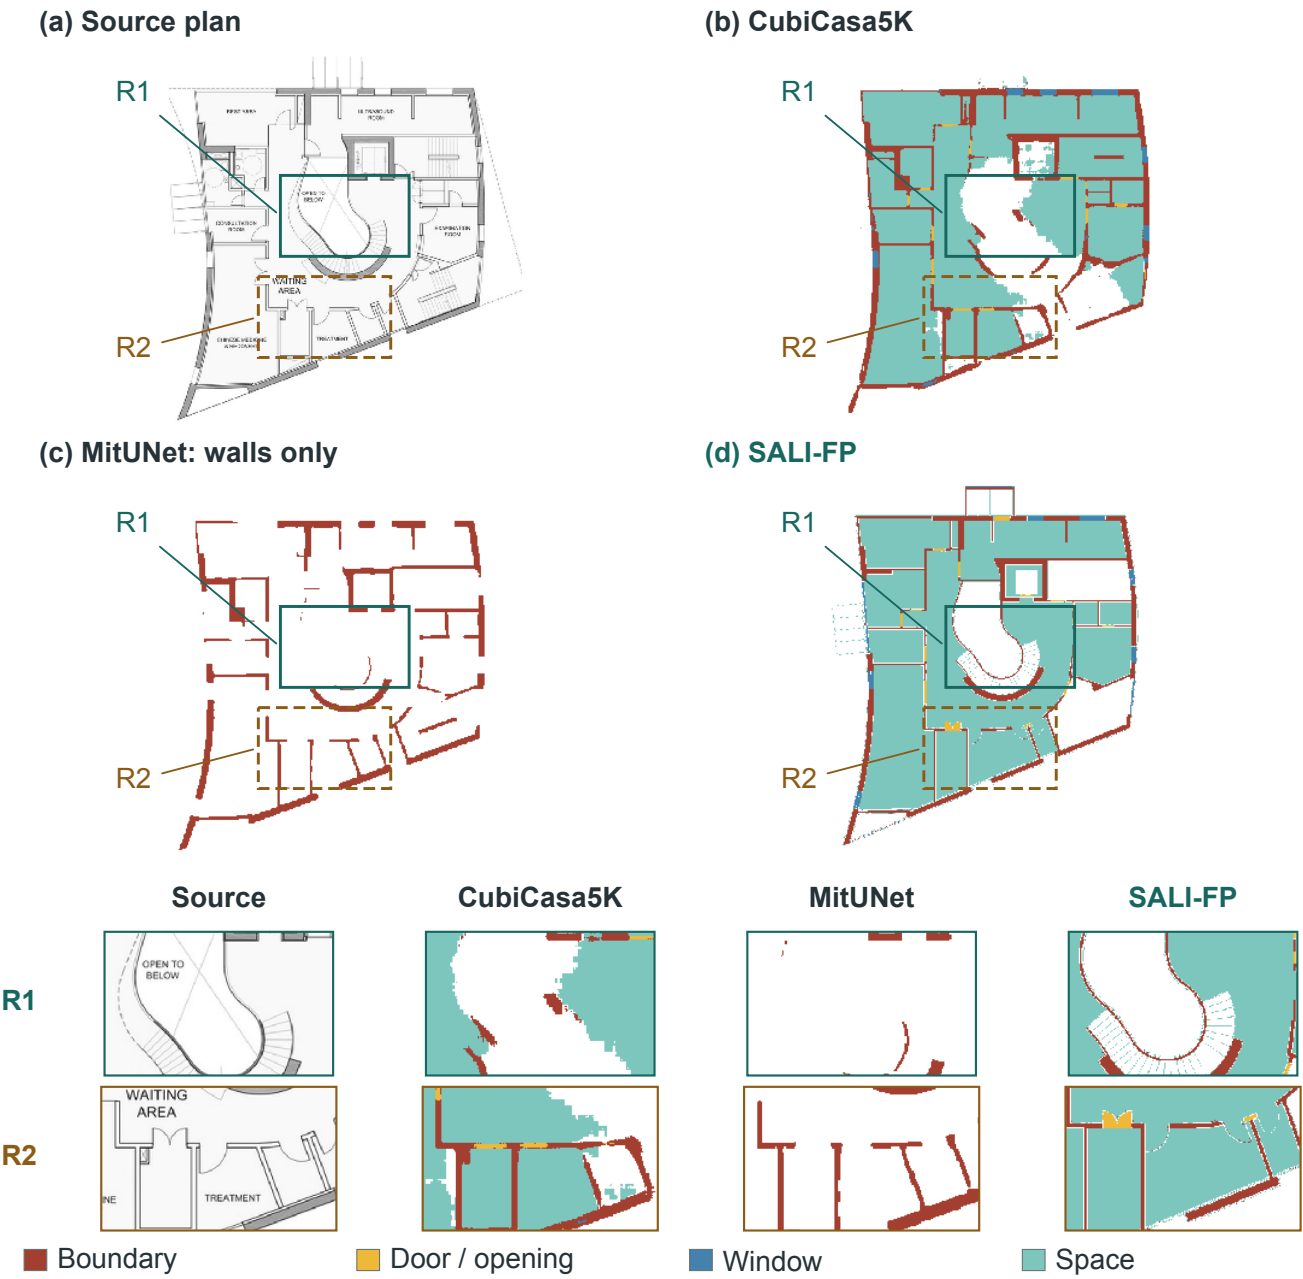

Overall comparison

SALI-FP retains the curved central opening and surrounding waiting circulation more coherently than CubiCasa5K, which fragments both the void boundary and nearby fill. MitUNet captures portions of the curve but leaves the adjoining rooms disconnected. SALI-FP still simplifies the lower-right bays and several small partitions, so its strongest evidence is preservation of the principal atrium-circulation relationship.

Region R1

The central opening labeled open to below remains a coherent white region in SALI-FP. CubiCasa5K produces an irregular void and broken surrounding coverage, whereas MitUNet leaves part of the curve detached. SALI-FP retains the continuous relationship between the curve and the waiting area.

Region R2

Along the lower waiting-room edge, SALI-FP connects the circulation band to several distinct door openings. CubiCasa5K loses substantial fill near the angled rooms, and MitUNet leaves disconnected partitions. SALI-FP retains the principal access arrangement while still simplifying small treatment-room boundaries.

SALI-FP output record

Internal RCR	0.9540
Shapes / control points	65 / 1,673
Invalid sparse polygons	7

Fig. F.30. archp10k_000587: curved atrium and connected waiting circulation.