

Annual Earth-observation embeddings encode wildfire disturbance and support simplified burned area mapping

Jovana Knezevic^{1,2,3*}, Clement Atzberger⁴, Zhengpeng Feng³, Adam F. A. Pellegrini⁵, Srinivasan Keshav^{1,3}, and David Coomes^{1,2,3*}

¹Conservation Research Institute, University of Cambridge, Cambridge, United Kingdom.

²Department of Plant Sciences, University of Cambridge, Cambridge, United Kingdom.

³Department of Computer Science and Technology, University of Cambridge, Cambridge, United Kingdom.

⁴Climate Labs, New York, US.

⁵Department of Earth System Science, Stanford University, Stanford, CA, USA.

*Address correspondence to: jk871@cam.ac.uk and dac18@cam.ac.uk

Abstract

Medium-resolution (10–30 m) burned area mapping is vital for monitoring wildfires and their impacts, but remains difficult to scale. Existing methods require either curated fire-specific imagery or dense time-series analysis. Here, we tested whether annual Earth-observation embeddings retain wildfire disturbance signals sufficiently to map burned areas without either requirement. Using Tessera and AlphaEarth embeddings, we tested individual burn-scar delineation, mapping of all same-year fires within an area, regional wall-to-wall mapping, cross-continental transfer, and intra-annual fire timing. Tessera strongly encoded wildfire disturbance, allowing even linear models to separate burned from unburned pixels; the signal was weaker in AlphaEarth. Models trained on a single Tessera embedding matched or exceeded equivalent models using paired pre- and post-fire HLS imagery, and outperformed post-fire imagery alone. The same approach mapped all same-year fires within benchmark scenes ($F1 = 0.90$). Applied across California, with no California fire data used for downstream training, it recovered 97% of reference burned area and detected substantially more small and medium-sized fires than GABAM or MCD64A1. Separately, a model trained on 2018–2021 US fires transferred without retraining to 88 European fires from 2024–2025 ($F1 = 0.88$). For well-detected fires, ignition timing was recovered with a mean absolute error of 13 days. Performance declined for fires ignited near the end of the calendar year, and wall-to-wall deployment produced systematic false positives in some unseen landscapes. Annual embeddings nevertheless achieve high segmentation accuracy while moving the burden of dense time series processing upstream, providing a

promising path towards simpler regional burned area mapping.

1 Introduction

Accurate mapping of burned areas provides a foundation for evaluating the impacts of fires on local, regional and global landscapes (Mouillot et al., 2014). Satellite data enable burned areas to be mapped over large scales, and these products are used to characterize changes in fire regimes (Andela et al., 2017), assess post-fire vegetation recovery (Nolè et al., 2022), quantify carbon emissions caused by fires (van der Werf et al., 2017), and estimate wildfire exposure and hazard (Chen et al., 2024; Shah et al., 2022; Verde and Zêzere, 2010). Yet current global burned area products are produced at relatively coarse spatial resolution, from 250–500 m raster products (Giglio et al., 2025, 2018) to 0.25° gridded datasets (Earth Science Data Systems, 2025). At these scales, fire perimeters cannot be resolved in detail (Humber et al., 2020; Hall et al., 2016), small fires are systematically omitted (Ramo et al., 2021; Fornacca et al., 2025; Boschetti et al., 2019), and accuracy deteriorates in fragmented landscapes (Laris, 2005; Rodrigues et al., 2019; Boschetti et al., 2019). Small islands of unburned vegetation, which act as ecologically important refuges and seed sources for post-fire recovery, are also far below the resolution of coarse products (Coop et al., 2019). Reflecting these limitations, a recent review identified the need to develop 10–30 m (i.e. decametric) products (Radeloff et al., 2024). Decametric resolution improves burned area and fire emission estimates (Ramo et al., 2021; Qi et al., 2024), captures heterogeneous burning regimes (Liu et al., 2018), and maps burned areas in greater spatial detail (Roy et al., 2019) and in closer agreement with high-resolution reference imagery (Stroppiana et al., 2025). Global Annual Burned Area Map (GABAM), a 30 m Landsat-derived product, remains the only global burned area map at decametric resolution (Long et al., 2019), and analyses based on it have shown that finer resolution substantially increases the detection of small fires missed by coarser products (Fornacca et al., 2025; Qi et al., 2024). Sentinel-1 and Sentinel-2 offer higher spatial and temporal resolution than Landsat and have shown considerable promise for burned area mapping in regional studies (Roteta et al., 2019; Ramo et al., 2021; Verhegghen et al., 2016; Gaveau et al., 2021; Deshpande et al., 2022), yet no global burned area product based on these sensors currently exists.

Existing burned area mapping approaches can be viewed as addressing two related but distinct tasks: delineating known fire events and discovering all burned area across a region. **Event-based** approaches map the burned area of individual, known fires from curated post-fire satellite images that contain the visible burn scar. Deep learning models achieve high segmentation accuracies in event-based studies, producing maps at 10 m resolution. These approaches work well with single post-fire images as training data (Seydi et al., 2022; Hu et al., 2021; Fu et al., 2024; Knopp et al., 2020; Sdraka et al., 2024), and even better when pre- and post-fire image pairs are available (Sui et al., 2024; Liu et al., 2026b; Sdraka et al., 2024). This accuracy, however, rests on substantial task-specific data curation. For each fire, one must identify the fire timing, select suitable pre- and post-fire imagery and choose an adequate post-fire timing window: after the fire has been contained, but before the disturbance signal has substantially diminished. Because deep learning models are data-demanding, the best approaches spend significant effort constructing large collections of such

curated fire-specific images for training (Liu et al., 2026b; Sdraka et al., 2024). The same curation is required again at inference: a model cannot be applied to a new fire without a suitable post-fire image being supplied first. As a result, event-based approaches achieve excellent burn scar delineation, but are difficult to scale operationally, as the temporal localization burden is hidden inside the data curation. **Region-based approaches** aim to detect and delineate all burned area across a landscape within a given period, without prior knowledge of individual fires’ locations or occurrence times. Typically, this requires searching large volumes of repeated satellite observations across space and time, in which most observations contain no burned area at all. Sifting through entire time series is data-intensive and computationally expensive, significantly so at higher spatial resolutions, and every operational product limits this cost in some way, trading off spatial resolution, temporal resolution, and model complexity. MODIS MCD64A1 and VIIRS VNP64A1 accomplish wall-to-wall temporal change detection, sliding two adjacent pre- and post-change windows through the entire valid observation time series of each pixel, by operating at a hectometric resolution of 500 m (Giglio et al., 2018, 2025). FireCCI50, at 250 m, instead narrows the search using the MODIS active fire product, only examining 1 km grid cells in which a hotspot was detected (Chuvieco et al., 2018). GABAM operates at a finer 30 m resolution, but pays for it elsewhere: temporal resolution drops to Landsat’s 16-day revisit interval compared to MODIS’s daily, and the per-pixel model is a small Random Forest run on each valid Landsat observation (Long et al., 2019). Even the most recent integration of deep learning into operational mapping confirms this cost structure. Liu et al, for example, propose a two-stage pipeline in which a random forest first searches Sentinel-2 observations for candidate burned areas, and only the downloaded candidate regions are passed to a large dual-temporal deep network (Liu et al., 2026b).

A comparison of event-based and region-based approaches exposes a central tension: accurate burned area delineation is achievable when fire location and timing are already known, but regional mapping must first discover those events by processing observations across both space and time. Thus, while a global 10 m burned area product would meet a well-documented need (Radeloff et al., 2024), the wall-to-wall dense temporal search required to produce one remains computationally and operationally demanding. This paper evaluates whether the rapidly advancing field of geospatial foundation modelling provides opportunities to generate global 10-m annual-resolution burned area products, bridging the divide between current approaches.

Geospatial foundation models (GFMs) have recently emerged as a new technology that promises to simplify and scale traditional remote sensing workflows (Klemmer et al., 2025). GFMs are large machine learning models, pre-trained on vast amounts of multi-modal remote sensing data through self-supervised learning, producing learned representations that can support a variety of geospatial tasks. Their main promise is plug-and-play ease of use and scalability, alleviating the burden of cloud masking, data processing, and task-specific feature construction. A subset of GFMs, including Tessera (Feng et al., 2026a) and AlphaEarth (Brown et al., 2025), are temporal models: they summarize a whole year of satellite data into precomputed, multi-dimensional vectors, called embeddings. These spectral-temporal embeddings offer a different way to work with dense satellite time series: rather than explicitly searching through raw observations, the temporal reasoning is performed once, upstream, when the representation is generated. If wildfire disturbance information

is adequately captured by this summarization, the dense temporal search at the heart of region-based mapping could be replaced by reading the disturbance out of a single annual representation. To what extent that information is retained remains an open question: temporal embeddings have so far been validated mostly on undisturbed landscape properties such as land cover, crop type, and vegetation structure (Ball et al., 2026; Liu et al., 2026a; van der Plas et al., 2026; Ma et al., 2026), with initial assessments of burned area mapping only recently appearing (Seydi, 2025; Silva and Gonçalves, 2026). It remains unclear whether annual embeddings can support the full burned area mapping problem: delineating entire burn scars from a single annual embedding, discovering all fires across a landscape, and retrieving when they occurred. It is also unclear whether this capability depends on how the embeddings are constructed, since models differ in sensors, architectures, and training objectives.

In this study, we treated annual embeddings from two foundation models, Tessera and AlphaEarth, as inputs to lightweight downstream models, asking whether a single-year embedding can map where fires burned without being told where and when they occurred. We focused our contributions around the following questions.

1. Is wildfire disturbance encoded within annual embeddings, and readily extractable?
2. Can annual embeddings match the event-based setting, delineating individual burn scars without curated post-fire imagery?
3. Can embeddings support the region-based setting, mapping all burned area across a landscape, including application to an unseen region and transfer across continents (i.e. zero-shot modelling)?
4. Can embeddings recover sub-annual fire timing?

Throughout, we examined where and why embedding-based approaches fail. We addressed these questions using the HLS Burn Scars benchmark across the continental United States (2018–2021), a statewide wall-to-wall deployment in California, and 88 European fires from 2024–2025. Our results show that annual embeddings can support all four tasks, with Tessera consistently outperforming AlphaEarth in settings where the two representations were directly compared. Embedding-based workflows mapped burned area directly from the annual embedding, without event-specific imagery, dense time-series processing, or explicit comparison of pre- and post-event periods. Because much of the temporal processing is shifted upstream into a reusable representation, the downstream workflow is substantially simpler, offering a path towards more scalable medium-resolution burned area mapping.

2 Datasets

2.1 Annual embeddings from Tessera and AlphaEarth

We used annual precomputed temporal embeddings from Tessera and AlphaEarth as fixed inputs for burned area segmentation and fire timing. The embedding models were not fine-tuned; all supervised

classifiers and segmentation models trained on top of embeddings are referred to as downstream models. We focused primarily on Tessera, using AlphaEarth as a complementary comparison.

Tessera is a GFM that provides publicly available annual embeddings (Feng et al., 2026a). It was trained on globally distributed time series of Sentinel-1 and Sentinel-2 data to produce embeddings that are robust to missing and cloudy observations (Lisaius et al., 2024). Each embedding is a 128-dimensional unnormalized vector that represents a spectro-temporal summary of one calendar year for a 10×10 m pixel. We used Tessera V1 annual embeddings for 2017–2025, downloaded through the geotessera library (<https://github.com/ucam-eo/geotessera>).

AlphaEarth also provides precomputed annual embeddings at 10 m resolution (Brown et al., 2025). AlphaEarth was trained on Sentinel-1, Sentinel-2 and Landsat data, while also using other data sources as prediction targets, including lidar, elevation, climate, land cover and text from Wikipedia (Brown et al., 2025). It produces 64-dimensional unit-norm embeddings. Unlike pixel-level Tessera, AlphaEarth is trained on image patches, so each pixel embedding incorporates surrounding spatial context at approximately kilometre scale. The v1 embeddings were downloaded from the Taylor Geospatial Cloud-Optimized GeoTIFF mirror on Source Cooperative (<https://source.coop/tge-labs/aef>).

The precomputed products from both models summarize a calendar year (1 January–31 December). We denote E_0 for fire year embeddings, the calendar year in which the target fire ignition occurred; E_{-1} for embeddings from the year preceding fire, and E_{+1} for embeddings from the year following the fire.

2.2 Continental United States dataset

HLS Burn Scars benchmark. To compare annual embeddings with an event-based workflow, we used the Harmonized Landsat and Sentinel-2 (HLS) Burn Scars benchmark (Phillips et al., 2023). It contains 804 chips (512×512-pixel image tiles covering 15×15 km at 30 m resolution), each centered on a fire event and paired with a post-fire HLS image and a burned area mask derived from Monitoring Trends in Burn Severity (MTBS). Post-fire images were acquired 1–3 months after ignition, selected for <10% cloud cover, and visually checked for the presence of the burn scar (Jakubik et al., 2023). Depending on the size of the fire, the chips may only capture part of the event.

Supplementing the HLS Burn Scars database with pre-fire imagery. To create the paired pre/post baseline, we generated pre-fire composites from HLS Sentinel-2 (S30) v2.0 surface reflectance (Neigh et al., 2021; Ju et al., 2025), obtained through Google Earth Engine (GEE). Observations were drawn from the 30 days preceding MTBS ignition, extended to 60 days when valid coverage remained below 95%. Cloud, shadow, and snow were masked, and valid observations were combined using a temporally weighted medoid. Full compositing and missing-data procedures are provided in Section S1 of the Supplementary Material.

MTBS reference data and label refinement. We used fire perimeters, severity maps, and ignition dates from MTBS to refine benchmark burned area masks and construct masks for annual-fire

evaluation (Eidenshink et al., 2007). MTBS maps large US fires ($>\sim 400$ ha for the western US and $>\sim 200$ ha in the eastern US) at 30 m resolution using Landsat imagery and expert review (Eidenshink et al., 2007). We accessed two MTBS products through GEE: Burned Area Boundaries (USFS/GTAC/MTBS/burned_area_boundaries/v1) and Annual Burn Severity Mosaics (USFS/GTAC/MTBS/annual_burn_severity_mosaics/v1) (USDA Forest Service and U.S. Geological Survey). Ignition dates were used as event dates in timing analyses.

Because MTBS perimeters may contain unburned or spectrally ambiguous areas, we reconstructed the HLS Burn Scars labels using the corresponding MTBS severity mosaics. Classes 2–4 (low, moderate, and high severity) were treated as burned, while classes 0, 1, and 5 (unburned, unburned to low severity, and increased greenness) were treated as unburned, consistent with previous studies (Shi et al., 2018; Hu et al., 2023). Examples are shown in Figure S1. Compatible severity masks could not be constructed for 11 chips, leaving 793 chips for subsequent analyses unless otherwise stated.

Each benchmark chip was constructed around a single target fire, but could also intersect additional fires that occurred during the same calendar year. These additional fires are relevant for annual embeddings, which summarize the full calendar year and may encode any fire that occurred during that time. We therefore distinguished the original target fire from the union of all same-year fires intersecting each chip; the corresponding single-fire and annual-fire evaluation protocols are described in Section 3.2.1. When all MTBS fires from the corresponding calendar year were included, however, a single fire could intersect more than one chip. We therefore distinguish three units: a *chip* is one benchmark image tile; a *unique fire event* is one distinct MTBS fire; and a *fire-chip pair* is one intersection between a fire event and a chip. Across the 793 chips, there were 1,162 unique MTBS events and 1,314 fire-chip pairs. Analysis-specific eligibility filters produced the smaller cohorts summarized in Table 1.

Benchmark composition. The chips span fires across the contiguous United States from 2018–2021, with most events occurring in the western US (Figure 1). We obtained biome information from RESOLVE Ecoregions 2017 (Dinerstein et al., 2017), and pre-fire land cover from Land Change Monitoring, Assessment, and Projection (LCMAP) v1.3 (Brown et al., 2020), both via GEE. Most chips represent fires in temperate, xeric, and Mediterranean biomes. The majority of the burned area occurred in shrublands (63.5%) and forests (32.2%), and the cohort includes both wildfires and prescribed fires. Pixels that burned at low severity account for 61.6% of the total burned area, while high-severity pixels represent only 6.0%. The dataset is also strongly class-imbalanced, with an approximately 1:7 ratio of burned to unburned pixels.

(a)

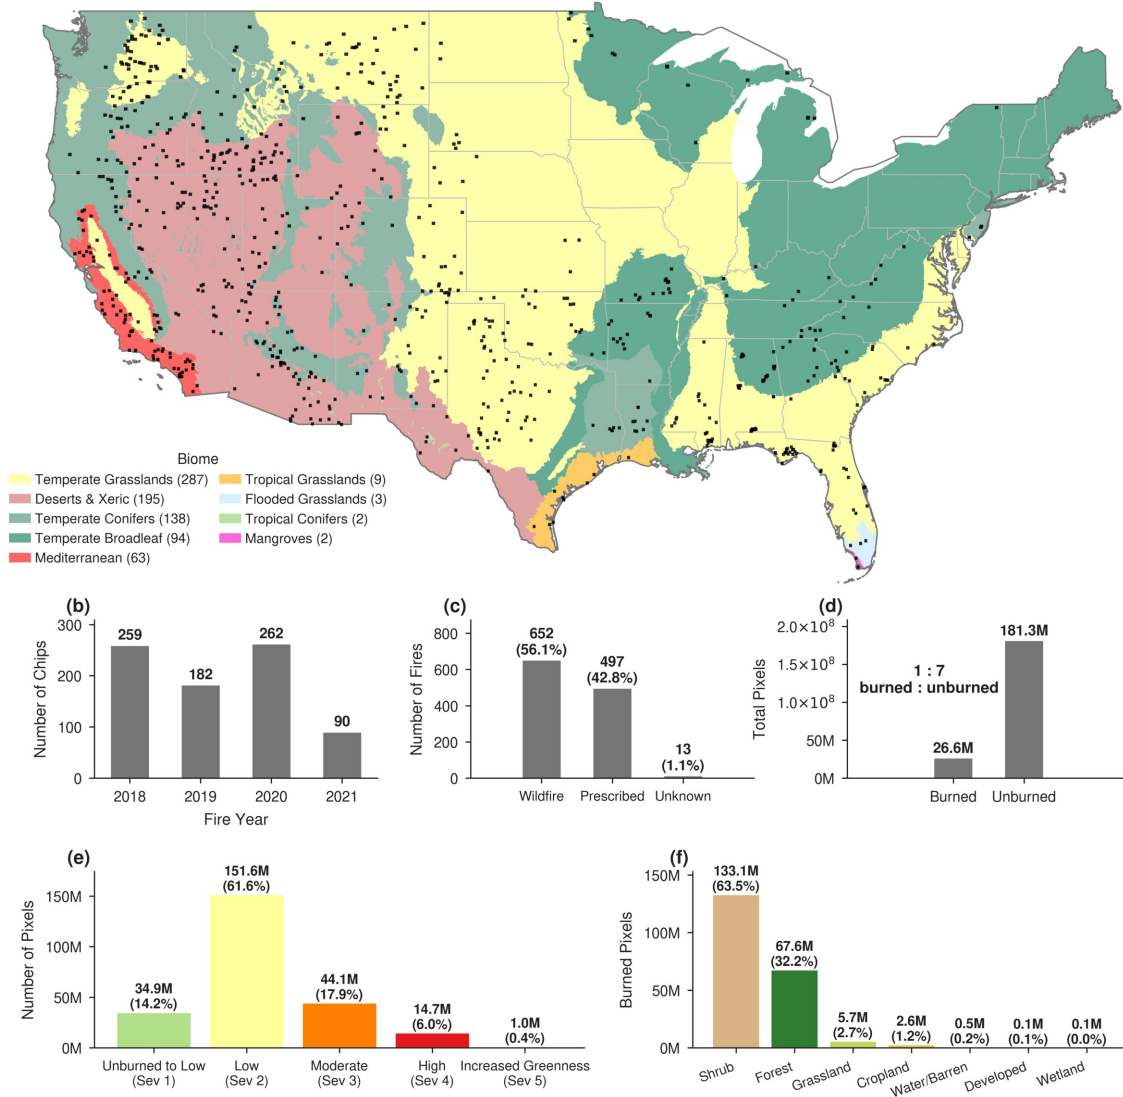


Figure 1: Distribution and composition of the HLS Burn Scars benchmark across the contiguous United States (2018–2021). (a) Chip locations by biome; (b) chips by fire year; (c) fires by incident type; (d) burned and unburned pixels; (e) MTBS burn severity; and (f) pre-fire land cover. Map lines delineate study areas and do not necessarily depict accepted national boundaries.

2.3 Californian dataset

For wall-to-wall evaluation, we mapped burned area across California in 2021 using two complementary reference datasets: 37 fires represented by MTBS severity data and 386 wildfire perimeters from the CAL FIRE Fire and Resource Assessment Program Historical Fire Perimeters database, downloaded from <https://www.fire.ca.gov/what-we-do/fire-resource-assessment-program/fire-perimeters>. MTBS provides severity-based mapping of larger fires, while CAL FIRE includes a broader range of fire sizes. We compared Tessera predictions with two established global

burned area products: MCD64A1 Collection 6.1 at 500 m (Giglio et al., 2018, 2021) and GABAM at 30 m (Long et al., 2019, 2021). Both were obtained for California for 2021 from GEE and evaluated using the same reference data and framework described in Section 3.3.

2.4 European dataset

To evaluate cross-continental and temporal transfer, we used manually delineated wildfire perimeters from the Copernicus Emergency Management Service Rapid Mapping (EMSR) products for 2024–2025 (Copernicus Emergency Management Service), available at <https://mapping.emergency.copernicus.eu/activations/>. We downloaded products for all European fires available for 2024–2025, and when several delineation products were available for the same fire, we retained the latest one. For analyses involving disturbance timing, the earliest post-event satellite acquisition was used as the event date. The resulting dataset contains 88 fires from ten countries: 29 from 2024 and 59 from 2025, with most occurring in fire-prone Mediterranean landscapes in Greece (35), Spain (23), and Portugal (10).

3 Methods

The cohorts, reference labels, and evaluation units used in the primary analyses are summarized in Table 1.

3.1 Latent space analysis

The latent space analysis evaluated whether wildfire disturbance produces a detectable shift in annual embedding space. We assessed whether wildfire increases burned–unburned separability in embedding space by comparing the pre-fire (E_{-1}), fire-year (E_0), and post-fire (E_{+1}) embeddings for both Tesseract and AlphaEarth. Burned pixels were sampled from MTBS severity classes 2–4 and unburned pixels from class 0; ambiguous classes 1 and 5 and pixels within 30 m of the refined burned-area boundary were excluded. Unburned pixels were additionally restricted to areas outside all same-year fire perimeters. Embeddings were extracted at their native 10 m resolution.

Qualitative analysis. We visualized the structure of the latent space using PCA plots and spatial embedding maps. For the PCA plots, we sampled up to 5,000 pixels per class from each chip and projected E_0 and E_{-1} embeddings into a joint two-dimensional PCA space, with points coloured by pre-fire land cover or fire-year burn status. For spatial visualization, following Zoran et al. (2026), we fitted PCA jointly to E_{-1} and E_0 and mapped the first three components to RGB channels. In contrast, we fitted unsupervised k -means clustering ($k = 2$) separately for each embedding year in the original embedding space and mapped the resulting cluster assignments spatially.

Quantitative analysis. We quantified burned–unburned separability at the level of individual fire–chip pairs. For each pair, we randomly sampled up to 1,000 pixels from the target fire and an equal number of unburned pixels outside all same-year fire perimeters. Pairs with fewer than 100 eligible pixels per class were excluded (32 excluded; $n = 1,282$). For E_{-1} , E_0 , and E_{+1} , we calculated (1) cosine distance between burned and unburned class centroids and (2) agreement between burn

Table 1: Primary experimental cohorts and evaluation units. Unit definitions are provided in Section 2.2.

Analysis	Cohort and evaluation
Latent-space analysis (Section 3.1)	1,282 eligible fire-chip pairs from 793 chips; balanced burned and unburned samples from refined MTBS masks across E_{-1} , E_0 , and E_{+1} ; separability scored per pair
Single-fire mapping (Section 3.2.2)	Single-fire subset: 559 chips; refined MTBS masks; three-fold spatial CV; full-chip, pixel-pooled scoring
Annual BA mapping (Section 3.2.3)	793 chips; union of all same-year refined MTBS burned areas; three-fold spatial CV; full-chip, pixel-pooled scoring
California wall-to-wall (Section 3.3)	Train: 696 non-California chips with refined MTBS masks. Evaluate: statewide 2021 reference from 37 MTBS fires and 386 CAL FIRE perimeters
European transfer (Section 3.4)	Train: 793 US chips from 2018–2021 with refined annual-fire MTBS labels. Evaluate: 88 European EMSR fire AOIs from 2024–2025, one per fire
Fire timing (Section 3.5)	Train: burned pixels from 793 chips using MTBS ignition DOY. Evaluate US: 1,300 eligible fire-chip pairs using three-fold spatial CV; pixel predictions averaged for each pair. Evaluate Europe: 88 EMSR fires; pixel predictions averaged per fire and compared with the earliest post-event image date.

labels and k -means clusters ($k = 2$), allowing cluster labels to be permuted for maximum agreement. Because the classes are balanced, k -means agreement of 0.5 corresponds to random assignment, while 1 indicates perfect separation by burn status.

3.2 Benchmark experiments

We used the HLS Burn Scars benchmark to systematically compare annual embeddings with conventional remote sensing imagery for burned area mapping. Each experiment was formulated as a downstream burned area mapping task: the input was either conventional remote sensing imagery or an annual embedding stack, and the output was a binary per-pixel prediction of burned or unburned area. Each input representation was evaluated using the same set of downstream models and fixed training procedures, without hyperparameter tuning, so that performance differences reflect the inputs rather than the models. Choices specific to each experiment, including input years, label, and evaluation, are described below.

3.2.1 Benchmark setup and evaluation

The benchmark setup must account for a mismatch between event-based imagery and annual embedding inputs. Each HLS Burn Scars chip was originally labelled for one target fire. In contrast, Tessera and AlphaEarth embeddings summarize an entire calendar year, so a model operating on these embeddings may respond to any fire that occurred during that year. We therefore used two evaluation protocols. The *single-fire protocol* included only chips in which a single MTBS fire oc-

curred within the chip bounds during the target year. This provides the fairest comparison between annual embeddings and event-specific imagery. The *annual-fire protocol* instead included all benchmark chips, including the ones containing multiple fires that burned in the target year, and evaluated predictions against the union of all same-year fires occurring within each chip. This protocol better matches the temporal support of annual embeddings and tests whether they can identify the chip’s entire annual burned area.

We used two pixel-level classifiers, L2-regularized logistic regression and Random Forest (RF), and two spatial segmentation models, a standard U-Net and a lightweight U-Net (Table 2). We used logistic regression to test whether burned and unburned pixels were linearly separable in the input feature space, and RF to capture nonlinear pixel-level relationships. We used U-Net-based models to evaluate whether spatial context improves burned area delineation. U-Net is a standard architecture for image segmentation and is commonly used for burned area mapping (Ronneberger et al., 2015; Ribeiro et al., 2023; Seydi et al., 2022). We implemented two variants with different capacities: a lightweight U-Net as a parameter-efficient spatial baseline, and a standard U-Net with a randomly initialized ResNet-18 encoder to test whether performance is limited by downstream model capacity. Full implementation details are provided in Section S3 of the Supplementary Material.

Table 2: Downstream models used in burned area mapping experiments.

Model	Type	Key configuration	Training configuration
Logistic regression	Linear pixel classifier	L2 regularization; $C = 1$; balanced class weights; standardized inputs	—
Random Forest	Non-linear pixel classifier	200 trees; $\sqrt{d}$ features/split; unrestricted depth; min. leaf 5; min. split 10	—
Standard U-Net	Spatial segmentation	ResNet-18 encoder, randomly initialized; ~ 14.5 M parameters	BCE + Dice; AdamW ($lr = 10^{-4}$); batch 32; max. 50 epochs; patience 10
Lightweight U-Net	Spatial segmentation	3-level encoder–decoder; base width 32; ~ 0.87 M parameters	BCE + Dice; AdamW ($lr = 10^{-4}$); batch 64; max. 50 epochs; patience 10

The inputs used to train downstream models were either conventional HLS imagery or annual embedding stacks from Tessera or AlphaEarth. Pixel-level models were trained using stratified random samples from each training chip, sampling 1,000 burned and 1,000 unburned pixels from the reference mask. Spatial models were trained using eight random 256×256 crops per chip per epoch, for a maximum of 50 epochs.

All downstream models were validated using spatially blocked three-fold cross-validation to pre-

vent spatial leakage between nearby chips. Chips were linked into connected components if they shared an MGRS tile, intersected the same MTBS fire event, or had spatial footprints overlapping by more than 1% of the smaller chip. These components were then partitioned into three approximately equal folds, ensuring that the training and validation sets were disjoint with respect to MGRS tile, fire event, and overlapping footprint. The same folds and training procedure were used for all input representations. For spatial models, a small fixed set of crops from the held-out fold was used to monitor validation loss and select the checkpoint for early stopping (patience 10); no other hyperparameters were tuned using the held-out fold. Final metrics were calculated over the full held-out fold and were reported as mean and standard deviation across the three folds.

Accuracy metrics were standard binary segmentation metrics: precision, recall, F1 score, Intersection over Union (IoU), and overall accuracy. Unless otherwise stated, metrics were reported for the burned class. Predictions were produced on a 10 m grid aligned to the embedding resolution. For benchmark experiments evaluated against MTBS reference labels, the predicted burn probabilities were aggregated from 10 m to 30 m by averaging over each non-overlapping 3×3 block of 10 m pixels, and the resulting 30 m probability was thresholded at 0.5 to obtain the 30 m binary prediction.

3.2.2 Single-fire mapping: comparison with fire-specific HLS imagery

This experiment tested whether annual embeddings can match event-based burned area delineation without requiring curated fire-specific imagery. We compared four input representations: Tessera E_0 , AlphaEarth E_0 , post-fire HLS imagery, and paired pre/post HLS imagery. The paired HLS input contained 21 channels: six pre- and six post-fire reflectance bands, pre- and post-fire Normalized Burn Ratio (NBR), differenced NBR (dNBR), and six band-wise reflectance differences. We used the single-fire protocol defined in Section 3.2.1, which includes only chips in which a single MTBS fire occurred during the target year. The comparison was restricted to the 559 single-fire chips with more than 80% valid pixels in both the pre- and post-fire HLS inputs. All four inputs used the same chips, reference masks, and spatially blocked folds. Paired HLS input construction and missing-data handling are detailed in Section S1 of the Supplementary Material.

3.2.3 Annual burned area mapping

This experiment tested whether annual embeddings can map the combined burned area of all MTBS fires occurring within each chip during the embedding year. We used all 793 benchmark chips, including those containing multiple fires in the same year, and evaluated Tessera and AlphaEarth fire year embeddings (E_0) using logistic regression, Random Forest, and the lightweight U-Net. The reference target was the annual fire mask defined in Section 3.2.1, representing the union of all refined MTBS burned area masks for fires occurring within the chip during the corresponding calendar year.

3.3 Zero-shot regional wall-to-wall mapping

To test zero-shot regional mapping, we applied a Tessera-trained model wall-to-wall across California in 2021 without using California fire data for training, model tuning or post-processing. We compared

its output with GABAM and MCD64A1. The experiment tested whether annual embeddings can map all burned areas across a region without prior knowledge of the region, or where or when the fires occurred. We trained a lightweight U-Net on Tessera E_0 embeddings as input from all 696 benchmark chips outside California using annual-fire labels described in Section 3.2.1. Because all available non-California chips were used for training, the model was trained for a fixed 40 epochs rather than using a held-out validation set for early stopping. The trained model was then applied to 2021 Tessera embeddings across California, producing 10 m probabilities thresholded at 0.5 to obtain a binary burned area map. Tessera, GABAM, and MCD64A1 predictions were resampled to the common 30 m MTBS grid using nearest-neighbour resampling.

We performed complementary pixel-level and fire-level analyses. We constructed a statewide reference by combining MTBS and CAL FIRE data. Where MTBS burn-severity data were available, we classified pixels in classes 2–4 as burned; elsewhere, we treated all pixels within CAL FIRE perimeters as burned. For pixel-level evaluation we reported F1, IoU, omission error (1–recall), and commission error (1–precision), commonly used for burned area product assessment (Padilla et al., 2014). Because MTBS severity class 1 (“unburned to low”) is ambiguous, we reported metrics both with class 1 treated as unburned and with it excluded. At the fire level, predicted connected components were compared with 386 individual CAL FIRE fire polygons to quantify detection and spatial agreement across event sizes. A fire was considered detected if any predicted component overlapped it, while spatial agreement for detected fires was assessed separately using fire-level IoU. The same evaluation was applied to Tessera, GABAM, and MCD64A1.

3.4 Cross-continental transfer

This experiment tested whether fire disturbance representations learned from United States fires generalize across both space and time. We evaluated a model trained on US fires from 2018–2021 on European fires from 2024–2025, providing a cross-continental and cross-year transfer test. We trained the lightweight U-Net model on Tessera E_0 embeddings from all 793 chips using refined annual-fire MTBS labels, described in Section 3.2.1. The trained model was then applied without retraining to 88 European EMSR fires and evaluated using F1 and IoU. To restrict evaluation to the mapped fire and its immediate surroundings, pixel-level metrics were computed within a rectangle containing a 1 km buffer around each EMSR ground-truth burn perimeter. All pixels inside the resulting axis-aligned bounding box were included in the F1 and IoU calculations.

3.5 Fire timing prediction

We tested whether Tessera and AlphaEarth E_0 embeddings retain information about intra-annual fire timing, using MTBS ignition day of year as the regression target. Because MTBS provides fire-level ignition dates rather than pixel-level burn dates, all burned pixels belonging to the same fire were assigned the same target. This introduces label noise because individual pixels within a fire perimeter may burn days or weeks after ignition. The experiment therefore tested approximate fire-level timing rather than true pixel-level burn timing.

We trained separate Random Forest regression models using Tessera or AlphaEarth E_0 embeddings from reference burned pixels only. The task was therefore conditional on burned area being known: given pixels labelled as burned in the reference data, could the embedding predict when the fire occurred? During inference, the models predicted the day of year for each burned pixel. For the US analysis, pixel-level predictions were averaged within each of the 1,300 eligible fire-chip pairs; for the European analysis, they were averaged once per fire. Predictions were evaluated using mean absolute error (MAE), root mean squared error (RMSE), and R^2 .

We evaluated timing prediction for both Tessera and AlphaEarth in the US benchmark setting, and for Tessera only in the European transfer setting. For the US experiment, we used the same spatially blocked three-fold cross-validation scheme as in Section 3.2.3. For the European transfer experiment, we trained the regressor on all US fires from the HLS Burn Scars benchmark chips and applied it without retraining to the 88 EMSR fires, using the event dates defined in Section 2.4. Timing performance was additionally stratified by burned-area recall to assess its dependence on successful disturbance detection.

4 Results

4.1 Encoding of wildfire disturbance in annual embeddings

Wildfire disturbance was associated with a marked reorganization of Tessera’s latent space during the fire year. Burned and unburned pixels that overlapped substantially in the pre-fire embedding space (E_{-1}) became separable in the fire year (E_0). This separation weakened again in the post-fire year (E_{+1}). The effect is visible in illustrative examples (Figure 2; Figure 3a–d) and was consistent across the full set of fire-chip pairs (Figure 3e–f).

In the absence of disturbance, both Tessera and AlphaEarth showed organization in latent space that is consistent with pre-fire land cover. In E_{-1} , PCA projections grouped pixels by land-cover class, with substantial overlap between future burned and unburned samples (Figure 3a–b), while the spatial embedding maps primarily reflected landscape structure rather than the future burn perimeter (Figure 2). In E_0 , wildfire became a dominant organizing feature of Tessera embeddings. Burned pixels separated from unburned pixels in the leading PCA dimensions despite variation in pre-fire land cover. The burn scar emerged as a coherent region in RGB composites of the first three principal components, and unsupervised k-means clustering with $k = 2$ produced a spatial cluster closely aligned with the burned area, without using burn labels. The corresponding structure was weaker in AlphaEarth, where persistent land-cover variation remained more prominent and k-means did not isolate the burn scar as clearly. These qualitative patterns were common but not universal, with some burn scars showing substantially weaker separation. Additional qualitative examples and nonlinear UMAP projections are provided in Section S4 of the Supplementary Material.

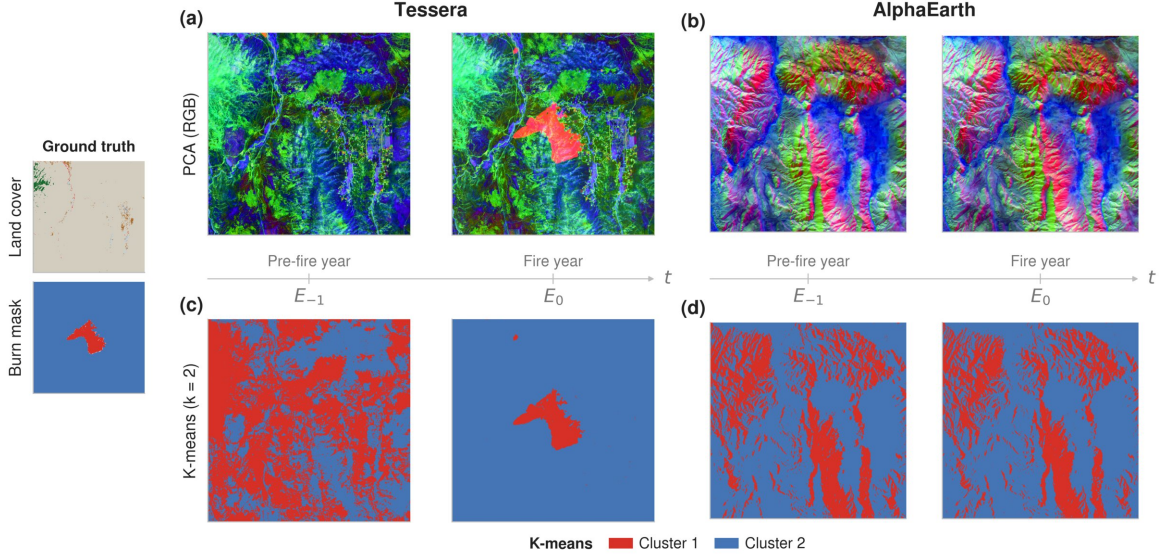


Figure 2: Spatial organization of pre-fire and fire year embeddings for an illustrative fire-chip pair. Left panels show pre-fire land cover and the reference burned area. (a–b) RGB composites of the first three principal components of Tesseract and AlphaEarth embeddings for E_{-1} and E_0 ; PCA was fitted jointly across both years for each embedding product. (c–d) Spatial assignments from unsupervised k-means clustering ($k = 2$), fitted separately to each embedding year.

Quantitative separability metrics confirmed this pattern across fire-chip pairs (Figure 3e–f). For Tesseract, k-means agreement with burn labels rose from 0.65 in E_{-1} to 0.90 in E_0 before falling back to 0.72 in E_{+1} , while cosine distance between burned and unburned centroids increased from 0.03 to 0.15 and returned to 0.06. For AlphaEarth, the corresponding changes were much smaller: k-means agreement moved from 0.65 to 0.68 and 0.68, and centroid distance from 0.04 to 0.06 and 0.05. Wildfire disturbance therefore produced a strong separation between burned and unburned pixels in the fire year Tesseract embeddings, but only a marginal shift in AlphaEarth.

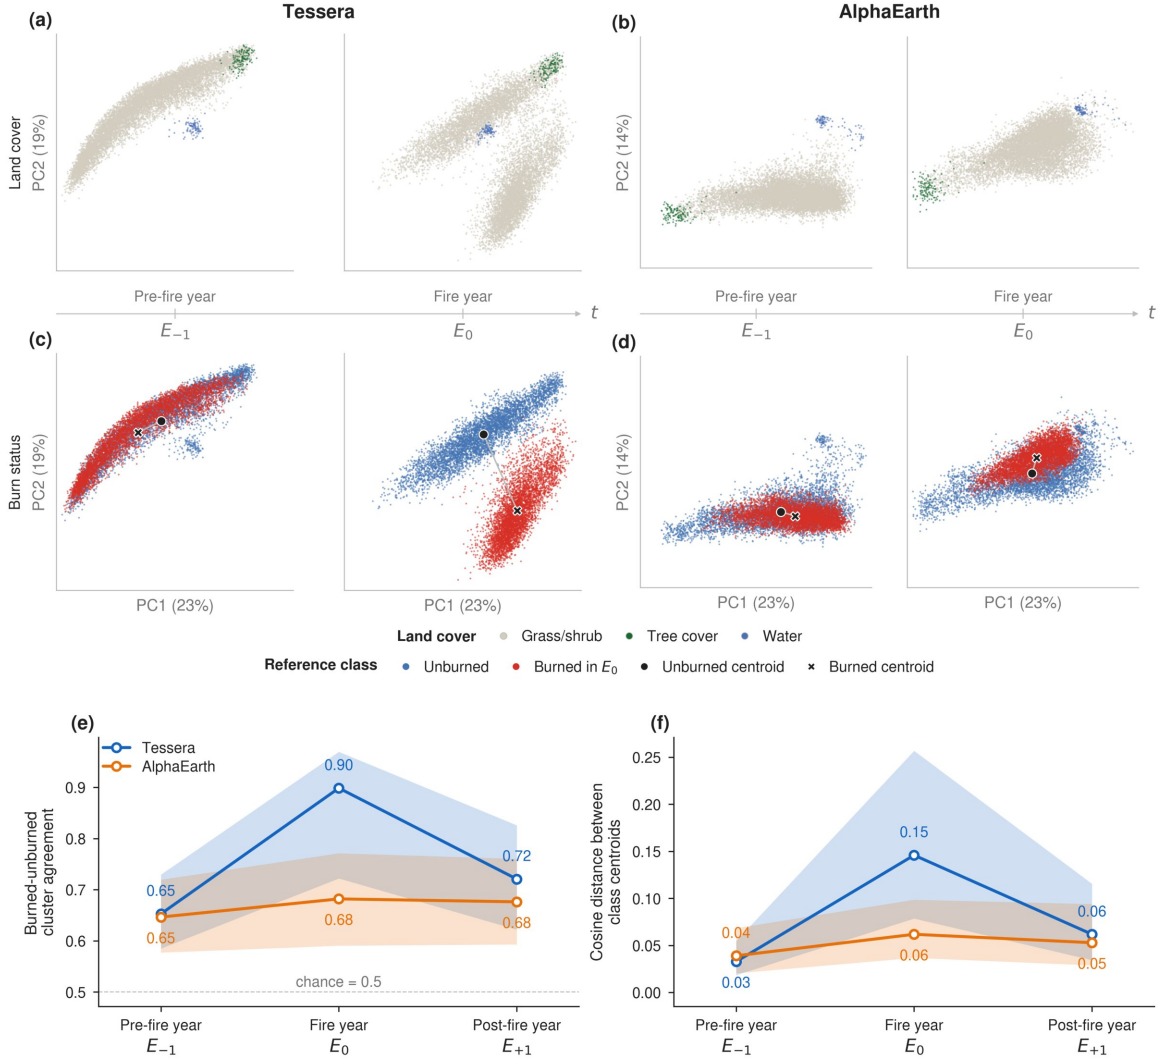


Figure 3: Wildfire disturbance reorganizes annual Earth-observation embedding space. (a–d) PCA projections for an illustrative fire–chip pair, with PCA fitted jointly to (E_{-1}) and (E_0) embeddings of each product. Points are colored by pre-fire land cover (a–b), or burn status in fire year (c–d). (e–f) Separability across all eligible fire–chip pairs: (e) agreement between k-means clusters and burn labels, where 0.5 indicates chance agreement; and (f) cosine distance between burned and unburned centroids. Lines show medians and shaded regions the interquartile range.

4.2 Annual embeddings delineate burn scars as effectively as event-based approaches

Models trained on Tessera embeddings matched or exceeded the paired pre- and post-fire HLS baseline for every downstream model, while outperforming post-fire imagery alone and AlphaEarth embeddings (Figure 4; Table S1 of the Supplementary Material). Tessera with the full U-Net achieved the strongest overall performance ($F1 = 0.916$, $IoU = 0.845$), followed by the paired pre/post HLS U-Net ($F1 = 0.905$, $IoU = 0.827$). The added temporal context from pre-fire imagery substantially

improved the HLS baseline across models (U-Net: F1 = 0.860 to 0.905; RF: 0.679 to 0.798; logistic regression: 0.650 to 0.791). Nevertheless, a single annual Tesseract embedding matched the paired fire-specific HLS representation without requiring fire-specific image selection, task-specific feature construction, or explicit spectral differencing. Qualitative maps illustrate these differences across performance regimes (Figure 5). The Lions Fire illustrates the importance of acquisition timing for fire-specific inputs: the benchmark HLS image was acquired 30 days after ignition while the fire was still ongoing, capturing only part of the final burn scar.

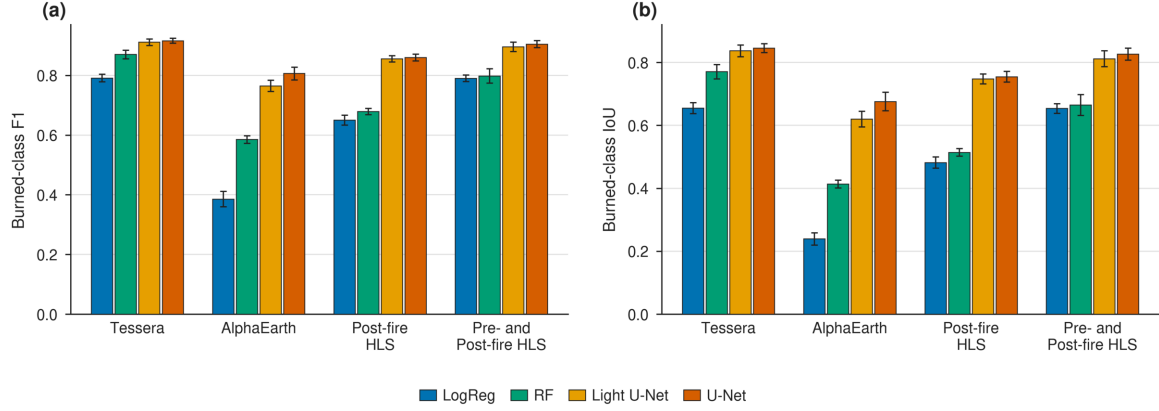


Figure 4: Burned area delineation across input representations and downstream models on the 559 single-fire chips. Bars show mean burned-class (a) F1 and (b) IoU across three spatially blocked cross-validation folds, and error bars show ± 1 standard deviation. Full metrics are provided in Table S1 of the Supplementary Material.

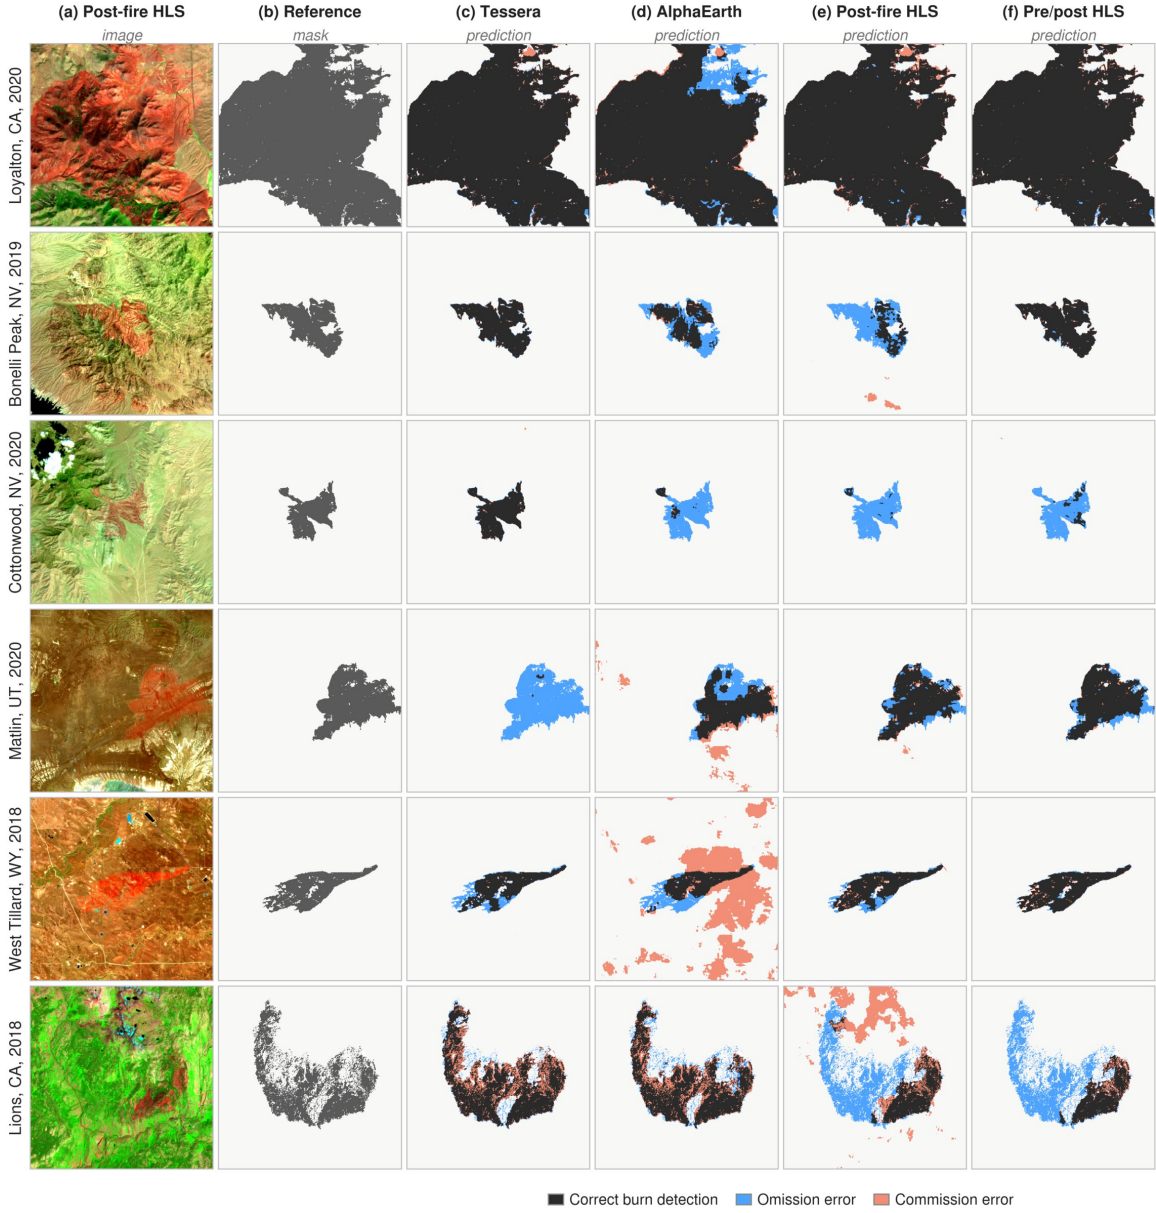


Figure 5: Qualitative comparison of single-fire burned area delineation across input representations. Columns show (a) benchmark post-fire HLS image as a SWIR2–NIR–Red false-colour composite, (b) the refined MTBS reference, and predictions from (c) Tesseract, (d) AlphaEarth, (e) post-fire HLS, and (f) paired pre/post HLS. Black indicates correct burn detection, blue omission error, and orange commission error. Rows were selected to illustrate characteristic performance regimes across approaches.

The effect of downstream model choice depended strongly on the input representation. Tesseract already performed strongly with pixel-level models: logistic regression reached $F1 = 0.791$, matching the paired HLS baseline, while the Tesseract RF reached $F1 = 0.870$ and slightly outperformed the full U-Net trained on post-fire HLS alone ($F1 = 0.860$), despite using no spatial context. Adding

spatial modelling provided much larger gains for representations with weaker pixel-level performance. Moving from RF to the lightweight U-Net increased F1 by 0.18 for both AlphaEarth and post-fire HLS, compared with 0.10 for paired HLS and only 0.04 for Tessera. Notably, AlphaEarth showed the largest gain despite its embeddings already containing patch-level spatial context. Increasing U-Net capacity provided little additional benefit: moving from the lightweight U-Net (0.87 M parameters) to the full U-Net (14.5 M) changed F1 by less than 0.01 for Tessera and both HLS inputs, and by 0.04 for AlphaEarth. In this experiment, the choice of input representation mattered far more than the capacity of the downstream model.

4.3 Annual embeddings accurately map the combined burned area of multiple fires

Tessera maintained strong performance when mapping combined burned area from multiple MTBS fires within each chip and embedding year, rather than only the benchmark target fire. Across 793 chips containing 1,162 distinct MTBS fires, the Tessera lightweight U-Net achieved $F1 = 0.896 \pm 0.016$ and $IoU = 0.813 \pm 0.027$ across the three cross-validation folds (Table 3).

Table 3: Burned area mapping performance across 793 benchmark chips containing 1,162 distinct MTBS fires. Results are mean $\pm$ standard deviation across three spatially blocked cross-validation folds.

Representation	Model	IoU $\uparrow$	F1 $\uparrow$
Tessera	LogReg	0.642 ± 0.041	0.781 ± 0.031
Tessera	RF	0.739 ± 0.038	0.849 ± 0.025
Tessera	Light U-Net	0.813 ± 0.027	0.896 ± 0.016
AlphaEarth	LogReg	0.241 ± 0.033	0.388 ± 0.043
AlphaEarth	RF	0.402 ± 0.053	0.571 ± 0.054
AlphaEarth	Light U-Net	0.602 ± 0.044	0.751 ± 0.035

Annual embeddings also recovered fires beyond the original benchmark target fire. In multi-fire chips, Tessera frequently delineated additional same-year fires present in the annual reference but absent from the original benchmark label (Figure 6). Such detections would be counted as false positives under the original single-fire benchmark but are correct under the annual-fire protocol. Despite the broader prediction target, Tessera lightweight U-Net performance declined only slightly relative to the single-fire experiment, from $F1 = 0.911$ to 0.896.

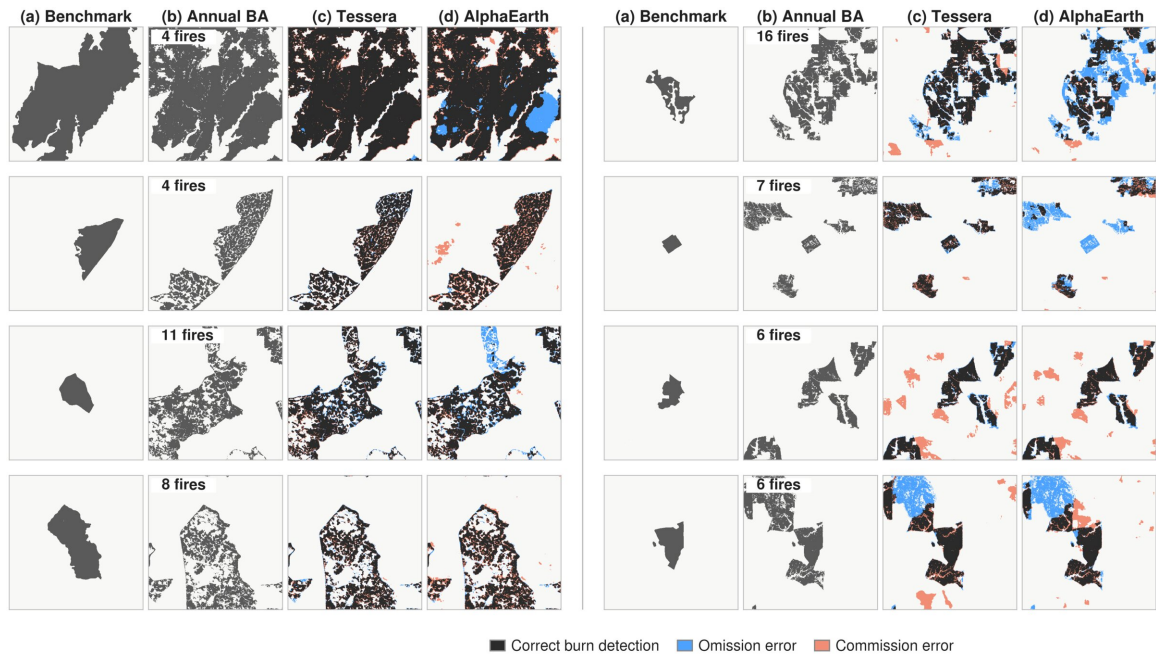


Figure 6: Examples of multi-fire benchmark chips. Columns show (a) the original target-fire label, (b) the annual reference containing all same-year fires, and predictions from (c) Tesseract and (d) AlphaEarth. Numbers in (b) indicate the number of same-year MTBS fires intersecting each chip. Dark grey indicates correct burn detection, blue omission error, and red commission error.

Tesseract outperformed AlphaEarth across all downstream models, with the largest gap occurring for the simplest models. The narrowing gap with increasing model capacity is consistent with the latent-space results: Tesseract embeddings provide a more directly separable burn signal, while a spatial decoder partially compensates for weaker separability in AlphaEarth. For AlphaEarth, the gain from spatial modeling was driven mainly by precision, which increased from 0.260 with logistic regression to 0.733 with the lightweight U-Net, while recall remained almost unchanged (0.770 to 0.772). Spatial context therefore primarily suppressed false positives rather than recovering many additional burned pixels.

Fire-level recall varied with ignition timing (Figure 7). Tesseract recall remained high through most of the year but declined sharply for fires ignited near the end of the calendar year, particularly in November and December. AlphaEarth showed lower and more variable recall throughout the year and a weaker raw late-season decline. Covariate-adjusted analyses nevertheless confirmed reduced late-season recall for both representations after accounting for fire and landscape characteristics (Section S6 of the Supplementary Material).

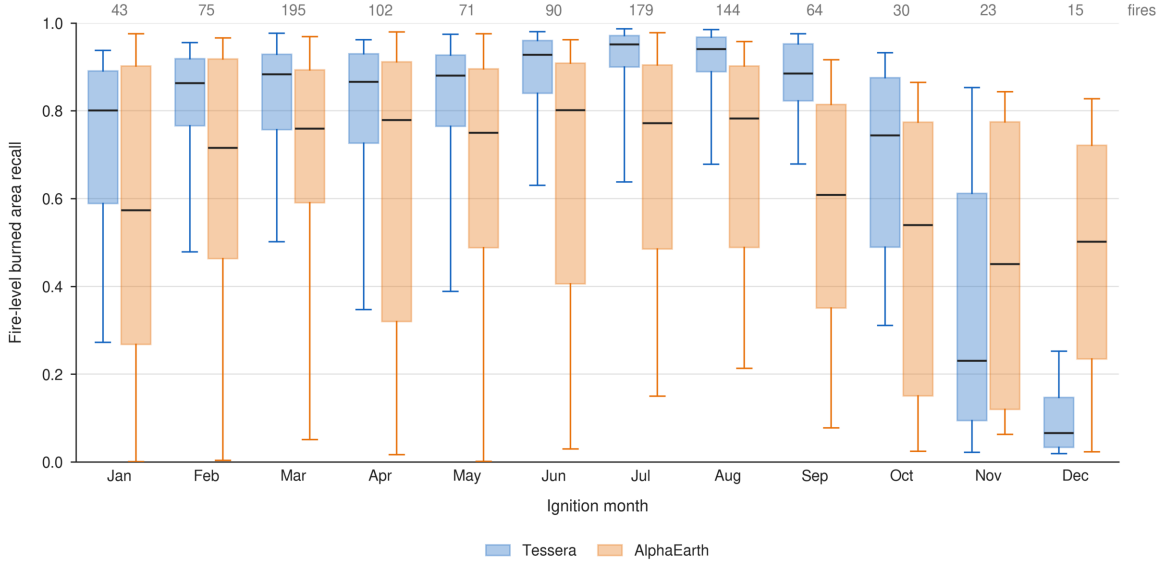


Figure 7: Fire-level burned area recall by ignition month for Random Forest models using Tesseract and AlphaEarth fire-year embeddings. Boxplots show recall across MTBS fire events; numbers indicate fires per month.

4.4 Tesseract supports zero-shot regional mapping in California

A Tesseract model trained entirely outside California successfully mapped statewide burned area for 2021 (Figure 8(a,b)). This deployment setting is deliberately demanding: the model was trained only on benchmark chips, with no statewide negative examples and no region-specific post-processing. The model recovered nearly all reference burned area while also detecting more small and medium-sized fires than the GABAM and MCD64A1 products. Its main apparent weakness is the number of potential false positives, but manual inspection showed that many of the largest unmatched predictions were real fires absent from both reference datasets.

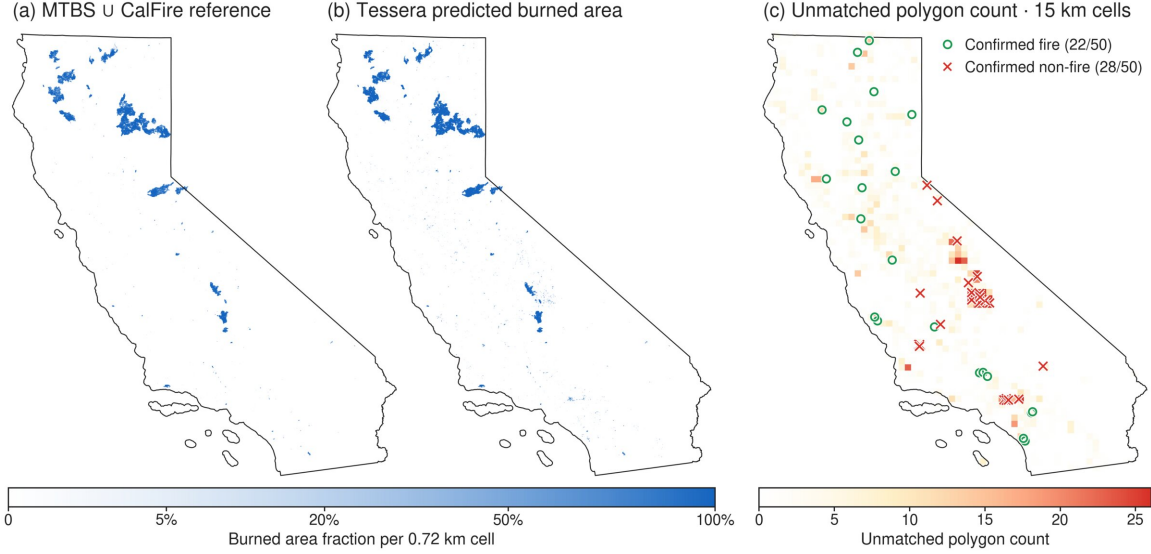


Figure 8: Zero-shot wall-to-wall burned area mapping across California in 2021. (a) Combined MTBS and CAL FIRE burned area reference and (b) Tesseract prediction, shown as the fraction of burned area within 0.72 km grid cells. A nonlinear color normalization is used in (a–b) to improve visibility of low burned area fractions at statewide scale. (c) Spatial distribution of Tesseract prediction polygons unmatched by either MTBS or CAL FIRE, shown as counts per 15 km grid cell after excluding polygons within 300 m of a reference perimeter. Symbols show the 50 largest manually reviewed unmatched polygons: 22 were confirmed as genuine fires absent from both reference inventories and 28 as non-fire detections.

Table 4: Statewide pixel-level performance of burned area products in California in 2021 against the combined MTBS–CAL FIRE reference. Reference data comprise 37 MTBS fires and 386 CAL FIRE fire perimeters. Metrics are reported with MTBS severity class 1 (“unburned to low”) either treated as unburned or excluded from evaluation. Omission error (OE) is unchanged between treatments and is therefore reported once.

Product	Severity 1 as unburned				Severity 1 excluded		
	OE ↓	CE ↓	F1 ↑	IoU ↑	CE ↓	F1 ↑	IoU ↑
Tesseract	3.0%	14.6%	0.908	0.831	5.9%	0.955	0.914
MCD64A1	11.8%	15.8%	0.862	0.757	6.4%	0.908	0.832
GABAM	45.8%	7.0%	0.684	0.520	4.3%	0.692	0.529

According to the pixel-level metrics in Table 4, the Tesseract model achieved the lowest omission error at 3.0%, compared with 11.8% for MCD64A1 and 45.8% for GABAM. Commission error was comparable between Tesseract and MCD64A1, at 14.6% and 15.8%, respectively. GABAM’s commission was substantially lower at 7.0%, but its conservative predictions came at the cost of missing almost half of the reference burned area. Much of the apparent commission error for Tesseract and MCD64A1 occurred within pixels labeled as MTBS severity class 1 in the 37 large fires mapped by MTBS. Severity 1 is defined as “unburned to low severity”, so the burn status of these pixels is

ambiguous in the reference dataset itself. By default, we treated these pixels as unburned, consistent with the labels used for model training. With severity 1 pixels excluded from evaluation, commission errors dropped for all three products, as shown in Table 4, with Tesseract’s and MCD64A1’s errors falling by more than half. Excluding severity 1 substantially reduced apparent commission, but did not change the ranking or overall interpretation of the products.

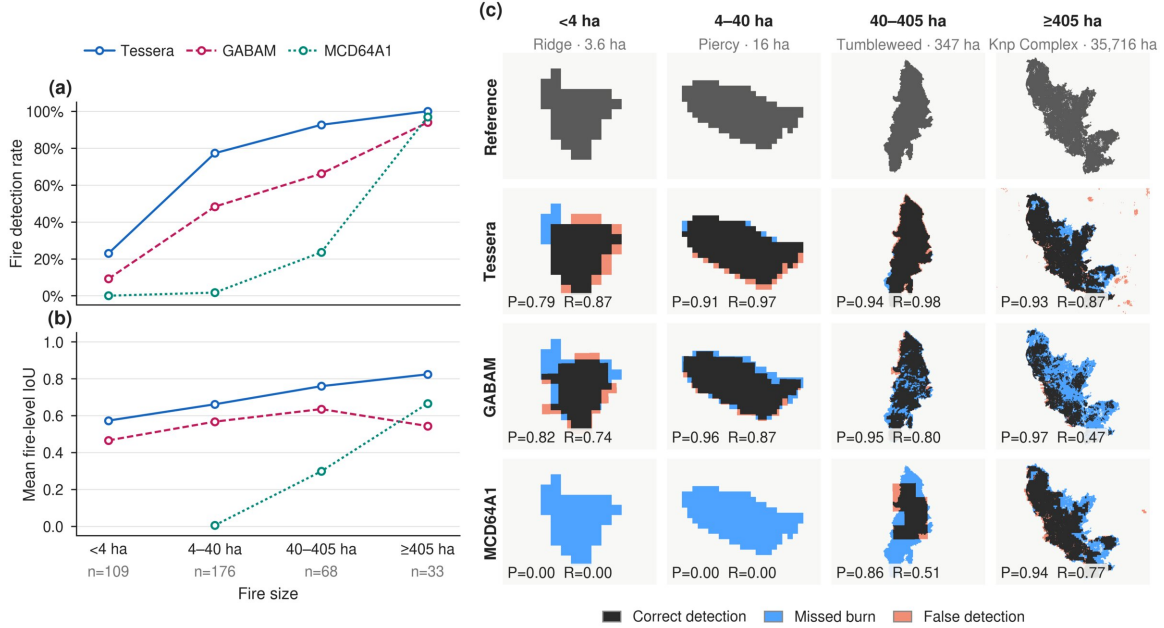


Figure 9: Fire detection and delineation across fire sizes in California in 2021. (a) Detection rate for 386 CAL FIRE fires by size class; (b) mean fire-level IoU among detected fires; and (c) representative examples comparing the reference with Tesseract, GABAM, and MCD64A1. Black indicates correct burn detection, blue omission, and orange commission; P and R denote precision and recall.

Pixel-level metrics were dominated by large fires that represent most statewide burned area. Fire-level evaluation revealed a larger advantage for Tesseract at smaller fire sizes (Figure 9). For fires above 405 ha, all three products had similarly high detection rates, but Tesseract detected 92.7% of fires between 40 and 405 ha, compared with 66.2% for GABAM and 23.5% for MCD64A1. For fires between 4 and 40 ha, detection remained 77.3% for Tesseract, compared with 48.3% and 1.7%, respectively. MCD64A1 was effectively insensitive to fires below 40 ha, and all three products struggled below 4 ha, although Tesseract retained the highest detection rate (22.9%). Among detected fires, Tesseract predictions also showed greater spatial agreement with the reference perimeters, achieving the highest mean fire-level IoU in every size class (Figure 9(b)).

Tesseract produced 2,713 predicted components that did not intersect any MTBS or CAL FIRE perimeter, compared with 820 for GABAM and 170 for MCD64A1. Despite their large number, these components accounted for only a small share of each product’s total predicted burned area: 4.7% for Tesseract, 4.0% for GABAM, and 2.4% for MCD64A1. Most unmatched Tesseract components were small, although components between 40 and 405 ha accounted for the largest share of unmatched

area. Reference disagreement did not always indicate model error: manual inspection of the 50 largest unmatched Tessera components found that 22 were genuine fires visible in satellite imagery but absent from both reference datasets. Confirmed fires were dispersed across California, whereas confirmed non-fire detections clustered in the snow-covered, high-elevation southern Sierra Nevada and the hills surrounding Los Angeles, with additional errors in agricultural regions (Figure 8c). The broader unmatched-polygon distribution showed similar spatial concentrations, indicating that commission errors are systematic rather than random.

4.5 Cross-continental transfer

Burned area segmentation remained strong under transfer across continents, reference data sources, and evaluation years. A light U-Net trained on US HLS Burn Scars benchmark chips from 2018–2021 was applied without retraining to 88 European EMSR fires from 2024–2025, achieving micro F1 = 0.882 and IoU = 0.789 (Table 5). Performance was stable across evaluation years, with F1 = 0.881 in 2024 and 0.883 in 2025. Fire-level macro scores were slightly lower (macro F1 = 0.829 ± 0.142), with most fires mapped accurately while a small number of events performed substantially worse (Figure 10).

Table 5: Cross-continental burned area segmentation on 88 European EMSR fires from 2024–2025 using a Tessera model trained on US fires from 2018–2021. Micro metrics aggregate pixels across fires; macro metrics are mean $\pm$ standard deviation across fires.

Evaluation set	n fires	Micro F1 $\uparrow$	Micro IoU $\uparrow$	Macro F1 $\uparrow$	Macro IoU $\uparrow$
2024	29	0.881	0.787	0.849 ± 0.105	0.750 ± 0.137
2025	59	0.883	0.790	0.820 ± 0.157	0.718 ± 0.180
Combined	88	0.882	0.789	0.829 ± 0.142	0.728 ± 0.168

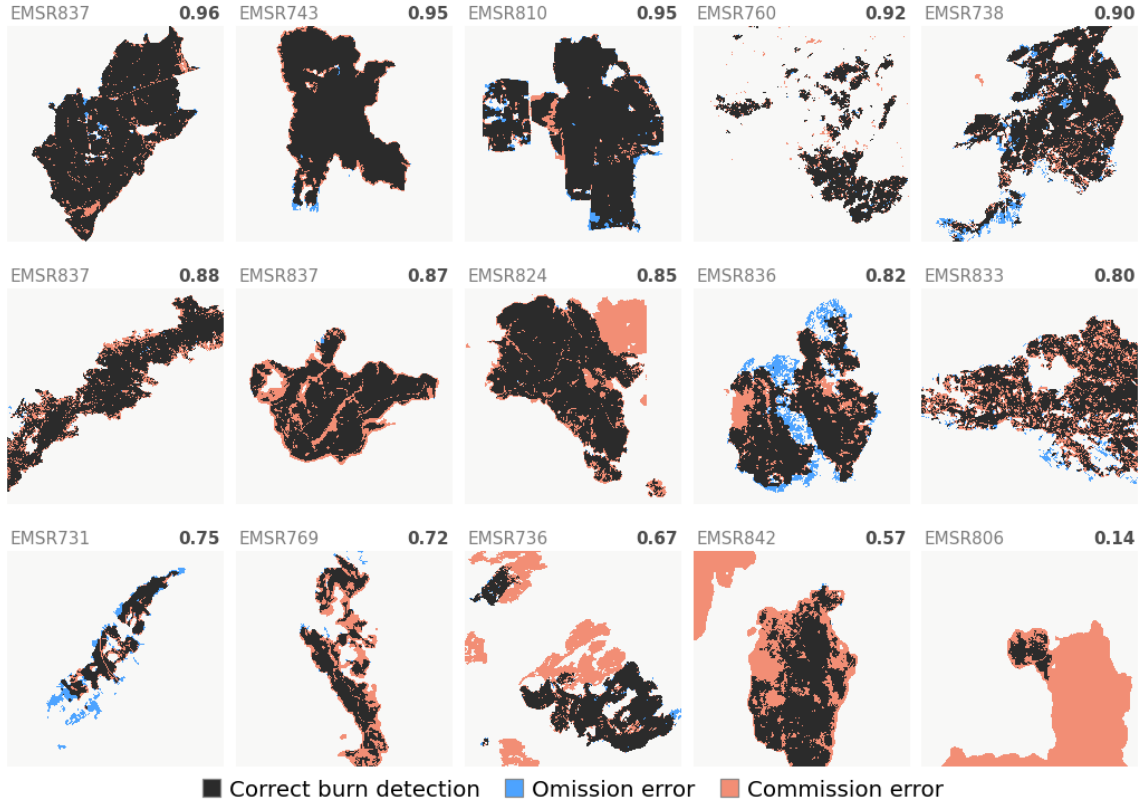


Figure 10: Per-fire Tessera lightweight U-Net predictions for 15 European EMSR fires from 2024–2025. Examples span the observed performance range and are ordered by decreasing IoU. Black indicates correct burn detection, blue omission, and orange commission error; bold values show per-fire IoU.

Inspection of poorly mapped fires showed that many apparent false positives corresponded to actual burned areas from nearby fires that occurred in the same year. False color Sentinel-2 imagery for the six fires that scored F1 below 0.6 (Figure 11) revealed the additional burned area around the reference EMSR perimeters that matched Tessera’s predicted burned area. These detections were counted as false positives, reflecting the mismatch between annual embeddings and single-fire reference labels discussed in Section 4.3. The reported transfer metrics are therefore conservative, and the worst-scoring fires would rank considerably higher against an all-fires annual reference.

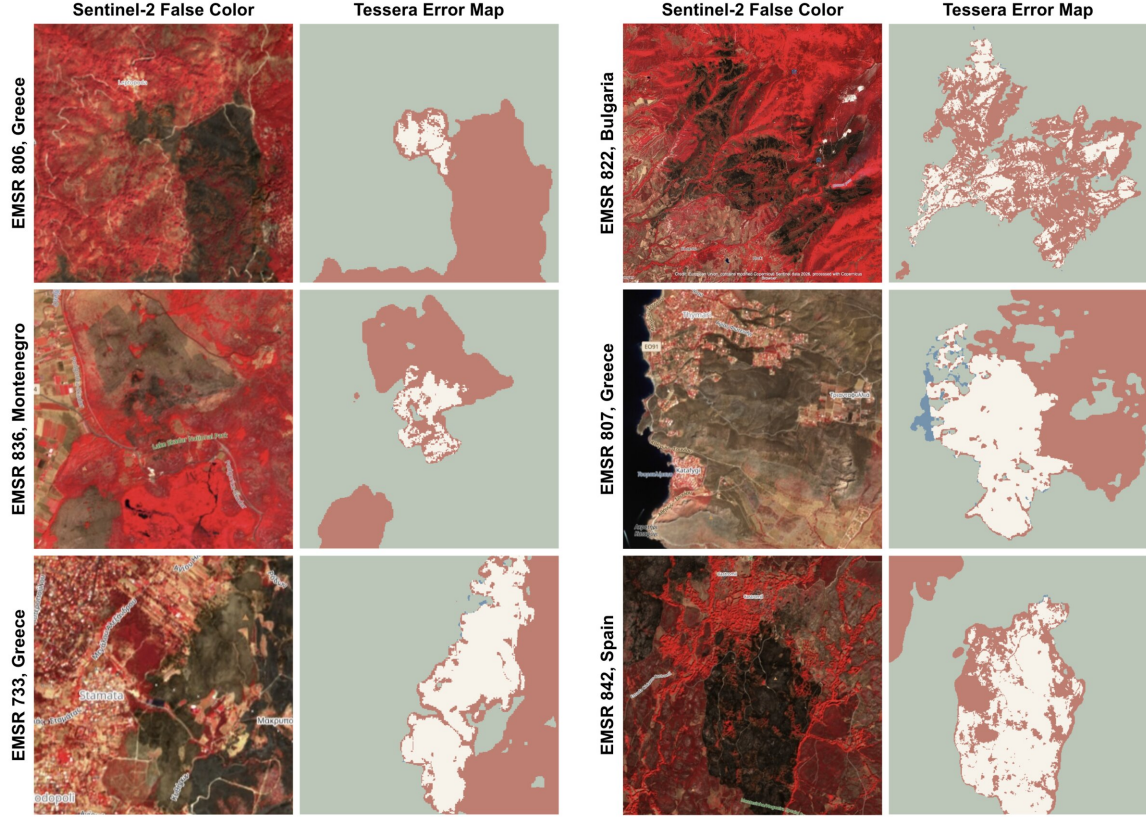


Figure 11: Qualitative error analysis for selected low-performing European EMSR fires. For each event, a Sentinel-2 false color composite (left) is paired with a Tesseract Light U-Net error map (right): true positives (white), true negatives (light green), false positives (red), and false negatives (blue). Many false positives (red) coincide with visible burn scars outside the EMSR evaluation perimeter.

4.6 Tesseract embeddings capture within-year timing of fires

Annual Tesseract embeddings contain information about when a fire occurred within the year, not only whether it occurred. Timing accuracy depended strongly on how well the burned area was detected (Figure 12(d)). Across all fires, Tesseract predicted ignition day of year with $\text{MAE} = 22$ days and dated 81% of fires within ± 30 days. Performance improved to $\text{MAE} = 17$ days for fires with burned area recall > 0.25 and to $\text{MAE} = 13.0$ days ($R^2 = 0.94$; 90% within ± 30 days; $n = 958$) for fires with recall > 0.8 . AlphaEarth also retained some within-year timing information, but with lower accuracy: across all fires, MAE was 37 days and 59% were dated within ± 30 days; among well-detected fires (recall > 0.8), MAE improved to 27.4 days ($R^2 = 0.72$; 65% within ± 30 days; $n = 593$). Fires that were poorly detected spatially were therefore also more difficult to date for both representations, consistent with both tasks depending on how strongly the disturbance is represented in the annual embedding.

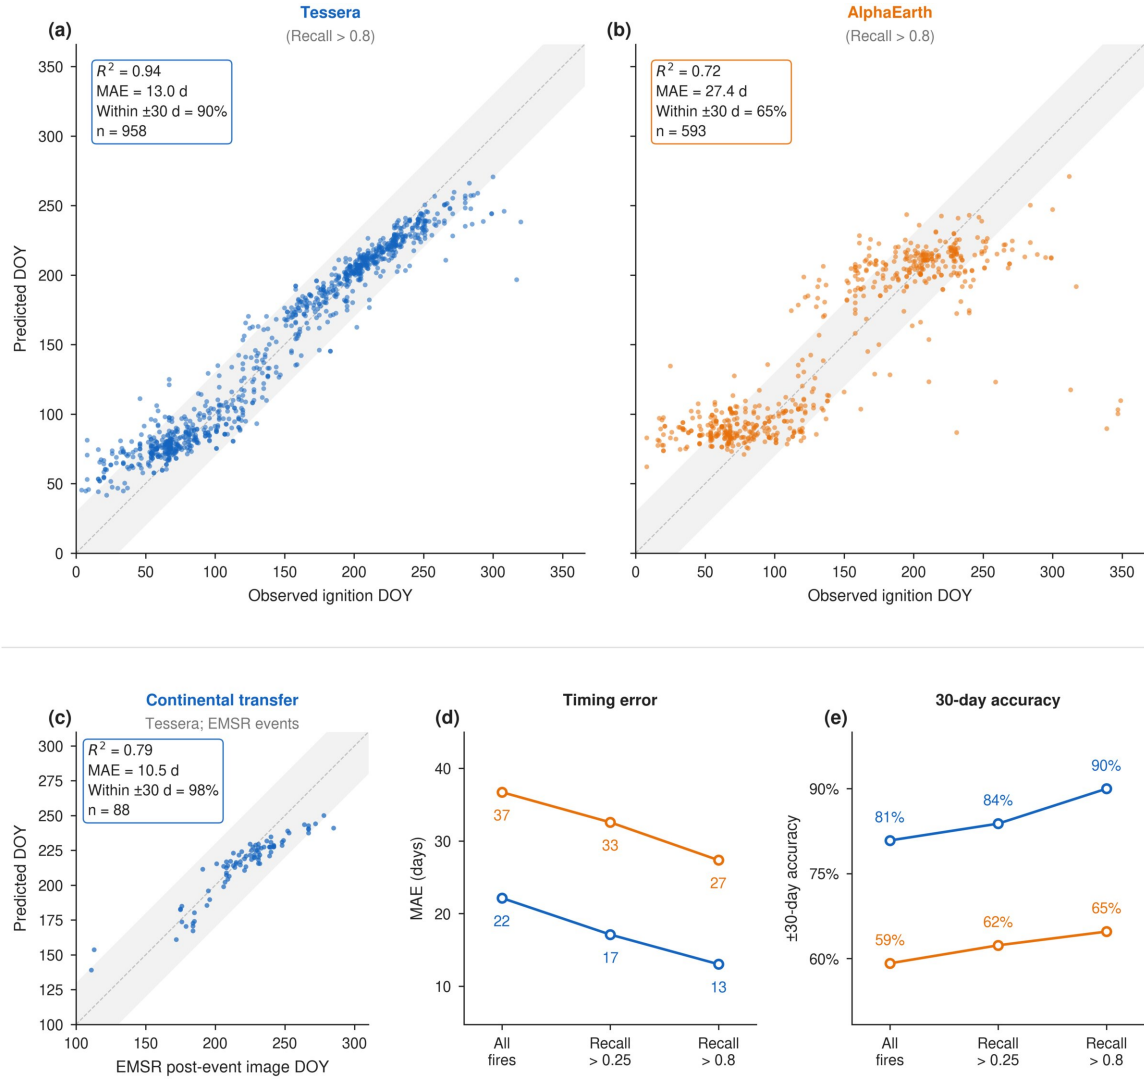


Figure 12: Fire timing prediction from annual embeddings. (a–b) Predicted vs observed ignition day of year for Tesseract and AlphaEarth on fires with burned area recall > 0.8. (c) Continental transfer of Tesseract timing prediction to European EMSR events. (d–e) Mean absolute error and ± 30 day accuracy as a function of burn detection recall threshold.

Timing prediction also transferred to European fires (Figure 12(c)): a model trained only on US fires dated 98% of 2024–2025 EMSR fires within ± 30 days of the reported event date, with MAE = 10.5 days ($R^2 = 0.79$; $n = 88$). Because the European fires occupy a narrower seasonal window than the US benchmark fires, R^2 values are not directly comparable across regions, but the low absolute errors indicate that the encoded timing information is not specific to US fire regimes. Thus, although Tesseract embeddings are annual summaries, they retain sufficient temporal structure to estimate approximate ignition timing for detected fires, extending their utility beyond burned area delineation.

5 Discussion

5.1 Wildfire disturbance is encoded within a single annual embedding

A central result of this study is that wildfire disturbance is encoded directly within a single annual embedding. Fire year Tessera embeddings for burned pixels separated clearly from unburned ones in latent space, and downstream models trained only on the fire year embedding recovered burned area with high accuracy. Even pixel-level logistic regression performed strongly, with no spatial context and no temporal differencing. The disturbance signal is already present in the representation itself. Such information is plausible given what a spectral-temporal embedding is: a summary of a pixel’s full yearly trajectory. Unless a fire occurs at the calendar boundary, the annual observation sequence contains both pre- and post-fire imagery, and the trajectory of a burned pixel looks fundamentally different from that of an undisturbed one. A model trained to summarize trajectories can therefore learn to express the change itself. In this sense, annual embeddings act as a learned representation of the incomplete 2D spectral-temporal surface ($\text{DOY} \times \text{wavelength}$). Conventional composites also summarize a year of observations, but through fixed rules such as medians, best-available pixels, or spectral indices, which flatten temporal structure and can lose short-lived disturbance signals. Learned spectral-temporal embeddings instead preserve whatever aspects of the trajectory are useful for downstream tasks, including whether that trajectory was stable, followed a phenological pattern, or was abruptly disturbed.

Change detection is often formulated as an explicit comparison between pre- and post-event observations. The European Forest Disturbance Atlas compares seasonal Landsat composites of consecutive years (Viana-Soto and Senf, 2025), CCDC fits harmonic models to the pre-disturbance period of spectral bands and searches for breaks from the fitted trajectory (Zhu and Woodcock, 2014), and global burned area products traverse dense time series looking for temporal changes in burn-sensitive spectral information (Giglio et al., 2018; Long et al., 2019). Post-fire segmentation approaches instead classify burn scars from a single well-timed image (Hu et al., 2021; Seydi et al., 2022; Fu et al., 2024), relying on the persistence of the spectral fire signal rather than on change itself. Studies that add pre-fire imagery (Sui et al., 2024), together with our own benchmarks, show that paired pre- and post-fire inputs outperform post-fire imagery alone, highlighting the value of explicit temporal contrast.

Existing approaches thus either measure change explicitly between observations or forgo temporal information and classify its lasting spectral imprint. Temporal embeddings represent a conceptual shift: the comparison is internalized in the representation and moved upstream into foundation model pre-training. The downstream model neither compares observations nor depends on a well-timed post-fire snapshot; it reads out a single learned summary in which the disturbance is already encoded.

Most current geospatial foundation models are not temporal descriptors (Feng et al., 2026a): they encode observations from a single time step, so disturbance mapping with them still requires either explicit pre/post comparison or classification of the post-event state alone. The HLS Burn Scars results illustrate the limitation of the latter. In PANGAEA, a supervised U-Net trained directly on post-fire imagery outperformed all tested geospatial foundation models encoding the

same post-fire input (Marsocci et al., 2024). In our contextual comparison, even a Random Forest on a single annual Tessera embedding exceeded the published post-fire U-Net result, although the evaluation protocols are not strictly head-to-head (Section S8 of the Supplementary Material). The distinction is that Tessera summarizes the temporal trajectory containing both pre- and post-fire observations, rather than learning a representation of the post-fire state alone. Notably, even AlphaEarth, which summarizes observations over time, evaluates change by explicitly comparing sequential annual embeddings, concatenating the before- and after-period representations for supervised change classification (Brown et al., 2025). Seydi (2025) adopted this approach for burned area mapping, using paired pre- and post-fire AlphaEarth embeddings in a bi-temporal Siamese U-Net with explicit feature differencing. In a contextual comparison on the same 17-fire EMSR cohort, we found that the lightweight U-Net trained on a single annual Tessera embedding achieved higher F1 and IoU than this bi-temporal AlphaEarth approach (Section S7 of the Supplementary Material). For Tessera, by contrast, adding explicit temporal context from adjacent embedding years yielded little additional improvement (Section S9 of the Supplementary Material), suggesting that a single annual embedding whose summary window contains the disturbance is often sufficient.

5.2 Disturbance sensitivity differs across foundation models

Tessera and AlphaEarth both produce annual temporal embeddings and both incorporate Sentinel-1 and Sentinel-2 observations, yet they behave very differently for wildfire disturbance, in both latent structure and downstream accuracy. In Tessera, the fire year embedding space is strongly reorganized by burn state: burned and unburned pixels separate clearly, simple classifiers perform well, and spatial models need only modest capacity to reach the best results. AlphaEarth embeddings show much weaker burned and unburned separability, and downstream models require substantially more spatial modeling to reach their best performance. This divergence is not specific to our setting. A concurrent, independent evaluation of both embedding products for burned area classification in Portugal, using different reference perimeters and pixel-level classifiers, likewise found Tessera consistently stronger than AlphaEarth (Silva and Gonçalves, 2026), and on the 17 European fires common to our study and that of Seydi (2025), a single-year Tessera model exceeded their bi-temporal AlphaEarth network (Section S7 of the Supplementary Material). In contrast, the two models perform comparably on many other tasks (Ball et al., 2026), with AlphaEarth performing better on some (Liu et al., 2026a; van der Plas et al., 2026). Most of those benchmarks target environmental states or properties, such as land cover, vegetation structure, biomass, or crop type. Burned area mapping instead asks whether the representation preserves a discrete disturbance event within an annual summary, and for this task the two models diverge sharply.

Both representations capture high-severity burns well, but the gap widens for lower-severity burns. Using out-of-fold Lightweight U-Net predictions across all 793 benchmark chips, false-negative rates for high-severity pixels were 0.1% for Tessera and 0.8% for AlphaEarth, but rose to 10.8% and 29.0%, respectively, for low-severity pixels (Table S5 of the Supplementary Material). AlphaEarth therefore appears able to identify high-severity burned areas reliably, but struggles increasingly as burn severity decreases. Because low-severity pixels make up the majority of burned area in our

benchmark, this weakness likely contributes substantially to its lower aggregate performance.

The two embedding models also responded differently when the temporal input was expanded beyond the fire year (Figure 13). In a three-fold Random Forest ablation, using all three years as a concatenated input, $[E_{-1}, E_0, E_{+1}]$, improved AlphaEarth F1 from 0.583 to 0.682, while leaving Tessera essentially unchanged (0.840 to 0.855). Providing the pre-fire and fire-year embeddings together with their explicit difference, $[E_{-1}, E_0, E_0 - E_{-1}]$, produced the strongest AlphaEarth result (F1 = 0.731), while again providing only a modest improvement for Tessera (F1 = 0.857). Interestingly, using only the pre- and post-fire years, $[E_{-1}, E_{+1}]$, performed similarly to E_0 alone for AlphaEarth (F1 = 0.599 versus 0.583), whereas for Tessera it substantially reduced performance (0.676 versus 0.840). This emphasizes the importance of E_0 for Tessera and the greater benefit of cross-year context for AlphaEarth. Together with the latent-space analysis, these results are consistent with Tessera encoding the disturbance itself prominently within the annual representation that contains the event, whereas AlphaEarth appears to benefit more from information distributed across annual representations. Complete results are provided in Section S9 of the Supplementary Material.

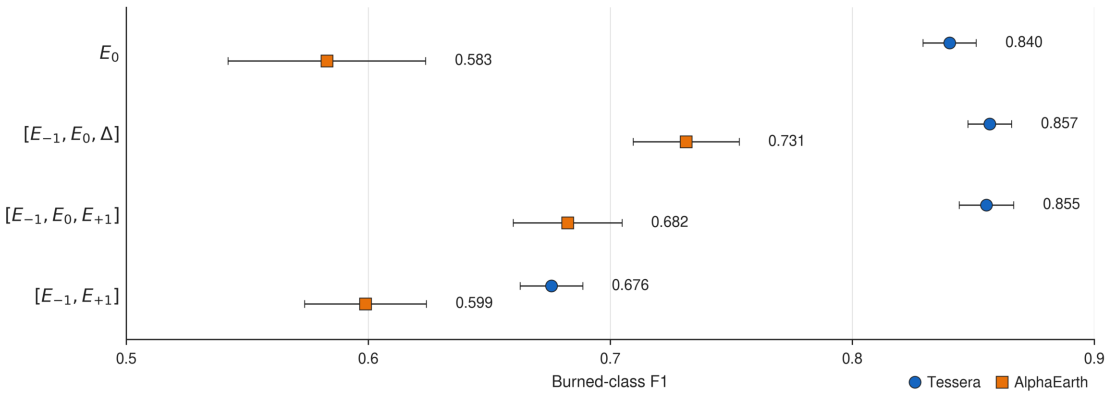


Figure 13: Effect of multi-year temporal context on burned-class F1 for Tessera and AlphaEarth. Points show means across three spatial cross-validation folds; error bars indicate ± 1 standard deviation. E_{-1} , E_0 , and E_{+1} denote the years before, containing, and after the fire, respectively, and $\Delta = E_0 - E_{-1}$. Full details are provided in Section S9.

The source of this difference remains unclear, as the models differ in training data, input sensors, spatial context, architecture, loss functions, temporal sampling, and training targets. One notable pattern is that adding spatial context through U-Net models improved performance much more for AlphaEarth than for Tessera, despite AlphaEarth embeddings already containing patch-level spatial context. The pattern suggests that when a pixel’s annual trajectory already contains a clear disturbance signal, strong temporal encoding reduces dependence on spatial decoding. AlphaEarth’s latent projections also seem more strongly organized by land cover in the fire year, which may partly reflect differences in training objectives, including its use of land-cover information as a target. Without systematic ablations, however, we cannot attribute the observed differences to any single design choice. Future work should isolate the effects of spatial context, temporal sampling, input modalities, training targets, and loss functions to determine what makes annual embeddings more

sensitive to abrupt disturbance.

5.3 Annual embeddings match paired pre- and post-fire imagery for burned-area delineation

Annual embeddings substantially simplify burned area mapping workflows by moving data preparation and temporal reasoning upstream into a reusable representation. Precomputed embeddings can be downloaded directly for a region and year of interest, without requiring the downstream user to perform cloud masking, image filtering, dense time-series processing, or task-specific feature construction. The experiments in this study showed that, once this representation is available, a single fire-year embedding paired with simple downstream models can map burned area as accurately as paired pre- and post-fire imagery, while also retaining enough temporal information to recover the approximate date of the event.

The contrast is clearest against event-specific burned area delineation. These approaches require carefully selected cloud-free, well-timed post-fire imagery, and sometimes paired pre-fire imagery. This selection is not trivial: it requires knowing where and approximately when a fire occurred, and it must balance cloud contamination, image quality, and vegetation-dependent recovery timing. An image acquired too long after a grassland or shrubland fire may show a landscape that has already recovered, while one acquired too early may capture a fire still in progress, as for the Lions Fire in Figure 5. Poor segmentation performance can then reflect either an inadequate model or a poorly chosen input, and the two sources of error are difficult to separate. Crucially, image selection is required not only for training but also at inference, so these models cannot be applied to an arbitrary landscape unless suitable post-fire images have first been identified. This limits the scalability of event-specific workflows. An embedding workflow uses the same input everywhere: the precomputed annual embedding.

This simplicity comes at the cost of latency. Current annual embedding products are generated only after the annual observation period is complete, so they cannot support within-season or near-real-time burned area mapping in the way that online time-series or event-specific imagery workflows can. Their current strength is therefore retrospective, large-scale mapping rather than rapid fire monitoring.

Silva and Gonçalves (2026) found a different ranking in Portugal, where a pre- and post-fire Sentinel-2 baseline outperformed pixel-level classifiers on Tessera embeddings ($F1 = 0.895$ vs. 0.860). Our two studies differ in scale and evaluation design: their study used 20 fires and evaluated point samples drawn from a ring immediately surrounding each perimeter, whereas ours used 559 single-fire chips and evaluated every pixel across 15 km chips. Their results also illustrate the single-fire reference problem that motivated our protocol: in their largest mapped example, most of the apparent false positives coincided with another 2024 fire. While the relative ranking may depend on dataset scale and evaluation design, the two studies agree on the essential point: annual Tessera embeddings approach or match fire-specific pre/post workflows without event-specific image construction.

5.4 Annual embeddings support regional mapping, but precision limits wall-to-wall deployment

Annual embeddings also simplify the operational problem of mapping all burned area within a year. Dense time-series approaches traverse many observations to identify candidate events, compare pre- and post-fire conditions, and merge duplicate detections across consecutive images that all carry the burn signal. Annual embeddings collapse this temporal search into a single representation for the summary period. The temporal reasoning is not eliminated, but shifted upstream into the foundation model and made reusable across downstream tasks. In the benchmark, the Tessera Lightweight U-Net maintained almost the same accuracy when the target expanded from the single benchmark fire to all same-year burned area within each chip ($F1 = 0.911$ vs. 0.896), while recovering additional fires absent from the original single-fire labels.

The California experiment shows why this matters at medium spatial resolution. A model trained entirely outside the state detected substantially more small and medium-sized fires than GABAM or MCD64A1, while maintaining high spatial agreement for larger events. More strikingly, manual inspection of the largest unmatched predictions identified genuine fires absent from both MTBS and CAL FIRE, despite California having unusually comprehensive fire inventories. This reinforces the motivation for medium-resolution regional products: finer mapping improves the delineation of known fire perimeters and can also recover smaller events missed by coarser products or incomplete inventories.

Wall-to-wall deployment nevertheless exposes a challenge that is largely hidden in fire-centred benchmarks: the model must distinguish wildfire from the full range of non-fire trajectories encountered across a landscape. Mature burned area products devote substantial processing to suppressing commission errors through temporal, spectral, land-cover, and spatial constraints. The wall-to-wall inference in this study applied no comparable precision-oriented filtering: the model was evaluated out of the box, with no statewide negative sampling and minimal post-processing. Although statewide pixel-level precision remained comparable to MCD64A1, Tessera produced substantially more unmatched components. The comparison should therefore not be read as a benchmark between equivalent products, but between mature pipelines with explicit mechanisms for suppressing commission errors and a lightweight U-Net trained on fire-centred chips outside California.

That such a minimal pipeline matched a mature product on statewide pixel-level precision while detecting far more small fires is the encouraging half of the result: Tessera embeddings encode a transferable burned area signal. The remaining challenge is controlling the larger number of unmatched detections without sacrificing that small-fire sensitivity, and the structure of the errors suggests this may be tractable. Confirmed false positives were concentrated in snow-covered high-elevation terrain in the southern Sierra Nevada, the hills surrounding Los Angeles, and agricultural regions, consistent with non-fire trajectories that were poorly represented in fire-centred training data. Errors of this kind appear amenable to targeted improvements rather than requiring a different representation altogether.

5.5 Annual embeddings retain approximate intra-annual event timing

The timing experiment shows that annual Tessera embeddings retain recoverable information about when a fire occurred within the year, even though the embedding is a single annual representation rather than an explicit time series. This is likely a consequence of how Tessera summarizes temporal observations: every Sentinel-1 and Sentinel-2 input is associated with its day of year during both training and inference, so the model can encode not only that a trajectory was disturbed, but where within the annual sequence the disturbance occurred. A pixel that burns in March, July, or November follows a different yearly trajectory even if all three end the year in a burned state, and the timing results indicate that some of this temporal ordering survives in the annual summary. A US-trained model dated European fires to within 10.5 days on average, which suggests that the encoded timing is not specific to US fire regimes.

Event dating matters operationally: burned area products are expected to report not only where fires occurred but also when. Timing supports analysis of seasonal and climatic fire patterns and evaluation of policies that restrict burning during periods of elevated fire risk. Many existing burned area products derive timing from dense observation sequences, whereas annual composites provide much coarser temporal information. Annual embeddings sit between these approaches: they do not preserve the full observation sequence, yet they retain substantially more timing information than a conventional annual composite.

Event dating is tightly coupled to disturbance detection, as it is in any remote sensing approach. A dense time-series method that never registers a burn signal cannot identify the first burned observation, and an embedding-based pipeline that fails to detect a burned area has no event to date. For annual embeddings, the additional constraint is that the relevant temporal information must have been preserved during representation learning. This is visible for late-season fires, where burned area recall declines and predicted day of year is underestimated for fires that remain detected. Timing from annual embeddings should therefore be interpreted as conditional on the disturbance being both detected and sufficiently encoded in the annual representation.

A final caveat concerns the reference labels. The ground truth assigns a single ignition day of year to every pixel within a fire perimeter, even though large fires spread over days or weeks; the model was trained on these approximate pixel-level labels and evaluated after averaging pixel predictions to the fire level. This is a practical first test rather than true per-pixel burn dating, and future work should distinguish ignition date, pixel-level burn date, and the full active fire period, possibly through object-level formulations rather than per-pixel regression. The present results should be read as evidence that approximate intra-annual timing is recoverable from annual embeddings, laying the foundation for more detailed timing estimation.

5.6 Late-season fires and the limits of calendar-year summaries

Models trained on Tessera embeddings mapped burned area accurately across most of the fire season, but recall declined sharply for fires that ignited late in the calendar year, particularly in November and December. A similar but weaker late-season decline was apparent with AlphaEarth. For both embedding products, the association between later ignition date and lower recall persisted after ac-

counting for fire characteristics and geography. This pattern is therefore consistent with a limitation related to annual temporal summarization, although its effect was more pronounced for Tessera.

The practical impact of this limitation depends on geography. In California, relatively few fires occur in the final weeks of the calendar year, so only a small share are affected. But in regions where the fire season may span the calendar-year boundary, such as southern Australia (Williams et al., 2012), a substantial share of fires could fall in the poorly encoded end-of-year window. A 12-month summary is a sensible default, but its alignment to the calendar year is arbitrary, and it aligns with some fire regimes far better than others.

Why do annual embeddings encode late-season fires poorly? The most direct explanation is limited observational support: a November fire leaves only weeks of post-fire observations within the summary window, and our results confirmed that accuracy degrades severely when no cloud-free post-fire imagery is available. Observation scarcity does not explain every failure, however. Several late-season fires had cloud-free post-fire images and were still poorly detected, suggesting that a short post-fire period may produce a disturbance signature too weak to shape the annual summary. Inference-time sampling may compound this: Tessera v1 randomly samples 40 observations per pixel, so the few post-fire observations available after a late-season fire may be sparsely sampled or missed entirely. This sampling strategy has changed in later Tessera versions (Feng et al., 2026b), which may improve late-season encoding. Finally, the pre-training data may under-represent late-season fires in US ecosystems, biasing the model toward mid-year disturbance; however, this cannot be assessed from the present experiments. Future work should establish whether the late-season failure is specific to US fire regimes, how it behaves in Southern Hemisphere fire seasons, and whether it can be mitigated by shifting the summary window or by pre-training on data with greater temporal diversity and more examples of change and disturbance.

6 Conclusions

This study asked whether annual Earth-observation embeddings encode wildfire disturbance well enough to map burned area without curated post-fire imagery or dense time-series processing. For Tessera, the answer to each of the questions posed in the Introduction is largely yes. Wildfire disturbance is a dominant, directly readable feature of the fire-year embedding; a single embedding matched paired pre- and post-fire imagery for delineating individual burn scars; the same models mapped all same-year fires within a landscape, an unseen region, and another continent without retraining; and the embedding retained enough temporal structure to date detected fires to within about two weeks. AlphaEarth encodes the same disturbance more weakly, and extracts it best when spatial context or explicit temporal contrast is supplied downstream.

Embeddings therefore offer elements of both families of approaches: they can approach the delineation accuracy of event-specific methods without curated post-fire imagery, while supporting wall-to-wall mapping without dense temporal processing at the downstream stage. Additional complexity can still be layered on through spatial decoders, multi-year inputs, calibration, or post-processing, but even the simple pipeline evaluated here produces competitive burned area maps.

Several limitations remain. Fires that ignite in the last weeks of the calendar year are poorly en-

coded by annual summaries aligned to the calendar year, and current annual embedding products are inherently retrospective: the full representation is not available until the annual observation period is complete. Wall-to-wall application also produced substantially more suspected false positives than mature burned area products, although these represented only a small share of predicted burned area and manual inspection showed that some were genuine fires absent from the reference datasets. Operational deployment would require additional calibration, more diverse negative examples, and post-processing to distinguish wildfire from other fire-like trajectories; training on unburned areas that experienced other kinds of change, which recent work has shown to substantially improve precision (Liu et al., 2026b), is particularly promising. Stable embedding products and clear versioning will also be important, since new releases may require downstream models to be retrained or recalibrated. Whether the disturbance sensitivity shown here for wildfire extends to disturbance more generally remains an open question for future work.

Data availability

The source datasets used in this study are publicly available from the sources cited in the manuscript. The derived data and code supporting the findings can be made available upon request.

Declaration of competing interest

Clement Atzberger is affiliated with dClimate, a commercial company that has independently invested resources in generating a global 2017–2025 archive of Tessera v1.1 embeddings and making it available through AWS Open Data. The present study used Tessera v1 embeddings and did not use the v1.1 archive. The remaining authors declare no competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgments

We thank Samuel Barrett, Anil Madhavapeddy, Aneesh Naik and Sadiq Jaffer for their careful reading of earlier versions of the manuscript and their constructive comments and discussions.

This work was made possible by openly available Earth-observation data and products. We gratefully acknowledge the European Space Agency and the Copernicus Programme for Sentinel-1 and Sentinel-2 data; NASA for Harmonized Landsat–Sentinel and MODIS data; the USDA Forest Service and US Geological Survey for Monitoring Trends in Burn Severity data; CAL FIRE for the Fire and Resource Assessment Program fire-perimeter database; and the Copernicus Emergency Management Service for the Rapid Mapping products. We also acknowledge the teams responsible for GABAM, LCMAP, RESOLVE Ecoregions, Tessera, and AlphaEarth Foundations; the GeoTessera developers and the Taylor Geospatial Institute and Source Cooperative for facilitating access to the annual embeddings; and Google Earth Engine for providing access to data and computational resources.

We acknowledge support from the Tezos Foundation and the UKRI-funded AI4ER doctoral training programme.

CRediT authorship contribution statement

Jovana Knezevic: Conceptualization, Methodology, Software, Data curation, Formal analysis, Investigation, Validation, Visualization, Project administration, Writing – original draft, Writing – review & editing. **Clement Atzberger:** Conceptualization, Methodology, Writing – review & editing. **Zhengpeng Feng:** Methodology, Writing – review & editing. **Adam F. A. Pellegrini:** Methodology. **Srinivasan Keshav:** Conceptualization, Supervision, Writing – review & editing, Resources. **David Coomes:** Conceptualization, Supervision, Writing – review & editing, Resources.

Declaration of generative AI and AI-assisted technologies in the writing process

During the preparation of this work, we used ChatGPT (OpenAI) and Claude models (Anthropic) accessed through Cursor for coding assistance, and for editing and providing feedback on author-drafted text. All outputs were reviewed, validated and revised as needed, and the authors take full responsibility for the content of the publication.

Supplementary Material

Annual Earth-observation embeddings encode wildfire disturbance and support simplified burned area mapping

S1 Paired pre- and post-fire HLS baseline

S1.1 Pre-fire HLS composite construction

We generated pre-fire imagery from HLS Sentinel-2 (S30) v2.0 surface reflectance (NASA/HLS/HLSS30/v002). Only S30 observations were used. For each chip, the MTBS ignition date (`ig.date`) associated with the target fire was used to define the pre-fire period. We initially queried observations within the interval $[t_{\text{ign}} - 30 \text{ days}, t_{\text{ign}}]$, thereby excluding observations acquired on or after the ignition date. If valid coverage across the full chip remained below 95%, the search window was extended to 60 days before ignition.

We retained scenes intersecting the chip geometry and with granule-level `CLOUD_COVERAGE` $< 50\%$. At the pixel level, observations were masked when any of HLS Fmask bits 0–4 were set, corresponding to cirrus, cloud, adjacent-to-cloud, cloud shadow, or snow/ice. The six surface-reflectance bands used were Blue, Green, Red, NIR, SWIR1, and SWIR2, corresponding to S30 bands B2, B3, B4, B8A, B11, and B12. HLS surface-reflectance values were converted to floating point using the scale factor 0.0001 and were not clipped to the $[0, 1]$ interval. Masked values were retained as missing (NaN).

The remaining observations were combined using a temporally weighted medoid. For each pixel, we first calculated the temporal median independently for each of the six bands. For observation i , spectral distance from this median was then calculated as

$$d_i = \sum_{b=1}^6 (x_{i,b} - \tilde{x}_b)^2, \quad (\text{S1})$$

where $x_{i,b}$ is the reflectance of band b in observation i , and $\tilde{x}_b$ is its temporal median. Observations were additionally weighted according to their temporal distance from ignition,

$$w_i = \frac{1}{\max(\Delta t_i, 1)}, \quad (\text{S2})$$

where Δt_i is the number of days between the observation and ignition. The quality score used for medoid selection was proportional to

$$q_i = \frac{1}{d_i/w_i}, \quad (\text{S3})$$

thereby favouring observations that were both spectrally representative of the pre-fire period and closer to the ignition date. The highest-quality observation was selected independently for each pixel, with all six bands retained from the same acquisition. Where a medoid observation could not be obtained, we used the per-band temporal median as a fallback.

For chips that still contained less than 95% valid coverage after the 60-day search, we repeated

the 60-day compositing procedure without the granule-level cloud-coverage filter while retaining the per-pixel Fmask criteria. Chips that already satisfied the coverage criterion were not regenerated.

Pre-fire composites were exported as 512×512 pixel GeoTIFFs at 30 m resolution in the UTM projection and spatial footprint of the corresponding benchmark chip. The composite construction was implemented in `export_chip_prefire_hls_composite.py`.

S1.2 Post-fire imagery and HLS versions

Post-fire imagery was taken directly from the HLS Burn Scars benchmark and corresponds to the benchmark-provided HLS S30 v1.4 merged imagery. We retained these images rather than reconstructing the post-fire observations from HLS v2.0 in order to preserve the event-specific imagery and acquisition dates used in the original benchmark.

Equivalent pre-fire imagery is not provided by the benchmark, and the pre-fire composites described above were therefore generated separately from HLS S30 v2.0. Consequently, the paired baseline combines v2.0 pre-fire imagery with v1.4 post-fire benchmark imagery, with the same version pairing used throughout training and evaluation.

Both pre- and post-fire source chips contained six 30 m surface-reflectance bands over the same 512×512 pixel footprint. Prior to model input construction, both were aligned to the common PANGAEA 10 m grid, producing arrays of $1536 \times 1536 \times 6$ pixels.

S1.3 Paired model input

For the `hls_pre_post_diff` configuration used in the main comparison, we constructed a 21-channel input consisting of:

- six post-fire reflectance bands;
- six pre-fire reflectance bands;
- post-fire NBR and pre-fire NBR;
- differenced NBR,

$$\text{dNBR} = \text{NBR}_{\text{pre}} - \text{NBR}_{\text{post}}; \quad (\text{S4})$$

- six band-wise reflectance differences,

$$\Delta B = B_{\text{pre}} - B_{\text{post}}. \quad (\text{S5})$$

Thus, the paired baseline supplied the downstream model with both the two fire-specific observations and explicit spectral-change features. The post-fire-only HLS baseline used only the six benchmark post-fire reflectance bands.

S1.4 Input validity and missing pixels

Chips were retained for the paired comparison when both pre- and post-fire inputs contained more than 80% valid pixels. Of the 577 eligible single-fire chips, 18 failed this criterion, leaving 559 chips for the paired comparison. Missing coverage among retained chips was generally negligible: median invalid coverage was 0% for both inputs, while mean invalid fractions were 0.29% for the pre-fire composites and 0.16% for the post-fire imagery. Only 9 of 559 retained chips contained more than 10% invalid coverage in either input.

Pixels containing non-finite input features were excluded when constructing training samples. During full-chip inference, pixels for which the required input features were invalid were assigned an unburned prediction. Pixels marked as nodata in the MTBS reference were excluded from accuracy evaluation.

S2 Additional methods and label refinement details

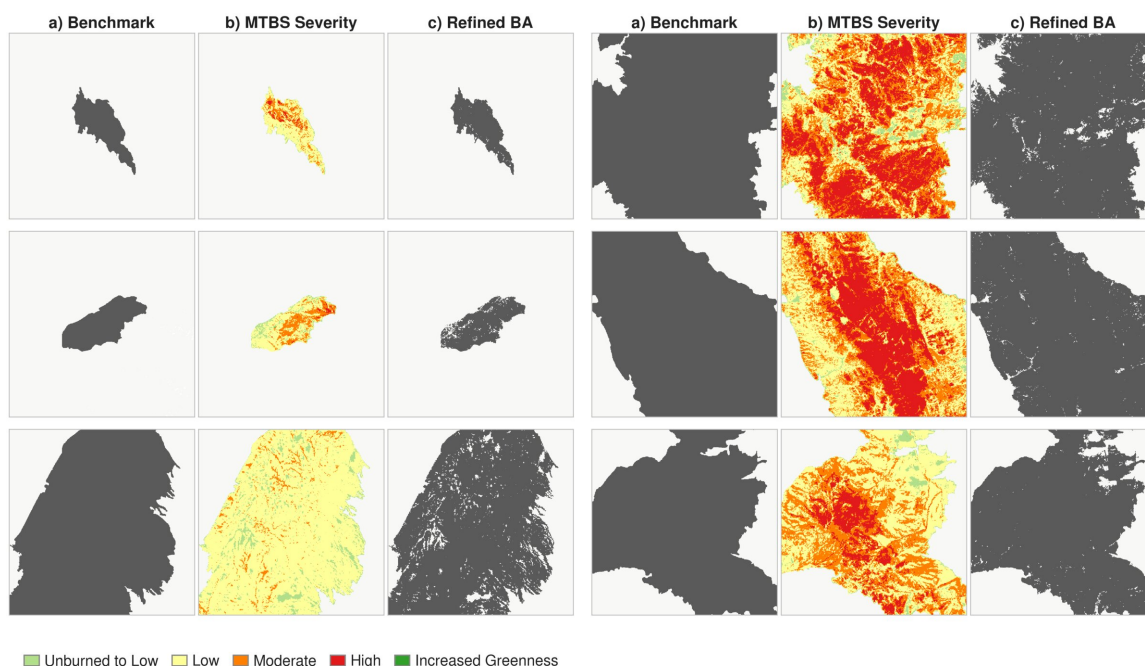


Figure S1: Examples of HLS Burn Scars benchmark labels and their refinement using MTBS burn-severity data. For each example, columns show the original benchmark burned area mask, the corresponding MTBS burn-severity mosaic, and the refined binary burned area mask used in this study. MTBS severity classes 2 (low), 3 (moderate), and 4 (high) were treated as burned, while classes 0 (unburned), 1 (unburned to low), and 5 (increased greenness) were treated as unburned. The examples illustrate how severity-based refinement removes unburned and spectrally ambiguous areas contained within the original benchmark masks.

S3 Downstream model implementation

The downstream models used throughout the burned area mapping experiments comprised L2-regularized logistic regression, Random Forest (RF), a standard U-Net, and a lightweight U-Net. The main model configurations are summarized in Table 2 of the main text; additional implementation details are provided here.

Logistic regression. Logistic regression was implemented using scikit-learn. Input features were standardized using `StandardScaler`, fitted on the training data and applied to the corresponding validation and test data. We used L2 regularization with $C = 1$ and balanced class weights.

Random Forest. RF was implemented using scikit-learn with 200 trees and no class weighting. At each split, $\sqrt{d}$ of the d input features were considered. Tree depth was unrestricted, with a minimum of five samples per leaf and ten samples required to split an internal node.

Standard U-Net. The standard U-Net was implemented using the `segmentation_models_pytorch` library with a ResNet-18 encoder initialized from random weights, without ImageNet pretraining. The decoder contained five stages with 256, 128, 64, 32, and 16 channels, respectively. The resulting model contained approximately 14.5 million trainable parameters.

The model was trained using AdamW with an initial learning rate of 10^{-4} , weight decay of 10^{-4} , and cosine learning-rate annealing to 10^{-6} . The loss function was the sum of binary cross-entropy and Dice loss. Training used mixed precision and gradient clipping with a maximum norm of 1.0. Models were trained with a batch size of 32 for up to 50 epochs, with early stopping after 10 epochs without improvement in validation loss. Training samples consisted of 256×256 pixel crops, with eight crops randomly sampled from each training chip per epoch. Random horizontal and vertical flips were used for data augmentation.

Lightweight U-Net. The lightweight U-Net was implemented as a custom three-level encoder-decoder with skip connections and a base channel width of 32. Each convolutional block used 3×3 convolutions followed by batch normalization and ReLU activation. Spatial downsampling was performed using max pooling, while the decoder used bilinear upsampling followed by concatenation with the corresponding encoder features. A 1×1 convolutional classification head produced the final per-pixel output. The model contained approximately 0.87 million trainable parameters.

The lightweight U-Net used the same loss function, optimizer, learning-rate schedule, weight decay, augmentation, mixed-precision training, gradient clipping, crop-sampling strategy, and early-stopping criterion as the standard U-Net. The only difference in the training configuration was a larger batch size of 64.

S4 Additional 2D projections

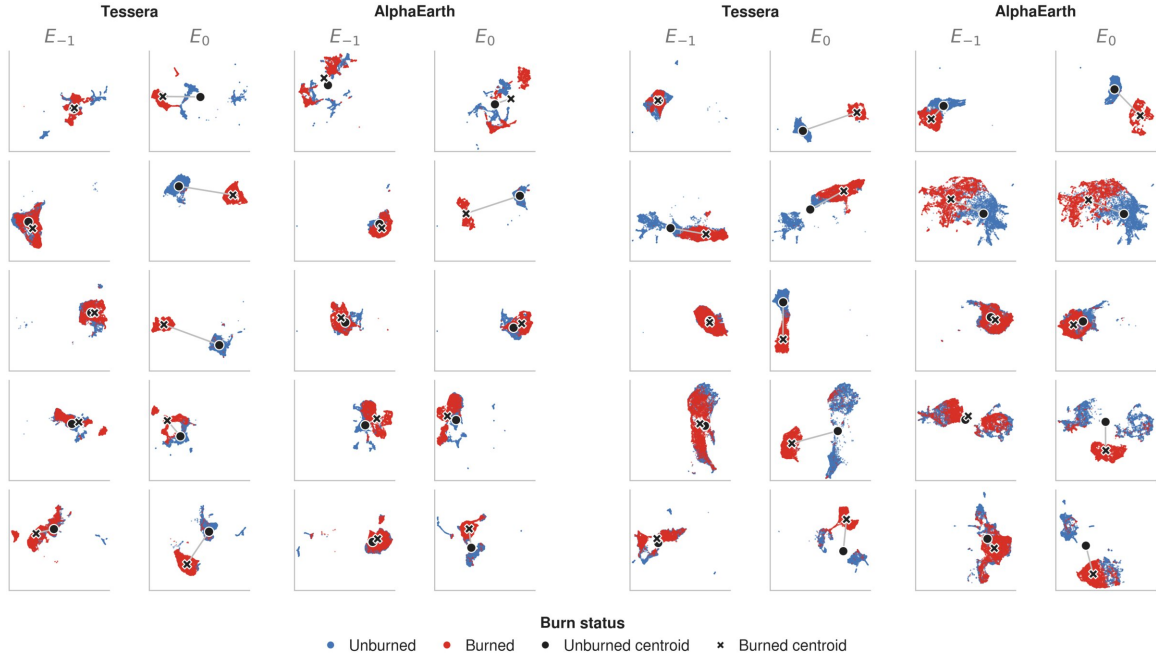


Figure S2: Nonlinear UMAP projections for a sample of 10 randomly selected chips. For each embedding product, UMAP was fitted jointly to the pre-fire (E_{-1}) and fire-year (E_0) embeddings. Points are coloured by burn status; markers show the burned and unburned centroids.

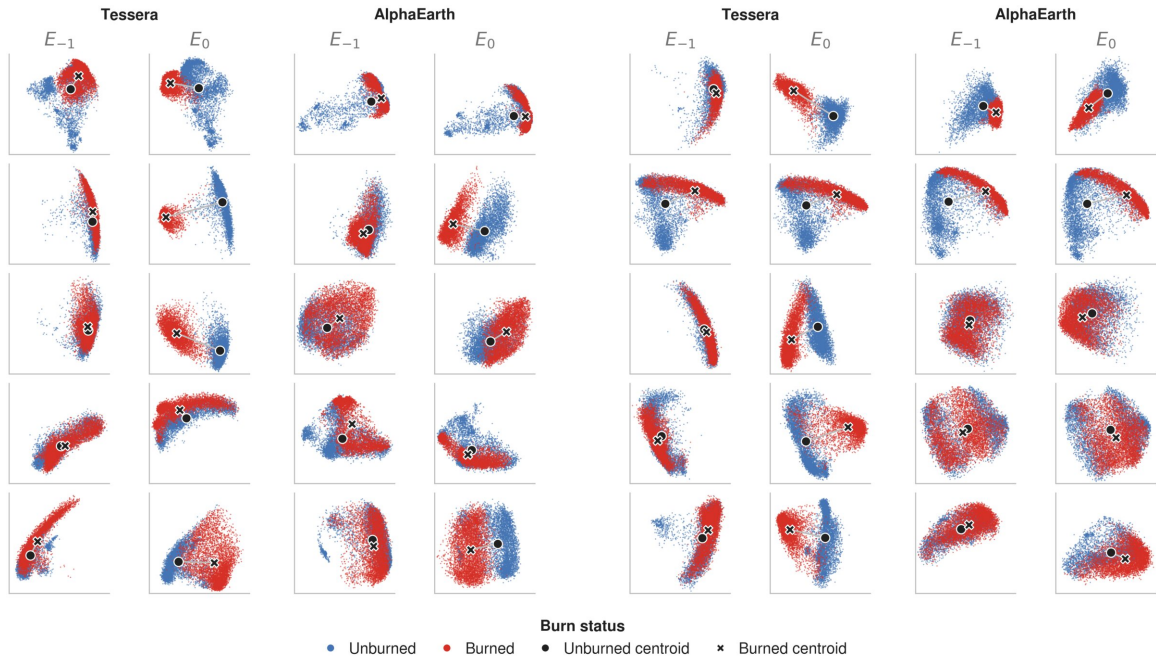


Figure S3: PCA projections for a sample of 10 randomly selected chips. For each embedding product, PCA was fitted jointly to the pre-fire (E_{-1}) and fire-year (E_0) embeddings. Points are coloured by burn status; markers show the burned and unburned centroids.

S5 Single-fire delineation metrics

S6 Late-season fires analysis

To assess whether the decline in recall for fires igniting late in the calendar year could be explained by differences in fire characteristics or geography, we fitted separate quasi-binomial generalized additive models for each embedding product and downstream model. The analysis used one observation per unique MTBS fire event, with each fire weighted equally. Fires intersecting overlapping chips were excluded because detected pixels could not be assigned unambiguously, leaving 1,031 fires across 51 ecoregions. Recall was modelled as a penalized smooth of the number of days remaining in the calendar year after ignition, with an additional smooth for log fire area and adjustment for the proportion of moderate- or high-severity burned area, incident type, dominant pre-fire land cover, biome, and cross-validation fold. Adjusted recall curves were obtained by predicting each fire across the timing range while retaining its observed values for all other covariates, and then averaging these predictions across fires. Confidence intervals were estimated from 1,000 bootstrap resamples clustered by ecoregion. To avoid poorly supported estimates at the calendar-year boundaries, fitted curves and contrasts were restricted to the 2nd–98th percentile of observed ignition timing.

S6.1 Results

Fire-level recall declined sharply for fires ignited late in the calendar year, for both Tessera and AlphaEarth. Adjustment for fire characteristics, land cover, biome, and cross-validation fold changed this relationship only modestly (Figure S4). For Tessera, adjusted recall was 0.51 at 60 days remaining in the year and 0.84 at 180 days for the Random Forest, a difference of -0.33 (95% CI: -0.42 to -0.26); for the Light U-Net the corresponding estimates were 0.64 and 0.85, a difference of -0.21 (-0.33 to -0.15). AlphaEarth recall was lower throughout the year, with mid-year values of 0.69 and 0.64 rather than 0.84 and 0.85, and showed declines of comparable size (-0.21 , -0.34 to -0.10 , for the Random Forest; -0.27 , -0.36 to -0.15 , for the Light U-Net). Results with the Lightweight U-Net showed the same late-season limitation for Tessera but stronger model-dependent seasonal variation for AlphaEarth (Figure S4). The decline also persisted when the analysis was restricted to wildfires in every case, with differences of -0.14 to -0.19 , indicating that it was not explained by the seasonal distribution of prescribed fires. Detection of late-season fires is therefore a shared limitation of the analyzed annual embeddings, and a key consideration for operational use.

Table S1: Single-fire burned area delineation on 559 chips with more than 80% valid pre- and post-fire HLS coverage, evaluated with spatially blocked three-fold cross-validation. Metrics are burned-class scores from full-chip pooled evaluation (fold mean $\pm$ std). MTBS severity classes 1 and 5 were counted as unburned. Tessera, AlphaEarth, and post-fire HLS results were re-evaluated on this cohort; the pre- and post-fire HLS baseline was trained on it originally.

Input	Model	Folds	Accuracy	F1	IoU	Precision	Recall
Tessera	LogReg	3	0.947 ± 0.003	0.791 ± 0.013	0.655 ± 0.017	0.704 ± 0.016	0.903 ± 0.015
	RF	3	0.971 ± 0.002	0.870 ± 0.014	0.771 ± 0.023	0.857 ± 0.013	0.884 ± 0.019
	Light	3	0.980 ± 0.002	0.911 ± 0.011	0.837 ± 0.019	0.897 ± 0.014	0.927 ± 0.010
	U-Net	3	0.981 ± 0.001	0.916 ± 0.008	0.845 ± 0.014	0.903 ± 0.012	0.930 ± 0.014
AlphaEarth	LogReg	3	0.728 ± 0.021	0.386 ± 0.025	0.239 ± 0.020	0.258 ± 0.021	0.769 ± 0.017
	RF	3	0.892 ± 0.004	0.585 ± 0.013	0.414 ± 0.013	0.508 ± 0.012	0.691 ± 0.014
	Light	3	0.949 ± 0.002	0.765 ± 0.019	0.620 ± 0.025	0.778 ± 0.014	0.753 ± 0.024
	U-Net	3	0.960 ± 0.003	0.806 ± 0.021	0.676 ± 0.030	0.872 ± 0.027	0.750 ± 0.023
Post-fire HLS	LogReg	3	0.897 ± 0.004	0.650 ± 0.016	0.482 ± 0.018	0.520 ± 0.015	0.868 ± 0.022
	RF	3	0.910 ± 0.006	0.679 ± 0.011	0.514 ± 0.012	0.560 ± 0.015	0.862 ± 0.026
	Light	3	0.967 ± 0.003	0.856 ± 0.010	0.748 ± 0.016	0.837 ± 0.019	0.875 ± 0.016
	U-Net	3	0.969 ± 0.002	0.860 ± 0.011	0.755 ± 0.017	0.850 ± 0.012	0.871 ± 0.025
Pre- and post-fire HLS	LogReg	3	0.947 ± 0.002	0.791 ± 0.011	0.654 ± 0.015	0.701 ± 0.013	0.906 ± 0.011
	SRF	3	0.949 ± 0.006	0.798 ± 0.024	0.665 ± 0.033	0.706 ± 0.032	0.920 ± 0.010
	Light	3	0.976 ± 0.004	0.896 ± 0.015	0.812 ± 0.025	0.872 ± 0.017	0.921 ± 0.017
	U-Net	3	0.979 ± 0.003	0.905 ± 0.011	0.827 ± 0.019	0.890 ± 0.020	0.921 ± 0.007

RF = Random Forest; LogReg = Logistic Regression.

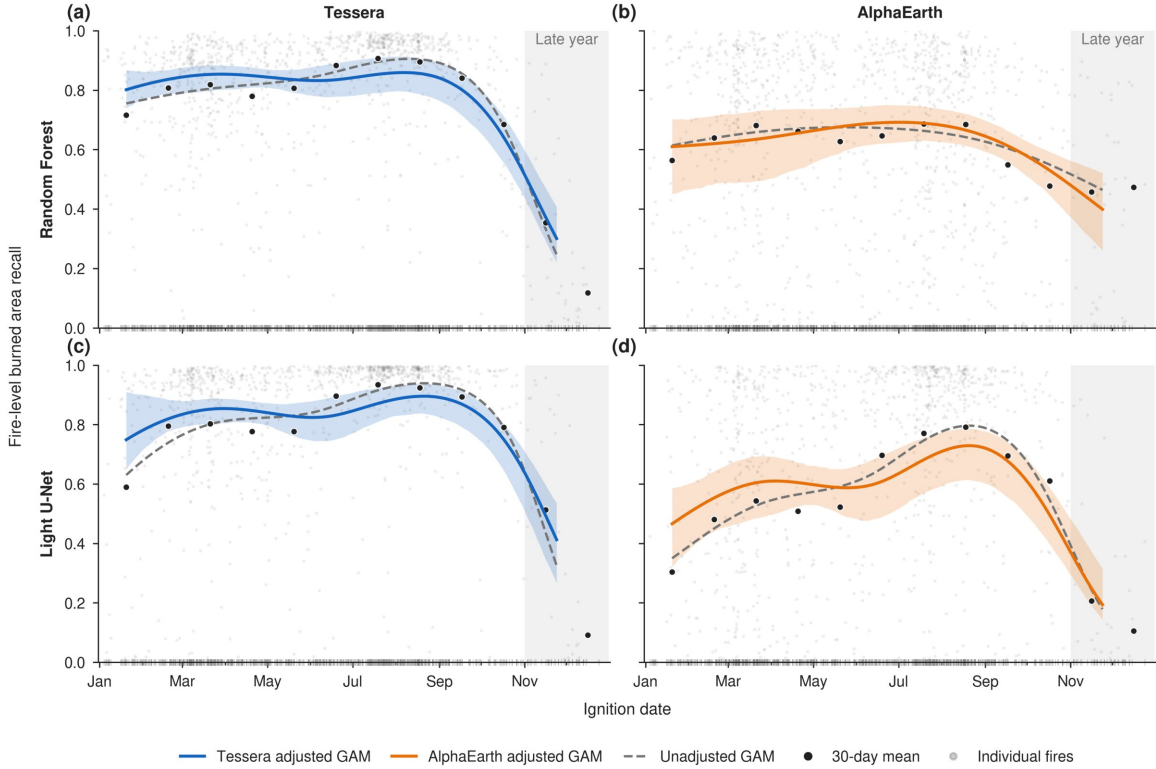


Figure S4: Fire-level burned area recall against ignition date: (a) Tesseract and (b) AlphaEarth with the Random Forest; (c) Tesseract and (d) AlphaEarth with the Light U-Net. The models were fitted on the same 1,031 MTBS fire events. Faint grey points are individual fires and the rug beneath each axis shows their timing distribution; black points are observed mean recall in 30-day bins. The dashed grey line is the unadjusted GAM of recall on ignition timing alone; the coloured line is the adjusted GAM, with a 95% ecoregion cluster bootstrap interval as the band. Adjusted curves are standardized average marginal predictions: predicted recall averaged over all fires with fire size, severity, incident type, pre-fire land cover, biome and cross-validation fold held at their observed values.

S7 Contextual comparison with the AlphaEarth transfer results of Seydi

We additionally evaluated Tesseract on the 17 European EMSR fires used by Seydi (Seydi, 2025) to provide a contextual comparison with the published AlphaEarth transfer experiment. Fifteen of these fires are from 2024 and are included in our main 88-fire European evaluation; the remaining two are from 2022 and were downloaded separately for this comparison. This analysis is therefore distinct from the main 2024–2025 transfer experiment.

On the 17 EMSR fires previously evaluated by Seydi (Seydi, 2025), the Tesseract model exceeded the published AlphaEarth transfer result despite using a simpler input and classifier. Both approaches trained on US fires with MTBS labels and evaluated on the common set of European fires. However, Seydi used a bi-temporal Siamese U-Net over two consecutive years of AlphaEarth

embeddings (Seydi, 2025), whereas our model used a single fire year Tessera embedding with a 0.87M-parameter lightweight U-Net. Tessera reached $F1 = 0.828 \pm 0.180$ and $IoU = 0.737 \pm 0.195$, compared with 0.735 ± 0.186 and 0.612 ± 0.220 for AlphaEarth (Table S2). The gain came mainly from recall (0.894 vs 0.749), with precision nearly unchanged (0.824 vs 0.806), indicating that the single-year Tessera embedding recovered more of each burn scar without a comparable loss in precision.

Table S2: Contextual comparison with Seydi (2025) on a European EMSR subset of 17 fires ($n = 17$). Both methods are trained on US fires and evaluated on the same European EMSR subset; metrics are reported as mean $\pm$ standard deviation across fires. Seydi results are taken from the published AlphaEarth transfer experiment.

Approach	Representation	Precision $\uparrow$	Recall $\uparrow$	F1 $\uparrow$	IoU $\uparrow$
Seydi (2025)	AlphaEarth	0.806 ± 0.211	0.749 ± 0.231	0.735 ± 0.186	0.612 ± 0.220
This study	Tessera	0.824 ± 0.113	0.894 ± 0.210	0.828 ± 0.180	0.737 ± 0.195

The one clear outlier, EMSR638 ($F1 = 0.18$), is the only November–December fire in the European dataset, matching the late-season encoding limitation identified in the annual fire mapping experiment.

S8 Contextual comparison with PANGAEA results

S8.1 Methods

The HLS Burn Scars benchmark was originally created for the evaluation of the Prithvi foundation model (Jakubik et al., 2023), and later adopted as a change detection task in the PANGAEA benchmark (Marsocci et al., 2024). We compared annual embedding performance on the HLS Burn Scars benchmark with published results from the PANGAEA benchmark and the Prithvi paper. This comparison used the original HLS Burn Scars masks and the original PANGAEA train/validation split, to match the published protocol. We restricted the evaluation to the single-fire subset. We evaluated Tessera and AlphaEarth embeddings on the single-fire subset using logistic regression, RF, and the lightweight U-Net. We reported mean metrics averaged across the burned and unburned classes, matching the benchmark reporting convention. Mean metrics are generally higher because the unburned class is easier to classify and represents the majority of pixels. We compared these results with published PANGAEA baselines and the best-performing geospatial foundation model under the 100% training data setting. Because the published results were evaluated on the full benchmark rather than our single-fire subset, this comparison was intended as contextual rather than a strict head-to-head benchmark.

S8.2 Results

Lightweight downstream models trained on Tessera embeddings reached or exceeded published results on the HLS Burn Scars benchmark (Table S3). A Random Forest on Tessera embeddings

(mIoU = 0.850, m-F1 = 0.915) performed on par with the supervised U-Net baseline, which remains the strongest published PANGAEA result and outperformed all benchmarked geospatial foundation models on this task. Tessera with the lightweight U-Net (mIoU = 0.922, m-F1 = 0.959) exceeded the PANGAEA U-Net baseline, the best-performing PANGAEA GFM (Prithvi), and the fine-tuned Prithvi result from the original benchmark paper.

Table S3: Contextual comparison with published PANGAEA HLS Burn Scars benchmark results. Metrics are mean class scores. Published values are reported from the original benchmarks over the full chip set and are not strictly head-to-head with our single-fire subset evaluation; our own post-fire HLS U-Net, evaluated on both sets, quantifies the offset between them.

Approach	mIoU $\uparrow$	m-F1 $\uparrow$
<i>Annual embedding approach (single-fire subset)</i>		
Tessera + LogReg	0.778	0.866
Tessera + RF	0.850	0.915
Tessera + Light U-Net	0.922	0.959
AlphaEarth + Light U-Net	0.792	0.875
<i>Our post-fire HLS baseline</i>		
Post-fire HLS + U-Net (full benchmark)	0.861	0.920
Post-fire HLS + U-Net (single-fire subset)	0.886	0.937
<i>Published post-fire HLS benchmarks (full benchmark)</i>		
PANGAEA U-Net baseline	0.845	0.911
PANGAEA best-performing GFM (Prithvi)	0.827	0.899
Prithvi (original paper, fine-tuned)	0.848	0.914

This performance was achieved with substantially smaller trainable models and simpler inputs. PANGAEA evaluates frozen GFM encoders through a trainable UPerNet decoder, with 30.9–164.4M trainable parameters for GFM configurations and 14.8M for its U-Net baseline. Our lightweight U-Net trains approximately 0.87M parameters and the Random Forest operates on individual pixels without a spatial decoder.

Note, however, that the comparison is contextual rather than strictly head-to-head. Published PANGAEA results cover the full benchmark, whereas our evaluation was restricted to the single-fire subset to avoid label mismatch between event-specific masks and annual embeddings (Section 3.2.2). To bridge the two, we trained our own post-fire HLS U-Net baseline under both protocols. On the full benchmark it closely reproduced the published PANGAEA U-Net result (m-F1 = 0.920 vs. 0.911), validating our implementation; trained and evaluated on the single-fire subset, the same architecture scored modestly higher (m-F1 = 0.937), indicating the subset is somewhat easier. Despite this, the Tessera margin over published results exceeded this offset.

S9 Effect of explicit multi-year temporal context

Annual embeddings may encode temporal change within a single yearly representation, but disturbance information could also be recovered by explicitly comparing embeddings across years. We therefore tested whether adjacent-year embeddings or explicit embedding differences improved burned area classification relative to the fire-year embedding alone. For Tesseract and AlphaEarth, we evaluated six temporal feature configurations: the fire-year embedding E_0 ; the difference between the fire-year and pre-fire embeddings, $E_0 - E_{-1}$; the concatenated pre-fire and fire-year embeddings, $[E_{-1}, E_0]$; the same pair together with their difference, $[E_{-1}, E_0, E_0 - E_{-1}]$; a three-year stack, $[E_{-1}, E_0, E_{+1}]$; and a pre/post stack excluding the fire year, $[E_{-1}, E_{+1}]$.

All configurations were evaluated using Random Forest classifiers with the same hyperparameters as the main benchmark experiments: 200 trees, $\sqrt{d}$ features considered per split, a minimum leaf size of 5, and a minimum split size of 10. We used the same 793-chip cohort and three-fold spatial cross-validation scheme as the annual fire-mapping experiment, with 528–531 training chips and 262–266 validation chips per fold. Models were trained on balanced samples of 1,000 burned and 1,000 unburned pixels per training chip using the refined MTBS labels. The E_0 results were obtained from the corresponding annual fire-mapping models, while a separate classifier was trained for each additional temporal configuration.

To evaluate all configurations using a common and computationally tractable protocol, we uniformly sampled 10,000 valid pixels from each chip using a fixed random seed. Evaluation samples were not class-balanced and contained approximately 11.4% burned pixels. Within each fold, models were evaluated only on samples from the held-out chips. The same sampled locations were used across temporal configurations, and samples with non-finite embedding values were excluded. F1, IoU, and AUROC were calculated by pooling sampled pixels across the validation chips in each fold and are reported as the mean and standard deviation across the three folds.

S9.1 Results

Explicit temporal context affected Tesseract and AlphaEarth differently (Figure S5; Table S4). For Tesseract, the fire-year embedding alone already contained most of the recoverable burned area signal, achieving an F1 score of 0.840 ± 0.011 . Adding the pre-fire embedding and its explicit difference from the fire year increased F1 only modestly to 0.857 ± 0.009 . The concatenated pre-fire and fire-year embeddings and the three-year stack performed similarly, with F1 scores of 0.849 ± 0.012 and 0.855 ± 0.011 , respectively. Using only the temporal difference did not improve performance (0.835 ± 0.011), while excluding the fire-year embedding reduced F1 substantially to 0.676 ± 0.013 .

AlphaEarth benefited considerably more from explicit temporal context. Adding the pre-fire embedding and the explicit temporal difference increased F1 from 0.583 ± 0.041 for E_0 alone to 0.731 ± 0.022 . The temporal difference alone and the three-year stack also improved performance, reaching F1 scores of 0.676 ± 0.026 and 0.682 ± 0.023 , respectively. When the fire-year embedding was excluded, the pre/post stack performed similarly to E_0 alone (0.599 ± 0.025 versus 0.583 ± 0.041).

IoU followed the same overall pattern. AUROC varied little among Tesseract configurations containing E_0 , ranging from 0.973 to 0.975, whereas AlphaEarth AUROC increased from 0.908 ± 0.007

for E_0 alone to 0.949 ± 0.004 with the full temporal context. For the AlphaEarth configurations for which complete-chip results were available, F1 from the uniform evaluation sample differed by only 0.007–0.015, indicating that the sampling protocol closely approximated complete-chip evaluation.

Together, these results suggest that wildfire disturbance information is concentrated within Tessera’s fire-year representation, so explicitly supplying adjacent annual states provides little additional benefit. AlphaEarth also retains useful disturbance information, but that information is extracted more effectively when temporal contrast is supplied explicitly to the downstream model.

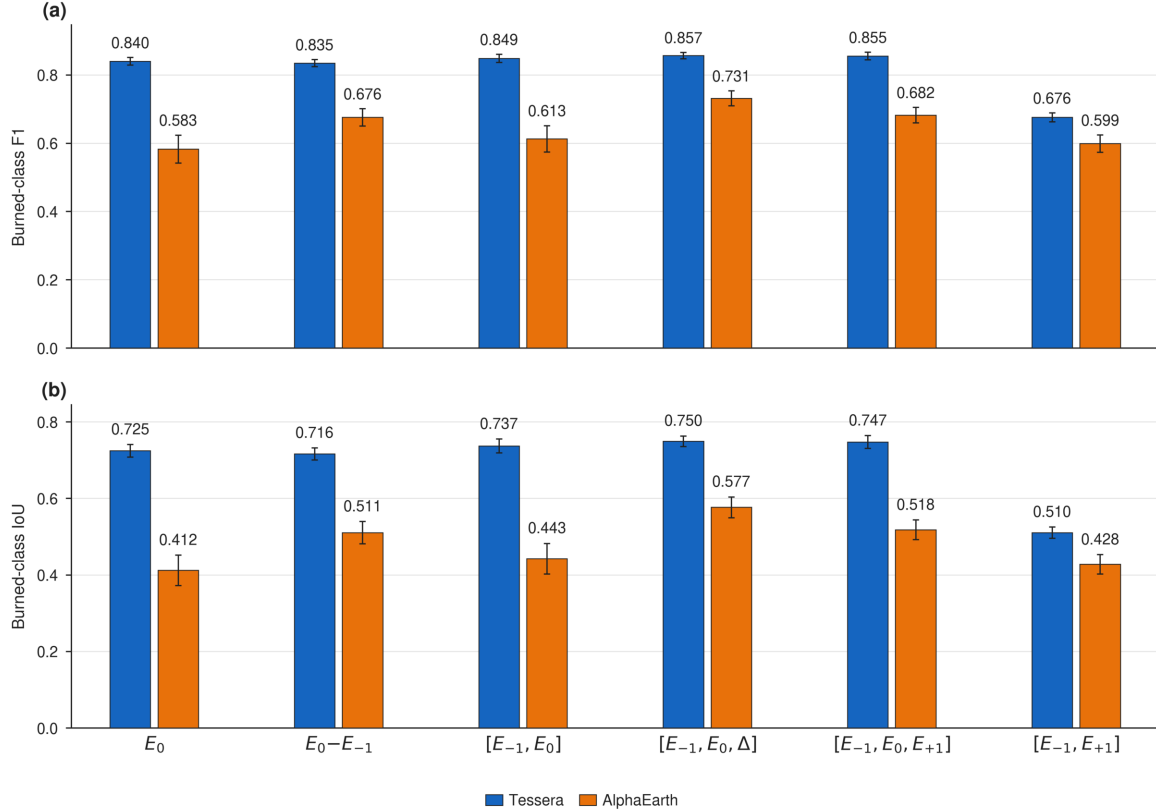


Figure S5: Effect of explicit multi-year temporal context on burned area classification using Tessera and AlphaEarth embeddings. Bars show mean (a) burned-class F1 and (b) burned-class IoU across three spatial cross-validation folds; numbers above the bars give the corresponding means, and error bars indicate one standard deviation. Models were trained on balanced burned and unburned pixel samples and evaluated using 10,000 uniformly sampled valid pixels from each held-out chip. E_{-1} , E_0 , and E_{+1} denote the pre-fire, fire-year, and post-fire annual embeddings, respectively, and $\Delta = E_0 - E_{-1}$.

Table S4: Effect of explicit multi-year temporal context on burned-area classification using Tessera and AlphaEarth embeddings. Random Forest models were evaluated using 10,000 uniformly sampled valid pixels per validation chip under spatially blocked three-fold cross-validation. Values are fold mean $\pm$ standard deviation. E_0 denotes the fire-year embedding, E_{-1} the preceding year, E_{+1} the following year, and $\Delta = E_0 - E_{-1}$. Bold values indicate the highest F1 and IoU for each embedding product.

Features	Tessera F1	Tessera IoU	Tessera AUROC	AlphaEarth F1	AlphaEarth IoU	AlphaEarth AUROC
E_0	0.840 ± 0.011	0.725 ± 0.016	0.973 ± 0.002	0.583 ± 0.041	0.412 ± 0.040	0.908 ± 0.007
$E_0 - E_{-1}$	0.835 ± 0.011	0.716 ± 0.016	0.963 ± 0.002	0.676 ± 0.026	0.511 ± 0.029	0.930 ± 0.004
$[E_{-1}, E_0]$	0.849 ± 0.012	0.737 ± 0.018	0.973 ± 0.002	0.613 ± 0.039	0.443 ± 0.040	0.915 ± 0.006
$[E_{-1}, E_0, \Delta]$	0.857 ± 0.009	0.750 ± 0.014	0.974 ± 0.002	0.731 ± 0.022	0.577 ± 0.027	0.949 ± 0.004
$[E_{-1}, E_0, E_{+1}]$	0.855 ± 0.011	0.747 ± 0.017	0.975 ± 0.002	0.682 ± 0.023	0.518 ± 0.026	0.944 ± 0.002
$[E_{-1}, E_{+1}]$	0.676 ± 0.013	0.510 ± 0.015	0.940 ± 0.003	0.599 ± 0.025	0.428 ± 0.025	0.921 ± 0.001

S10 False-negative rates by burn severity

Table S5: False-negative rates by MTBS burn-severity class for Tessera and AlphaEarth using the Lightweight U-Net. Values are aggregated across all 793 benchmark chips using out-of-fold predictions from the annual fire mapping experiment (Section 4.3). False-negative rates (FNR) are calculated over burned pixels within each severity class; the final column reports the AlphaEarth–Tessera difference in percentage points.

Severity	n burned	Tessera FNR	AlphaEarth FNR	Gap (AE – Tessera)
Low	16.8 M	10.8%	29.0%	+18.2 pp
Moderate	4.9 M	1.3%	6.3%	+5.1 pp
High	1.6 M	0.1%	0.8%	+0.6 pp

Table S6: False-negative rates by MTBS burn-severity class for Tessera and AlphaEarth using logistic regression. Values are aggregated across all 793 benchmark chips using out-of-fold predictions from the annual fire mapping experiment (Section 4.3). False-negative rates (FNR) are calculated over burned pixels within each severity class; the final column reports the AlphaEarth–Tessera difference in percentage points.

Severity	Tessera FNR	AlphaEarth FNR	Gap (AE – Tessera)
Low	12.2%	28.3%	+16.1 pp
Moderate	3.8%	9.5%	+5.7 pp
High	2.1%	3.7%	+1.6 pp

S11 Overview of supplementary-only comparisons and ablations

Table S7: Overview of supplementary-only comparisons and ablations. Complete protocols are provided in the linked sections.

Analysis	Cohort and evaluation
Published-transfer comparison (Section S7)	Same US-trained Tesseract model evaluated without retraining on 17 EMSR fires from the published AlphaEarth comparison; 15 belong to the main cohort and two are additional 2022 fires
PANGAEA comparison (Section S8)	Single-fire subset: 588 chips; official 394/194 split; original HLS Burn Scars masks; full-chip, mean-class scoring
Multi-year context ablation (Section S9)	793 chips; six temporal configurations; same three-fold spatial cross-validation as annual fire mapping; RF trained on balanced samples and evaluated using 10,000 uniformly sampled valid pixels per validation chip

References

- Andela, N., Morton, D.C., Giglio, L., Chen, Y., van der Werf, G.R., Kasibhatla, P.S., DeFries, R.S., Collatz, G.J., Hantson, S., Kloster, S., Bachelet, D., Forrest, M., Lasslop, G., Li, F., Mangeon, S., Melton, J.R., Yue, C., Randerson, J.T., 2017. A human-driven decline in global burned area. *Science* 356, 1356–1362. doi:10.1126/science.aal4108.
- Ball, J.G.C., Wicklein, J.A., Feng, Z., Knezevic, J., Jaffer, S., Madhavapeddy, A., Atzberger, C., Dalponte, M., Coomes, D.A., 2026. Geospatial foundation models enable data-efficient tree species mapping in temperate mountain forests. *Science of Remote Sensing* 14, 100466. doi:10.1016/j.srs.2026.100466.
- Boschetti, L., Roy, D.P., Giglio, L., Huang, H., Zubkova, M., Humber, M.L., 2019. Global validation of the collection 6 MODIS burned area product. *Remote Sensing of Environment* 235, 111490. doi:10.1016/j.rse.2019.111490.
- Brown, C.F., Kazmierski, M.R., Pasquarella, V.J., Rucklidge, W.J., Samsikova, M., Zhang, C., Shelhamer, E., Lahera, E., Wiles, O., Ilyushchenko, S., Gorelick, N., Zhang, L.L., Alj, S., Schechter, E., Askay, S., Guinan, O., Moore, R., Boukouvalas, A., Kohli, P., 2025. AlphaEarth Foundations: An embedding field model for accurate and efficient global mapping from sparse label data. doi:10.48550/arXiv.2507.22291, arXiv:2507.22291.
- Brown, J.F., Tollerud, H.J., Barber, C.P., Zhou, Q., Dwyer, J.L., Vogelmann, J.E., Loveland, T.R., Woodcock, C.E., Stehman, S.V., Zhu, Z., Pengra, B.W., Smith, K., Horton, J.A., Xian, G., Auch, R.F., Sohl, T.L., Sayler, K.L., Gallant, A.L., Zelenak, D., Reker, R.R., Rover, J., 2020. Lessons

- learned implementing an operational continuous United States national land change monitoring capability: The Land Change Monitoring, Assessment, and Projection (LCMAP) approach. *Remote Sensing of Environment* 238, 111356. doi:10.1016/j.rse.2019.111356.
- Chen, B., Wu, S., Jin, Y., Song, Y., Wu, C., Venevsky, S., Xu, B., Webster, C., Gong, P., 2024. Wildfire risk for global wildland–urban interface areas. *Nature Sustainability* 7, 474–484. doi:10.1038/s41893-024-01291-0.
- Chuvieco, E., Lizundia-Loiola, J., Pettinari, M.L., Ramo, R., Padilla, M., Tansey, K., Mouillot, F., Laurent, P., Storm, T., Heil, A., Plummer, S., 2018. Generation and analysis of a new global burned area product based on MODIS 250 reflectance bands and thermal anomalies. *Earth System Science Data* 10, 2015–2031. doi:10.5194/essd-10-2015-2018.
- Coop, J.D., DeLory, T.J., Downing, W.M., Haire, S.L., Krawchuk, M.A., Miller, C., Parisien, M.A., Walker, R.B., 2019. Contributions of fire refugia to resilient ponderosa pine and dry mixed-conifer forest landscapes. *Ecosphere* 10, e02809. doi:10.1002/ecs2.2809.
- Copernicus Emergency Management Service, . Copernicus Emergency Management Service On-Demand Mapping.
- Deshpande, M.V., Pillai, D., Jain, M., 2022. Detecting and quantifying residue burning in small-holder systems: An integrated approach using Sentinel-2 data. *International Journal of Applied Earth Observation and Geoinformation* 108, 102761. doi:10.1016/j.jag.2022.102761.
- Dinerstein, E., Olson, D., Joshi, A., Vynne, C., Burgess, N.D., Wikramanayake, E., Hahn, N., Palminteri, S., Hedao, P., Noss, R., Hansen, M., Locke, H., Ellis, E.C., Jones, B., Barber, C.V., Hayes, R., Kormos, C., Martin, V., Crist, E., Sechrest, W., Price, L., Baillie, J.E.M., Weeden, D., Suckling, K., Davis, C., Sizer, N., Moore, R., Thau, D., Birch, T., Potapov, P., Turubanova, S., Tyukavina, A., de Souza, N., Pintea, L., Brito, J.C., Llewellyn, O.A., Miller, A.G., Patzelt, A., Ghazanfar, S.A., Timberlake, J., Klöser, H., Shennan-Farpón, Y., Kindt, R., Lillesø, J.P.B., van Breugel, P., Graudal, L., Voge, M., Al-Shammari, K.F., Saleem, M., 2017. An Ecoregion-Based Approach to Protecting Half the Terrestrial Realm. *BioScience* 67, 534–545. doi:10.1093/biosci/bix014.
- Earth Science Data Systems, NASA., 2025. Global Fire Emissions Database, Version 4.1 (GFEDv4) | NASA Earthdata.
- Eidenshink, J., Schwind, B., Brewer, K., Zhu, Z.L., Quayle, B., Howard, S., 2007. A Project for Monitoring Trends in Burn Severity. *Fire Ecology* 3, 3–21. doi:10.4996/fireecology.0301003.
- Feng, Z., Atzberger, C., Jaffer, S., Knezevic, J., Sormunen, S., Young, R., Lisaius, M.C., Immitzer, M., Jackson, T., Ball, J., Coomes, D.A., Madhavapeddy, A., Blake, A., Keshav, S., 2026a. TESSERA: Temporal Embeddings of Surface Spectra for Earth Representation and Analysis. doi:10.48550/arXiv.2506.20380, arXiv:2506.20380.

- Feng, Z., Jaffer, S., Shokar, I., Knezevic, J., Elvers, M., Atzberger, C., Young, R., Naik, A., Robinson, N., Blake, A., Coomes, D., Madhavapeddy, A., Keshav, S., 2026b. TESSERA v2: Scaling Pixel-wise Earth Foundation Models. <https://arxiv.org/abs/2607.03949v1>.
- Fornacca, D., Ye, Y., Li, X., Xiao, W., 2025. Including Small Fires in Global Historical Burned Area Products: Promising Results from a Landsat-Based Product. *Fire* 8. doi:10.3390/fire8110422.
- Fu, Y., Fang, W., Sheng, V.S., 2024. Burned Area Segmentation in Optical Remote Sensing Images Driven by U-Shaped Multistage Masked Autoencoder. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing* 17, 10770–10780. doi:10.1109/JSTARS.2024.3402122.
- Gaveau, D.L.A., Descals, A., Salim, M.A., Sheil, D., Sloan, S., 2021. Refined burned-area mapping protocol using Sentinel-2 data increases estimate of 2019 Indonesian burning. *Earth System Science Data* 13, 5353–5368. doi:10.5194/essd-13-5353-2021.
- Giglio, L., Boschetti, L., Roy, D.P., Hall, J.V., Zubkova, M., Humber, M., Huang, H., Oles, V., 2025. The NASA VIIRS burned area product, global validation, and intercomparison with the NASA MODIS burned area product. *Remote Sensing of Environment* 331, 115006. doi:10.1016/j.rse.2025.115006.
- Giglio, L., Boschetti, L., Roy, D.P., Humber, M.L., Justice, C.O., 2018. The Collection 6 MODIS burned area mapping algorithm and product. *Remote Sensing of Environment* 217, 72–85. doi:10.1016/j.rse.2018.08.005.
- Giglio, L., Justice, C., Boschetti, L., Roy, D., 2021. Modis/terra+aqua burned area monthly l3 global 500m sin grid v061. URL: <https://www.earthdata.nasa.gov/data/catalog/lpcloud-mcd64a1-061>, doi:10.5067/MODIS/MCD64A1.061.
- Hall, J.V., Loboda, T.V., Giglio, L., McCarty, G.W., 2016. A MODIS-based burned area assessment for Russian croplands: Mapping requirements and challenges. *Remote Sensing of Environment* 184, 506–521. doi:10.1016/j.rse.2016.07.022.
- Hu, X., Ban, Y., Nascetti, A., 2021. Uni-Temporal Multispectral Imagery for Burned Area Mapping with Deep Learning. *Remote Sensing* 13. doi:10.3390/rs13081509.
- Hu, X., Zhang, P., Ban, Y., 2023. Large-scale burn severity mapping in multispectral imagery using deep semantic segmentation models. *ISPRS Journal of Photogrammetry and Remote Sensing* 196, 228–240. doi:10.1016/j.isprsjprs.2022.12.026.
- Humber, M.L., Boschetti, L., Giglio, L., 2020. Assessing the Shape Accuracy of Coarse Resolution Burned Area Identifications. *IEEE Transactions on Geoscience and Remote Sensing* 58, 1516–1526. doi:10.1109/TGRS.2019.2943901.
- Jakubik, J., Roy, S., Phillips, C.E., Fraccaro, P., Godwin, D., Zadrozny, B., Szwarcman, D., Gomes, C., Nyirjesy, G., Edwards, B., Kimura, D., Simumba, N., Chu, L., Mukkavilli, S.K., Lambhate, D., Das, K., Bangalore, R., Oliveira, D., Muszynski, M., Ankur, K., Ramasubramanian, M., Gurung,

- I., Khallaghi, S., Hanxi, Li, Cecil, M., Ahmadi, M., Kordi, F., Alemohammad, H., Maskey, M., Ganti, R., Weldemariam, K., Ramachandran, R., 2023. Foundation Models for Generalist Geospatial Artificial Intelligence. doi:10.48550/arXiv.2310.18660, arXiv:2310.18660.
- Ju, J., Zhou, Q., Freitag, B., Roy, D.P., Zhang, H.K., Sridhar, M., Mandel, J., Arab, S., Schmidt, G., Crawford, C.J., Gascon, F., Strobl, P.A., Masek, J.G., Neigh, C.S.R., 2025. The Harmonized Landsat and Sentinel-2 version 2.0 surface reflectance dataset. *Remote Sensing of Environment* 324, 114723. doi:10.1016/j.rse.2025.114723.
- Klemmer, K., Rolf, E., Russwurm, M., Camps-Valls, G., Czerkawski, M., Ermon, S., Francis, A., Jacobs, N., Kerner, H.R., Mackey, L., Mai, G., Aodha, O.M., Reichstein, M., Robinson, C., Rolnick, D., Shelhamer, E., Sitzmann, V., Tuia, D., Zhu, X., 2025. Earth Embeddings: Towards AI-centric Representations of our Planet .
- Knopp, L., Wieland, M., Rättich, M., Martinis, S., 2020. A Deep Learning Approach for Burned Area Segmentation with Sentinel-2 Data. *Remote Sensing* 12. doi:10.3390/rs12152422.
- Laris, P.S., 2005. Spatiotemporal problems with detecting and mapping mosaic fire regimes with coarse-resolution satellite data in savanna environments. *Remote Sensing of Environment* 99, 412–424. doi:10.1016/j.rse.2005.09.012.
- Lisaius, M.C., Blake, A., Keshav, S., Atzberger, C., 2024. Using Barlow Twins to Create Representations From Cloud-Corrupted Remote Sensing Time Series. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing* 17, 13162–13168. doi:10.1109/JSTARS.2024.3426044.
- Liu, J., Heiskanen, J., Maeda, E.E., Pellikka, P.K.E., 2018. Burned area detection based on Landsat time series in savannas of southern Burkina Faso. *International Journal of Applied Earth Observation and Geoinformation* 64, 210–220. doi:10.1016/j.jag.2017.09.011.
- Liu, J., Wang, X., Zeng, Z., Feng, J., Qin, Q., Ilyankou, I., Dong, G., Cheng, T., 2026a. CITYREP: A Unified Benchmark for Urban Representations Across Cities, Tasks, and Modalities. doi:10.48550/arXiv.2605.26036, arXiv:2605.26036.
- Liu, P., Liu, Y., Guo, X., Liu, Y., Zhao, W., Xu, W., 2026b. Faster, better, and more accurate mapping of burned areas using Sentinel-2 multispectral images. *Remote Sensing of Environment* 333, 115137. doi:10.1016/j.rse.2025.115137.
- Long, T., Zhang, Z., He, G., 2021. 30 m Resolution Global Annual Burned Area Product. doi:10.7910/DVN/3CTMKP.
- Long, T., Zhang, Z., He, G., Jiao, W., Tang, C., Wu, B., Zhang, X., Wang, G., Yin, R., 2019. 30 m Resolution Global Annual Burned Area Mapping Based on Landsat Images and Google Earth Engine. *Remote Sensing* 11. doi:10.3390/rs11050489.

- Ma, Y., Shen, Y., Swatantran, A., Lobell, D.B., 2026. Harvesting AlphaEarth: Benchmarking the geospatial foundation model for agricultural downstream tasks. *International Journal of Applied Earth Observation and Geoinformation* 149, 105258. doi:10.1016/j.jag.2026.105258.
- Marsocci, V., Jia, Y., Bellier, G.L., Kerekes, D., Zeng, L., Hafner, S., Gerard, S., Brune, E., Yadav, R., Shibli, A., Fang, H., Ban, Y., Vergauwen, M., Audebert, N., Nascetti, A., 2024. PANGAEA: A Global and Inclusive Benchmark for Geospatial Foundation Models. doi:10.48550/arXiv.2412.04204, arXiv:2412.04204.
- Mouillot, F., Schultz, M.G., Yue, C., Cadule, P., Tansey, K., Ciais, P., Chuvieco, E., 2014. Ten years of global burned area products from spaceborne remote sensing—A review: Analysis of user needs and recommendations for future developments. *International Journal of Applied Earth Observation and Geoinformation* 26, 64–79. doi:10.1016/j.jag.2013.05.014.
- Neigh, C., Ju, J., Roger, J.C., Skakun, S., Vermote, E., Claverie, M., Dungan, J., Yin, Z., Freitag, B., Justice, C., 2021. Hls sentinel-2 multi-spectral instrument surface reflectance daily global 30m v2.0. URL: <https://www.earthdata.nasa.gov/data/catalog/lpcloud-hlss30-2.0>, doi:10.5067/HLS/HLSS30.002.
- Nolè, A., Rita, A., Spatola, M.F., Borghetti, M., 2022. Biogeographic variability in wildfire severity and post-fire vegetation recovery across the European forests via remote sensing-derived spectral metrics. *Science of The Total Environment* 823, 153807. doi:10.1016/j.scitotenv.2022.153807.
- Padilla, M., Stehman, S.V., Chuvieco, E., 2014. Validation of the 2008 MODIS-MCD45 global burned area product using stratified random sampling. *Remote Sensing of Environment* 144, 187–196. doi:10.1016/j.rse.2014.01.008.
- Phillips, C., Roy, S., Ankur, K., Ramachandran, R., 2023. HLS Foundation Burnscars Dataset. doi:10.57967/hf/0956.
- van der Plas, T.L., Bakermans, J.J., Nedungadi, V., Tijūnaitytė, G., Rußwurm, M., Athanasiadis, I.N., 2026. Better Together: Evaluating the Complementarity of Earth Embedding Models. doi:10.48550/arXiv.2605.18667, arXiv:2605.18667.
- Qi, B., Zhang, Z., Long, T., He, G., Wang, G., Peng, Y., Xu, Z., 2024. High Resolution (30 m) Burned Area Product Improves the Ability for Carbon Emission Estimation in Africa. *Earth's Future* 12, e2024EF005051. doi:10.1029/2024EF005051.
- Radeloff, V.C., Roy, D.P., Wulder, M.A., Anderson, M., Cook, B., Crawford, C.J., Friedl, M., Gao, F., Gorelick, N., Hansen, M., Healey, S., Hostert, P., Hulley, G., Huntington, J.L., Johnson, D.M., Neigh, C., Lyapustin, A., Lymburner, L., Pahlevan, N., Pekel, J.F., Scambos, T.A., Schaaf, C., Strobl, P., Woodcock, C.E., Zhang, H.K., Zhu, Z., 2024. Need and vision for global medium-resolution Landsat and Sentinel-2 data products. *Remote Sensing of Environment* 300, 113918. doi:10.1016/j.rse.2023.113918.

- Ramo, R., Roteta, E., Bistinas, I., van Wees, D., Bastarrika, A., Chuvieco, E., van der Werf, G.R., 2021. African burned area and fire carbon emissions are strongly impacted by small fires undetected by coarse resolution satellite data. *Proceedings of the National Academy of Sciences of the United States of America* 118, e2011160118. doi:10.1073/pnas.2011160118.
- Ribeiro, T.F.R., Silva, F., Moreira, J., Costa, R.L.d.C., 2023. Burned area semantic segmentation: A novel dataset and evaluation using convolutional networks. *ISPRS Journal of Photogrammetry and Remote Sensing* 202, 565–580. doi:10.1016/j.isprsjprs.2023.07.002.
- Rodrigues, J.A., Libonati, R., Pereira, A.A., Nogueira, J.M.P., Santos, F.L.M., Peres, L.F., Santa Rosa, A., Schroeder, W., Pereira, J.M.C., Giglio, L., Trigo, I.F., Setzer, A.W., 2019. How well do global burned area products represent fire patterns in the Brazilian Savannas biome? An accuracy assessment of the MCD64 collections. *International Journal of Applied Earth Observation and Geoinformation* 78, 318–331. doi:10.1016/j.jag.2019.02.010.
- Ronneberger, O., Fischer, P., Brox, T., 2015. U-Net: Convolutional Networks for Biomedical Image Segmentation. doi:10.48550/arXiv.1505.04597, arXiv:1505.04597.
- Roteta, E., Bastarrika, A., Padilla, M., Storm, T., Chuvieco, E., 2019. Development of a Sentinel-2 burned area algorithm: Generation of a small fire database for sub-Saharan Africa. *Remote Sensing of Environment* 222, 1–17. doi:10.1016/j.rse.2018.12.011.
- Roy, D.P., Huang, H., Boschetti, L., Giglio, L., Yan, L., Zhang, H.H., Li, Z., 2019. Landsat-8 and Sentinel-2 burned area mapping - A combined sensor multi-temporal change detection approach. *Remote Sensing of Environment* 231, 111254. doi:10.1016/j.rse.2019.111254.
- Sdraka, M., Dimakos, A., Malounis, A., Ntasiou, Z., Karantzas, K., Michail, D., Papoutsis, I., 2024. FLOGA: A Machine-Learning-Ready Dataset, a Benchmark, and a Novel Deep Learning Model for Burnt Area Mapping With Sentinel-2. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing* 17, 7801–7824. doi:10.1109/JSTARS.2024.3381737.
- Seydi, S.T., 2025. Deep Learning-Based Burned Area Mapping Using Bi-Temporal Siamese Networks and AlphaEarth Foundation Datasets. doi:10.48550/arXiv.2509.07852, arXiv:2509.07852.
- Seydi, S.T., Hasanlou, M., Chanussot, J., 2022. *Burnt-Net*: Wildfire burned area mapping with single post-fire Sentinel-2 data and deep learning morphological neural network. *Ecological Indicators* 140, 108999. doi:10.1016/j.ecolind.2022.108999.
- Shah, S.U., Yebra, M., Dijk, A.I.J.M.V., Cary, G.J., 2022. A New Fire Danger Index Developed by Random Forest Analysis of Remote Sensing Derived Fire Sizes. *Fire* 5. doi:10.3390/fire5050152.
- Shi, H., Rigge, M., Homer, C.G., Xian, G., Meyer, D.K., Bunde, B., 2018. Historical Cover Trends in a Sagebrush Steppe Ecosystem from 1985 to 2013: Links with Climate, Disturbance, and Management. *Ecosystems* 21, 913–929. doi:10.1007/s10021-017-0191-3.

- Silva, L., Gonçalves, J., 2026. Evaluating AlphaEarth and TESSERA Geospatial Embeddings for Machine Learning-Based Burned Area Mapping in Portugal. doi:10.21203/rs.3.rs-10285823/v1.
- Stroppiana, D., Sali, M., Brivio, P.A., Sona, G., Franquesa, M., Pettinari, M.L., Chuvieco, E., 2025. Spatial Agreement of Burned Area Products Derived from Very High to Coarse-Resolution Satellite Imagery in African Biomes. *Fire* 8. doi:10.3390/fire8040126.
- Sui, T., Huang, Q., Wu, M., Wu, M., Zhang, Z., 2024. BiAU-Net: Wildfire burnt area mapping using bi-temporal Sentinel-2 imagery and U-Net with attention mechanism. *International Journal of Applied Earth Observation and Geoinformation* 132, 104034. doi:10.1016/j.jag.2024.104034.
- USDA Forest Service, U.S. Geological Survey, . Monitoring Trends in Burn Severity Thematic Burn Severity.
- van der Werf, G.R., Randerson, J.T., Giglio, L., van Leeuwen, T.T., Chen, Y., Rogers, B.M., Mu, M., van Marle, M.J.E., Morton, D.C., Collatz, G.J., Yokelson, R.J., Kasibhatla, P.S., 2017. Global fire emissions estimates during 1997–2016. *Earth System Science Data* 9, 697–720. doi:10.5194/essd-9-697-2017.
- Verde, J.C., Zêzere, J.L., 2010. Assessment and validation of wildfire susceptibility and hazard in Portugal. *Natural Hazards and Earth System Sciences* 10, 485–497. doi:10.5194/nhess-10-485-2010.
- Verhegghen, A., Eva, H., Ceccherini, G., Achard, F., Gond, V., Gourlet-Fleury, S., Cerutti, P.O., 2016. The Potential of Sentinel Satellites for Burnt Area Mapping and Monitoring in the Congo Basin Forests. *Remote Sensing* 8, 986. doi:10.3390/rs8120986.
- Viana-Soto, A., Senf, C., 2025. The European Forest Disturbance Atlas: A forest disturbance monitoring system using the Landsat archive. *Earth System Science Data* 17, 2373–2404. doi:10.5194/essd-17-2373-2025.
- Williams, R.J., Gill, A.M., Bradstock, R.A., 2012. *Flammable Australia: Fire Regimes, Biodiversity and Ecosystems in a Changing World*. Csiro Publishing.
- Zhu, Z., Woodcock, C.E., 2014. Continuous change detection and classification of land cover using all available Landsat data. *Remote Sensing of Environment* 144, 152–171. doi:10.1016/j.rse.2014.01.011.
- Zoran, D., Parthasarathy, N., Yang, Y., Hudson, D.A., Carreira, J., Zisserman, A., 2026. Recurrent Video Masked Autoencoders. doi:10.48550/arXiv.2512.13684, arXiv:2512.13684.