

FuDU: A Fuzzy Dual-dimensional Uncertainty Framework for Streaming Active Learning in Industrial Defect Detection

Zhaoyang Wang¹, Haiyong Chen¹, Binyi Su¹, and Xinwei Lyu¹

1. School of Artificial Intelligence, Hebei University of Technology, Tianjin, China
haiyong.chen@hebut.edu.cn

Abstract. Ensuring the reliability of deep learning models in real-time industrial defect detection is critical for high-stakes quality inspection. To mine uncertain samples within continuous industrial media streams, thereby enhancing the reliability of the detection system, this paper proposes a streaming active learning method based on the Fuzzy Dual-dimensional Uncertainty (FuDU) framework. Specifically, we first design a Prototype-based Global Uncertainty Quantification (PGUQ) module on the backbone to evaluate image-level uncertainty via normal/defective feature prototypes. A Dual-entropy defect Uncertainty Evaluator (DeUE) is then integrated into the detection head to quantify box-level uncertainty. Finally, by modeling uncertainty as systematic error, we propose a fuzzy dual-dimensional uncertainty-aware strategy that leverages fuzzy inference to fuse dual-dimensional uncertainties, enabling expert knowledge-driven adaptive sampling decisions. Comprehensive experiments demonstrate that FuDU is efficient and flexible, making it well-suited for challenging industrial inspection tasks such as the detection of nuclear fuel rod defects. Our code is publicly available at: <https://github.com/wangzhaoyang-508/FuDU>.

Keywords: Industrial defect detection · Streaming active learning · Uncertainty quantification

1 Introduction

While deep learning-based visual models enable efficient defect detection, their efficacy hinges on the availability of large-scale and well-annotated datasets [8, 44]. In many industrial scenarios, defect samples are inherently scarce and typically collected in static laboratory settings. This exposes the deployed models to two critical risks: The first is the **adversarial risk** stemming from samples near the decision boundary, as shown in Fig. 1 (a). Specifically, features are close to the decision boundary, making it difficult to determine whether a sample is defective or to precisely what category of defects it belongs to. The second involves the **outlier risk** arising from samples outside the training distribution, as illustrated in Fig. 1 (b); here, novel defects or domain shifts cause image features to become outliers that deviate from the original distribution [6, 48]. To

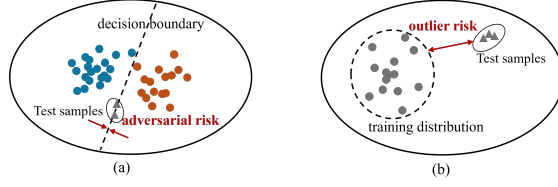


Fig. 1: Illustration of adversarial and outlier risks.

mitigate these risks, researchers have explored various learning paradigms, including few-shot learning [28], incremental learning [32], anomaly detection [4], domain adaptation [3], and language-guided foundation models for open-set detection and zero-/few-shot anomaly recognition [40, 41]. However, a more direct approach involves actively selecting high-risk uncertain samples during inference for expert annotation. This process iteratively optimizes the decision boundary and enhances the model’s domain generalization capability—a paradigm known as Active Learning (AL) [15, 34].

The key to AL lies in uncertainty quantification and sampling strategies. In the context of industrial defect detection, while the most straightforward approach involves selecting images containing low-confidence defects as uncertain samples, false negatives compromise the value of model iteration. Fig. 2 (a) shows the prediction results of the RT-DETR detector [53] on 500 nuclear fuel rod inspection images, where the y-axis represents confidence scores and the pink region indicates the confidence-based sampling range. As can be seen, although confidence-threshold AL can collect numerous false-positive samples (yellow), it fails to identify false negatives (red). Furthermore, existing pool-based AL methods, despite their effectiveness, fail to satisfy real-time constraints [2].

To overcome these limitations and enable reliable AL within nuclear fuel rod defect detection, we propose a Fuzzy dual-dimensional uncertainty (FuDU) framework. As shown in Fig. 3, FuDU incorporates a Prototype-based Global Uncertainty Quantification (PGUQ) module into the detector’s backbone. This module assesses global uncertainty U_g as outlier risk by leveraging dynamic feature prototypes of normal and defect samples (i.e., samples exhibiting large distances from both prototypes are identified as outliers). Additionally, the detection head integrates a Dual-entropy Uncertainty Evaluator (DeUE) that computes defect uncertainty U_d as adversarial risk using box localization and classification entropy (i.e., higher entropy values correspond to elevated adversarial risk). As shown in Fig. 2 (b), U_g and U_d better characterize the model’s uncertainty, facilitating the identification of FN and FP samples. Finally, we introduce a fuzzy dual-dimensional uncertainty evaluation strategy that maps U_g and U_d to linguistic variables and employs fuzzy inference to determine the sampling decision, as shown in Fig. 2 (c).

Extensive experiments verify FuDU’s effectiveness and scenario adaptability. In our nuclear fuel rod defect dataset, the recall reaches 99.3% when combined with uncertainty-based sampling. Compared to manual screening, FuDU

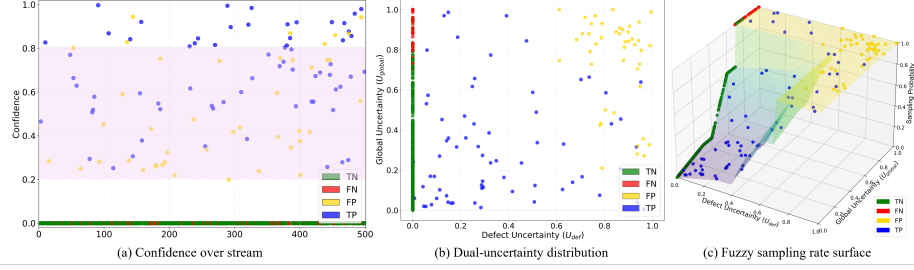


Fig. 2: Comparison of different uncertainty perspectives and sampling strategies on 500 fuel rod images. (a) Image distribution and sampling strategy based on confidence; (b) The image distribution in the dual-uncertainty space; (c) Sampling probability surface based on our FuDU strategy.

reduces the annotation cost to less than one-sixth. Furthermore, it outperforms the confidence-based baseline method by 7.3% in mAP. Its cross-scenario generalization is further validated on the public ELES dataset [52]. Notably, the linguistic variables in FuDU allow quality inspection experts to interpret, validate, and calibrate the sampling strategy, effectively integrating domain expertise into the model. Our key contributions are summarized as follows:

- To improve the reliability of industrial visual inspection systems, we propose FuDU—a fuzzy dual-dimensional uncertainty-driven streaming active learning framework that integrates domain expertise to jointly evaluate defect and global uncertainty for efficient sampling and model updating. To our knowledge, FuDU is the first work to incorporate fuzzy control theory into streaming active learning for industrial defect detection.
- We design two complementary uncertainty quantification modules: PGUQ and DeUE. PGUQ leverages feature prototypes to identify potential FNs and domain shifts, while DeUE captures borderline or novel defects by quantifying box-level uncertainty via dual entropy and confidence.
- Extensive experiments demonstrate that FuDU outperforms state-of-the-art AL methods, ensuring the detector’s reliability and iterative efficiency, making it well-suited for high-stakes industrial visual inspection scenarios.

2 Related Work

2.1 Industrial Defect Detection

In general, deploying general-purpose object detection models for industrial defect detection faces challenges such as severe class imbalance and limited operational scenarios, which compromise model reliability. Although some works have proposed methods such as few-shot learning [30, 35, 39], domain adaptation [19, 36, 51], incremental learning [10, 37], or the use of pre-trained models [26, 38], it remains challenging to simultaneously address the two risks illustrated in Fig. 1. For high-risk scenarios involving large streams of unlabeled

data, employing AL to iteratively enhance model reliability from a data-centric perspective is a more practical approach. Although one-class anomaly detection (AD) [1, 29] quantifies anomalies via normal prototypes and feature distances, its lack of defect categorization and threshold sensitivity limit applicability. Nonetheless, this paradigm inspires our PGUQ for outlier risk assessment.

2.2 Active Learning for Object Detection

Active Learning (AL) aims to achieve maximal model performance with minimal annotation cost by iteratively selecting the most informative samples for labeling [15]. In object detection, existing AL methods mainly rely on uncertainty- and diversity-based sampling, using techniques such as MC dropout [5, 7, 9], query-by-committee [33, 50], evidential learning [23], pseudo-loss estimation and instance-level constraints [43], feature clustering [42, 47], and coreset selection [14, 24]. However, most of these methods are tailored to pool-based settings, requiring offline processing of unlabeled samples. In contrast, industrial inspection requires AL under streaming data, real-time constraints, and severe class imbalance, making pool-based methods difficult to deploy directly [2].

2.3 Fuzzy Control and Uncertainty-Aware Decision Making

Fuzzy control theory [45] enables reasoning under uncertainty via linguistic variables and IF-THEN rules. Variants like Mamdani [20] and Takagi-Sugeno [31] are widely adopted for their interpretability and robustness [25]. In active learning, fuzzy logic facilitates the fusion of heterogeneous uncertainty metrics, enabling dynamic threshold adjustment in streaming scenarios [18]. Crucially, fuzzy systems naturally integrate expert knowledge [11], which is essential for safety-critical inspection where black-box decisions are unacceptable [27]. In industrial visual inspection, fuzzy rules enhance noise tolerance and trustworthiness compared to hard-threshold methods [13]. Motivated by these advantages, we design a domain-expert-calibrated fuzzy inference module to jointly reason over global and local uncertainties for robust streaming AL.

3 Methodology

3.1 Overview

As shown in Fig. 3, the FuDU framework comprises a backbone, a transformer encoder-decoder, and a detection head. During detection, for each image in the data stream, FuDU yields not only inference results but also an image-level uncertainty score U_g based on PGUQ and a defect-level uncertainty score U_d based on DeUE. FuDU determines the sampling probability for the current image based on a pre-defined fuzzy inference system and the fusion of U_g and U_d . After each detection batch, the collected uncertain images are annotated and utilized to train and update both the detector and the prototype library.

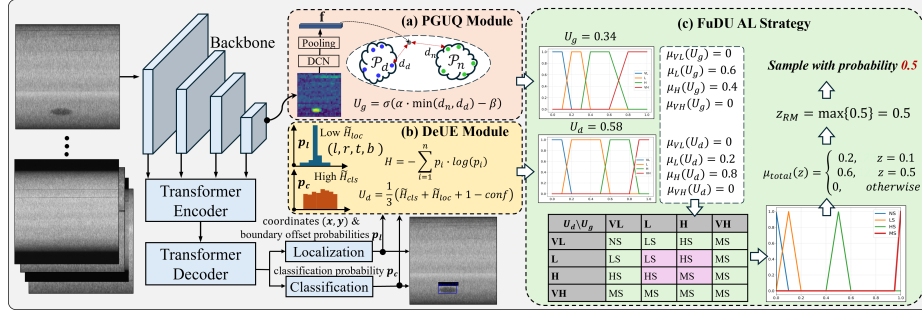


Fig. 3: Overview of the proposed FuDU framework.

3.2 Prototype-based Global Uncertainty Quantification

Variations in the production line induce domain shift, manifested as changes in the distribution of image features, leading to increased global uncertainty of the model. To actively perceive and quantify this, we propose a Prototype-based Uncertainty Quantification module (PGUQ). As illustrated in Fig. 3 (a), PGUQ extracts a feature prototype $\mathbf{f}$ from the feature maps via deformable convolution and global average pooling. The core hypothesis of PGUQ relies on density-based uncertainty estimation: samples located far from high-density regions (represented by prototypes) are considered to have higher uncertainty. We compare $\mathbf{f}$ against normal/defective prototypes to obtain the global uncertainty U_g , calculated as follows:

$$U_g = \sigma(\alpha \cdot d_{\min} - \beta), \quad d_{\min} = \min(d_n, d_d) \quad (1)$$

where the distances to the nearest normal and defective prototypes are defined as:

$$d_n = \min_{\mathbf{p} \in \mathcal{P}_n} \|\mathbf{f} - \mathbf{p}\|_2, \quad d_d = \min_{\mathbf{p} \in \mathcal{P}_d} \|\mathbf{f} - \mathbf{p}\|_2 \quad (2)$$

Here, $\mathbf{f}$ denotes the feature prototype of the current image, while $\mathcal{P}_n$ and $\mathcal{P}_d$ represent the sets of normal and defect prototypes, respectively. $d_{\min}$ measures the proximity of the current sample to the closest known pattern. We employ learnable parameters α and β along with a sigmoid function $\sigma(\cdot)$ to normalize U_g to $[0, 1]$. A value closer to 1 indicates the sample lies in a low-density region, implying greater model uncertainty.

The prototype sets $\mathcal{P}_n$ and $\mathcal{P}_d$ are initialized by applying K-means clustering to features extracted from the initial training set. This provides a prior distribution of the feature manifold. Crucially, to handle domain shift during AL, we treat prototypes as learnable parameters optimized end-to-end via backpropagation. Specifically, gradients flowing through the distance metrics during training enable prototypes to shift towards the current feature distribution, while newly labeled samples in each AL cycle provide fresh supervision that continuously adjusts prototypes to encompass new domain variations, effectively mitigating the

distribution gap between source and target domains. To further ensure the distinctiveness and diversity of the learned prototypes, we introduce two auxiliary losses during the iterative optimization.

Prototype contrastive loss To facilitate feature-prototype alignment and discrimination between normal and defective samples, we optimize the spatial relationship between $\mathbf{f}$ and the prototype. Formally, let $y \in \{0, 1\}$ denote the label (0 for normal, 1 for defect). The contrastive loss $\mathcal{L}_{cont}$ is defined as:

$$\mathcal{L}_{cont} = \begin{cases} \|\mathbf{f} - \mathbf{p}_n^*\|_2 + \max(0, m - \|\mathbf{f} - \mathbf{p}_d^*\|_2), & y = 0 \\ \|\mathbf{f} - \mathbf{p}_d^*\|_2 + \max(0, m - \|\mathbf{f} - \mathbf{p}_n^*\|_2), & y = 1 \end{cases} \quad (3)$$

where $\mathbf{p}_n^* = \arg \min_{\mathbf{p} \in \mathcal{P}_n} \|\mathbf{f} - \mathbf{p}\|_2$, $\mathbf{p}_d^*$ is defined analogously, and $m = 1$ is the margin boundary. This loss pulls the sample closer to the prototypes of its ground-truth class while pushing it away from the prototypes of the opposite class, thereby enhancing inter-class separability.

Prototype dispersion loss To prevent prototype collapse and promote intra-class diversity, we introduce a prototype dispersion regularization:

$$\mathcal{L}_{disp} = \sum_{i < j}^{K_n} \exp\left(-\frac{\|\mathbf{p}_n^{(i)} - \mathbf{p}_n^{(j)}\|_2}{\tau}\right) + \sum_{i < j}^{K_d} \exp\left(-\frac{\|\mathbf{p}_d^{(i)} - \mathbf{p}_d^{(j)}\|_2}{\tau}\right). \quad (4)$$

where $\tau > 0$ is a temperature hyperparameter. Minimizing $\mathcal{L}_{disp}$ encourages large pairwise distances within each set of prototypes, thus preventing prototype collapse. The total loss is defined as:

$$\mathcal{L}_{total} = \mathcal{L}_{det} + \lambda_1 \mathcal{L}_{cont} + \lambda_2 \mathcal{L}_{disp}, \quad (5)$$

where $\mathcal{L}_{det}$ denotes the detection loss, and the hyperparameters are set to $\lambda_1 = 1.0$ and $\lambda_2 = 0.1$. All parameters, including prototypes and scalars α, β , are learned end-to-end.

3.3 Dual-entropy Defect Uncertainty Evaluator

To enable real-time assessment of adversarial risks, we introduce DeUE to evaluate the uncertainty of each bounding box. As shown in Fig. 3 (b), for each object query, the detection head outputs the classification probability p_c , the center coordinates (x, y) , and the boundary offset probabilities p_l for (l, t, r, b) . From p_c and p_l we derive the confidence $conf$, classification entropy H_{cls} and localization entropy H_{loc} to jointly quantify each box's uncertainty. The formulas are:

$$\begin{cases} conf = \max(p_c) \\ H_{cls} = -\sum_{c=1}^C p_c \cdot \log(p_c) \\ H_{loc} = -\frac{1}{4} \sum_{k \in \{l, t, r, b\}} \sum_{l=1}^K p_l^k \cdot \log(p_l^k) \end{cases} \quad (6)$$

Here p_l^k denotes the output of the localization head with $K = 16$ bins, and p_c denotes the output of the classification head ($C = 5$). We normalize both entropies by their theoretical maxima.

$$\tilde{H}_{cls} = \frac{H_{cls}}{\log C}, \quad \tilde{H}_{loc} = \frac{H_{loc}}{\log K} \quad (7)$$

We define the box-level defect uncertainty $U_d^{(box)}$ as a weighted aggregation of these normalized components:

$$U_d^{(box)} = \frac{1}{w_1 + w_2 + 1} \left(w_1 \tilde{H}_{cls} + w_2 \tilde{H}_{loc} + 1 - conf \right) \quad (8)$$

For images with multiple detected objects, we define U_d as:

$$U_d = \max_{b \in \mathcal{B}} U_d^{(box)}(b) \quad (9)$$

where $\mathcal{B}$ is the set of all predicted boxes. Consequently, $U_d \in [0, 1]$, with higher values indicating a greater defect uncertainty in detection.

3.4 Fuzzy Dual-dimension Uncertainty Active Learning

To balance model reliability and efficiency in dynamic industrial inspection, we employ AL to prioritize the sampling of images that are expected to maximize detector gains, namely false-negative (FN) and false-positive (FP) samples. The correlation between uncertainties (U_g/U_d) and these errors is shown in Fig. 2 (b). Accordingly, we propose FuDU, which uses a Fuzzy Inference System (FIS) to dynamically assign sampling probabilities.

Fuzzification and Membership Functions As shown in Fig. 3 (c), FuDU first fuzzifies normalized inputs U_g and U_d (both $\in [0, 1]$) using trapezoidal membership functions. Each input is mapped to four linguistic variables: Very Low (VL), Low (L), High (H), and Very High (VH). The membership function $\mu(x)$ for a trapezoidal set defined by parameters (a, b, c, d) is given by:

$$\mu(x; a, b, c, d) = \max \left(0, \min \left(\frac{x - a}{b - a}, 1, \frac{d - x}{d - c} \right) \right) \quad (10)$$

where the parameters (a, b, c, d) for each linguistic variable are initialized based on nuclear inspection safety standards and fine-tuned on a pilot validation set. The precise parameter values used in this study are listed in the supplementary material.

Rule Base and Inference The output space is defined by four fuzzy sets corresponding to sampling actions: Do Not Sample (DNS), Low-frequency Sample (LS), High-frequency Sample (HS), and Must Sample (MS). The fuzzy rule base follows a "Safety-First" principle designed in collaboration with domain experts. The complete rule matrix is provided in Fig. 3 (c), governed by three core logic principles:

- **Critical Risk Override:** If either U_g or U_d is VH, the output is MS. This ensures novel defects or severe domain shifts are never missed (100% sampling).
- **Certainty Suppression:** If both uncertainties are VL or L, the output is DNS or LS. This minimizes annotation costs for confident, normal samples.
- **Balanced Exploration:** If one uncertainty is H while the other is L/VL, the output is HS. This balances cost and potential gain for borderline cases.

Following the Mamdani inference method, inputs undergo fuzzification, rule activation (using min-operator), and aggregation (using max-operator) in Eq. (10).

Defuzzification and Probability Mapping To ensure deterministic handling of high-risk samples while maintaining stochasticity for exploration, we employ a hybrid defuzzification strategy. First, we apply the max membership principle to select the optimal output linguistic set $S^* = \arg \max_{S \in \{DNS, LS, HS, MS\}} \mu_{output}(S)$. This avoids the smoothing effect of Centroid defuzzification, ensuring that ‘Must Sample’ cases are not probabilistically diluted. Then, the selected set S^* is mapped to a fixed sampling probability P_{sample} : $P_{DNS} = 0, P_{LS} = 0.1, P_{HS} = 0.5, P_{MS} = 1.0$. For each image, a random number $r \sim \mathcal{U}(0, 1)$ is generated. The image is selected for annotation if $r < P_{sample}$. This procedure yields continuous expected sampling rates while guaranteeing that critical defects (MS) are always captured.

In summary, our FuDU transforms raw detection metrics into interpretable sampling actions through fuzzy logic. By bridging quantitative uncertainty with qualitative expert rules, FuDU establishes a robust mechanism for high-stakes inspection that balances annotation efficiency with reliability.

4 Experimental evaluation

4.1 Dataset and Experimental Setup

To validate FuDU, we build a nuclear fuel rod defect dataset, split into three subsets: I. 1000 labeled images for initial model training and prototype library construction; II. a 1000-image test set for post-iteration evaluation; III. 2000 unlabeled images, partitioned into four 500-image batches to simulate real-world streaming defect inspection data. The dataset encompasses four categories: abrasion, dent, scratch, and foreign objects, with statistics and details provided in the supplementary material.

In evaluation, the FuDU framework executes a practical workflow: it iteratively conducts sampling and active learning on each batch, with subsequent validation on Subset II. All experiments are conducted using PyTorch on RTX 4090 GPU, with images preprocessed to 640×640 pixels.

4.2 Main Results

Quantitative Analysis of Detection Performance Tab. 1 compares the performance of FuDU with six other methods. The evaluation covers standard

Table 1: Detection Results (mAP_{50}) of Different AL Methods on the Nuclear Fuel Rod Defect Dataset. The best scores are highlighted in **bold**.

Method	R1	R2	R3	R4	Mean P (%)	R (%)	F1	Ratio	Stream	FPS	
Random	83.8±1.1	84.3±0.9	84.5±1.1	85.3±1.0	84.5	15.3	16.6	15.9	16.0%	✓	16.8
Conf	85.1±1.4	86.8±0.9	88.0±0.5	88.7±0.5	87.2	69.3	63.4	66.2	13.5%	✓	16.8
QBC [49]	86.7 ±2.0	88.8±1.8	89.8±1.1	89.9±0.6	88.8	74.1	72.5	73.3	14.5%	×	0.9
SPENet [21]	86.0±1.8	87.7±1.4	90.9±0.8	93.5±0.4	89.5	49.9	87.5	63.6	25.9%	×	4.4
PPAL [42]	83.7±0.9	84.0±1.0	84.8±0.6	85.1±0.7	84.4	15.9	15.3	15.6	16.0%	×	6.9
<i>Oracle</i>	87.1±1.9	92.9±1.6	95.8±0.7	96.4±0.1	93.1	14.8	100.0	25.7	100.0%	✓	16.8
FuDU	86.4±1.4	91.9 ±1.5	94.3 ±0.8	96.0 ±0.3	92.2	95.1	99.3	97.1	15.4%	✓	12.3

strategies such as **Random** sampling (at a fixed ratio) and **Conf** (using a confidence threshold of $0.2 < o < 0.8$), alongside the ensemble-based **QBC**, which selects samples via detector discrepancy across three models. We also include two novel pool-based methods: **SPENet**, which employs an FN prediction module to estimate box counts, and **PPAL**, which ranks samples by fusing uncertainty with diversity. The **Oracle** setting represents the theoretical upper bound, where all images are fully annotated. We set the *random* and score-based *PPAL* ratio at 16%, corresponding to 320 labeled images (close to the 295 defective samples).

To account for the stochasticity in streaming order and batch partitioning, we repeat each experiment with five random seeds (shuffling the subset III before partitioning into four 500-image batches). We report the mean $\pm$ standard deviation of mAP_{50} for each round, the average mAP_{50} , the precision of defect detection (P), recall (R), F1 score and the sampling ratio. This protocol ensures that our conclusions are not biased by a specific data order and reflect the method’s stability under realistic streaming conditions. The results show that: **A.** Random sampling fails to support model updates, showing minimal per-round improvement ($< 1mAP$) and low precision/recall $< 20\%$. This indicates poor selection, with many normal samples mistaken for uncertain cases. **B.** Confidence-based methods yield better gains, but still miss false negatives. **C.** Among pool-based AL methods, QBC and SPENet achieve high recall and steady improvements, while PPAL underperforms due to poor scenario adaptability. **D.** *Oracle* provides the performance upper bound but is not strictly an AL method, as it requires manual review and labeling of all images, leading to low efficiency and high costs. **E.** Our FuDU achieves the optimal trade-off, enabling significant per-round improvements with a 99.3% recall rate for defects, making it ideal for high-reliability scenarios such as nuclear fuel rod defect detection. In terms of inference efficiency, FuDU is surpassed only by Random, Conf, and Oracle, which incur no additional inference cost. It outperforms Faster R-CNN-based methods such as PPAL and SPENet, and achieves a 13 $\times$ speedup over QBC, which requires multi-model ensemble inference.

Qualitative Analysis of Uncertainty Evolution Fig. 4 visualizes the detection results and uncertainty scores of images before (Row 1) and after (Row 2)

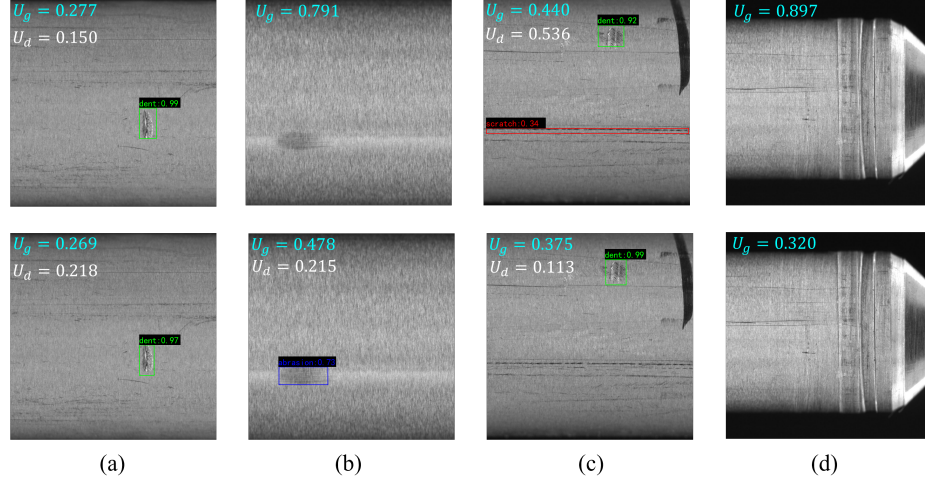


Fig. 4: Visualization of uncertain samples and detection improvements across FuDU-based AL iterations.

active learning. For Fig. 4 (a), U_g is 0.277, corresponding to Low (L) uncertainty in the fuzzy linguistic variables; U_d is 0.150, lying on the boundary between Very Low (VL) and Low (L) with a membership degree of 0.5 for each. Based on fuzzy inference, the inferred action is Low-frequency Sample (LS), i.e., a 10% sampling probability. Although this image was not selected, re-inference after active learning (Row 2) shows the model still accurately identifies the defect, with U_g even decreasing. This is because active learning updated the prototypes, making the model more certain about images with such backgrounds. For Fig. 4 (b), U_g is 0.791, corresponding to Very High (VH) uncertainty. In this case, the model is highly likely to miss detections (False Negatives), so the corresponding fuzzy rule is Must Sample (MS). After active learning, re-inference shows its global uncertainty dropped to 0.478. More importantly, the model can now detect the abrasion defect with lower uncertainty ($U_d = 0.215$). Fig. 4 (c) illustrates another circumstance in which high U_d indicates that the model is uncertain about the detected defects. Clearly, in Row 1, the high U_d corresponds to the red bounding box misclassified as a scratch defect. After active learning, this error is corrected and both U_g and U_d decrease. Fig. 4 (d) confirms that sampling normal samples with high U_g is also necessary, as prototype updates help reduce the model’s uncertainty regarding domain shifts.

4.3 Ablation Study

Global uncertainty To comprehensively evaluate the effectiveness of the PGUQ module, we conduct multi-dimensional ablation studies. First, we investigate the sensitivity to the number of prototype clusters k . As shown in Table 2, setting k too small ($k = 10$) results in insufficient coverage of the feature space. This

Table 2: Impact of Prototype Cluster Number k , Update Strategy, and Reconstruction-based Baselines. The best mAP scores are highlighted in **bold**.

U_g	R1	R2	R3	R4	Mean	Ratio	FPS
$k=10$	86.8	92.7	93.5	94.9	92.0	40.5%	13.1
$k=20$	86.1	91.9	92.9	93.2	91.0	31.7%	12.9
$k=20^*$	86.1	86.8	88.0	89.7	87.7	36.5%	12.9
$k=50$	86.4	91.9	94.3	96.0	92.2	15.4%	12.3
$k=50^*$	86.4	91.0	92.8	93.1	90.8	21.5%	12.3
$k=100$	84.7	88.8	90.0	90.4	88.5	9.8%	8.8
CD	85.8	88.7	90.8	93.4	89.7	25.6%	7.0
FAE	86.0	87.9	89.3	91.8	88.8	20.4%	9.3

causes many samples to be perceived as outliers, leading to inflated uncertainty scores and consequently an excessively high annotation ratio (40.5%), despite a competitive mean mAP of 92.0%. Conversely, an excessively large number of prototypes ($k = 100$) makes the prototypes difficult to update effectively during training, resulting in a sampling ratio that is too low (9.8%) to capture informative samples, which degrades the mean mAP to 88.5%. The optimal balance is achieved at ($k = 50$), yielding the highest mean mAP of 92.2% with an efficient annotation ratio of 15.4%.

Second, we compare the prototype update strategy: end-to-end learnable static prototypes ($k = 50$) significantly outperform re-clustering to generate prototypes after each AL round ($k = 50^*$), with mean mAP dropping from 92.2% to 90.8% and the annotation ratio increasing from 15.4% to 21.5%. This indicates that maintaining prototype stability helps the model better adapt to domain shifts and avoids distribution oscillations caused by frequent reconstruction.

Finally, we compare our prototype-based method against two reconstruction-based uncertainty estimation approaches. A Convolutional Decoder (CD) reconstructs the image X' from features F , using the $X - X'$ error as U_g . A Feature Autoencoder (FAE) reconstructs the feature map F' from F , using the $F - F'$ error. The results indicate that both methods exhibit limited efficiency and fail to effectively improve the mean average precision.

Defect uncertainty To investigate the contribution of each component in the DeUE, we conduct ablation studies on the weight configuration (w_1, w_2) for classification entropy $\tilde{H}_{cls}$ and localization entropy $\tilde{H}_{loc}$. As shown in Table 3, the first row represents sampling based solely on global uncertainty U_g without evaluating defect uncertainty U_d (Conf= $\times$), yielding a mean mAP of 89.6%. The second row incorporates confidence scores alongside U_g (i.e., $w_1 = 0, w_2 = 0$), slightly improving performance to 90.2%. However, introducing entropy terms proves more effective. Configurations using confidence combined with localization entropy ($w_1 = 0, w_2 = 1$) or equal weights for all three terms $w_1 = 1, w_2 = 1$ achieve competitive results (91.2% and 91.7% respectively). Notably, when w_1 is excessively large $w_1 = 2, w_2 = 1$, performance declines to 89.8%. This is

Table 3: Impact of Classification Entropy Weight w_1 and Localization Entropy Weight w_2 . The best mAP scores are highlighted in **bold**.

<i>Conf</i>	w_1	w_2	R1	R2	R3	R4	Mean	Ratio
×	0	0	85.8	88.3	91.6	92.7	89.6	14.6%
✓	0	0	86.0	90.2	91.6	93.1	90.2	15.0%
✓	1	0	85.8	90.1	91.8	93.5	90.3	14.9%
✓	0	1	86.3	90.4	93.0	94.9	91.2	15.8%
✓	1	1	87.0	91.3	93.2	95.4	91.7	16.0%
✓	2	1	84.5	90.0	91.5	93.3	89.8	16.5%
✓	1	2	86.4	91.9	94.3	96.0	92.2	15.4%
✓	1	4	86.9	91.6	94.0	95.7	92.1	17.3%

Table 4: Ablation Study of Sampling Strategies. Values in parentheses denote mAP improvements over the initial detector, and the best results are highlighted in **bold**.

Sampling Strategies	R4 (↑)	Mean	P(%)	R(%)	Ratio
Bilinear	92.2 (9.0)	89.1	42.3	79.0	27.6%
Quadratic	93.0 (9.8)	89.2	63.1	84.7	19.8%
Threshold	95.6 (12.4)	92.0	88.2	98.6	16.5%
Sigmoid	94.7 (11.5)	90.9	61.7	97.6	23.4%
FuDU	96.0 (12.8)	92.2	95.1	99.3	15.4%

because confidence and classification uncertainty are positively correlated, both reflecting category ambiguity, whereas they form a complementary relationship with localization uncertainty. Over-emphasizing w_1 leads to redundant information weighting. Conversely, over-weighting localization entropy ($w_1 = 1$, $w_2 = 4$) maintains high accuracy (92.1%) but significantly increases the annotation ratio to 17.3%, raising the labeling cost. The configuration $w_1 = 1$, $w_2 = 2$ achieves the optimal balance, delivering the highest mean mAP of 92.2% with an efficient annotation ratio of 15.4%. Therefore, we adopt $w_1 = 1$, $w_2 = 2$ as the default setting.

Sampling strategies As shown in Table 4, FuDU is compared with four typical sampling strategies under identical settings. It significantly outperforms all baselines, achieving 96.0% mAP and 99.3% recall with only 15.4% annotated samples. This indicates an optimal balance between accuracy, recall, and annotation efficiency, validating its precision in selecting informative samples. The Hard-Threshold method, despite competitive performance, suffers from rigid partitioning and threshold sensitivity, easily missing valuable boundary samples. In contrast, FuDU enables finer-grained sample ranking via fuzzy rules. Among smoothing functions, Quadratic and Sigmoid outperform Bilinear, confirming that suppressing low-uncertainty responses is crucial for sampling quality. Notably, Sigmoid achieves 97.6% recall (close to Hard-Threshold) but requires more annotations (23.4% ratio) than FuDU. In summary, FuDU achieves state-of-the-art detection performance at low annotation costs, proving the effectiveness and superiority of its designed uncertainty fusion mechanism. The values in paren-

Table 5: Detection Results (mAP_{50}) under the Finer-grained 10-Batch Streaming Setting. The best AL mAP scores are highlighted in **bold**, while *Oracle* denotes the full-annotation upper bound.

Method	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	Ratio
Random	83.3 $\pm$ 0.1	83.6 $\pm$ 0.2	83.8 $\pm$ 0.3	84.1 $\pm$ 0.5	84.4 $\pm$ 0.7	84.5 $\pm$ 0.8	84.9 $\pm$ 0.9	85.0 $\pm$ 1.1	85.1 $\pm$ 1.3	85.4 $\pm$ 1.1	16.0%
Conf	83.9 $\pm$ 0.2	84.4 $\pm$ 0.3	85.0 $\pm$ 0.4	85.6 $\pm$ 0.3	86.7 $\pm$ 0.1	87.8 $\pm$ 0.9	88.3 $\pm$ 0.8	88.8 $\pm$ 0.7	89.0 $\pm$ 0.4	88.9 $\pm$ 0.2	10.9%
QBC [49]	83.4 $\pm$ 0.2	83.8 $\pm$ 0.4	84.4 $\pm$ 0.5	85.6 $\pm$ 0.5	88.1 $\pm$ 1.1	87.8 $\pm$ 0.8	89.5 $\pm$ 0.4	89.7 $\pm$ 0.4	89.8 $\pm$ 0.3	90.1 $\pm$ 0.2	16.3%
SPENet [21]	84.0 $\pm$ 0.3	84.9 $\pm$ 0.2	85.5 $\pm$ 0.6	87.0 $\pm$ 1.1	87.9 $\pm$ 0.4	90.4 $\pm$ 0.4	91.9 $\pm$ 0.4	92.1 $\pm$ 0.5	92.9 $\pm$ 0.3	93.7 $\pm$ 0.2	28.8%
PPAL [42]	83.7 $\pm$ 0.5	83.6 $\pm$ 0.2	83.9 $\pm$ 0.5	84.5 $\pm$ 0.4	84.5 $\pm$ 0.4	84.5 $\pm$ 0.4	84.8 $\pm$ 0.3	84.9 $\pm$ 0.3	85.3 $\pm$ 0.3	85.3 $\pm$ 0.2	16.0%
<i>Oracle</i>	85.1 $\pm$ 0.4	86.4 $\pm$ 0.6	87.5 $\pm$ 0.6	88.8 $\pm$ 0.8	89.9 $\pm$ 1.4	91.8 $\pm$ 1.0	93.1 $\pm$ 0.3	95.0 $\pm$ 0.3	96.1 $\pm$ 0.2	96.6 $\pm$ 0.1	100.0%
FuDU	84.0 $\pm$ 0.4	85.6 $\pm$ 1.0	86.8 $\pm$ 1.4	88.8 $\pm$ 1.4	90.8 $\pm$ 1.1	91.5 $\pm$ 0.9	92.3 $\pm$ 1.1	94.3 $\pm$ 1.0	95.5 $\pm$ 0.2	96.1 $\pm$ 0.1	14.9%

Table 6: Cross-Architecture Generalization of FuDU-Based and Confidence-Based AL Strategies. Values in parentheses denote mAP improvements over the initial detector, and the better results within each architecture are highlighted in **bold**.

Backbone	Head	Method	R4 ($\uparrow$)	Mean P(%)	R(%)	Ratio
Swin [17]	RT-DETR	Conf	90.0 (4.8)	87.3	59.1	60.3 15.1%
		FuDU	92.5 (7.3)	91.6	93.7	97.3 15.0%
ViTDet [16]	RT-DETR	Conf	86.3 (4.2)	84.2	63.6	65.8 15.3%
		FuDU	91.1 (9.0)	90.3	93.2	98.3 15.6%
RN50	DEIM [12]	Conf	85.7 (5.0)	83.4	66.9	67.8 15.0%
		FuDU	89.9 (9.2)	87.6	93.0	99.0 15.7%
RN50	MR-DETR [46]	Conf	88.9 (4.3)	87.8	69.1	63.7 13.6%
		FuDU	94.3 (9.7)	92.4	92.4	99.3 15.9%
RN50	MI-DETR [22]	Conf	88.5 (3.9)	86.6	83.3	64.9 11.1%
		FuDU	95.6 (11.2)	93.2	95.4	99.0 15.3%

theses following R4 denote the performance improvement (mAP) relative to the model’s initial evaluation on the held-out test set before any active learning iterations.

4.4 Generalization and Flexibility Experiments

Flexibility Validation with Different Batch Settings To verify the flexibility and practicality of the proposed FuDU framework, we further adopt a finer-grained setting for the original 2000 images: 10 batches with 200 images per batch. The experimental results are shown in Tab. 5, which demonstrates that the FuDU framework maintains stable and consistent detection performance under both batch configurations. This indicates that the proposed method can flexibly adapt to various data partitioning strategies without performance degradation. Such flexibility is beneficial for practical industrial deployment, since the scale and batch arrangement of input data often vary in real-world scenarios.

Modularity and Generality Across Different Backbones and Detectors FuDU computes uncertainty at both the backbone and detection head, making it compatible with other detectors of similar architectures. To validate its generalizability, we extend FuDU to Transformer based backbones (Swin [17],

Table 7: Cross-Dataset Generalization Results (mAP_{50}) on the Public ELES Dataset. The best AL results are highlighted in **bold**, while *Oracle* denotes the full-annotation upper bound.

Method	R1	R2	R3	R4	Mean P (%)	R (%)	Ratio
Random	75.8 $\pm$ 0.9	78.0 $\pm$ 1.0	80.4 $\pm$ 0.8	83.3 $\pm$ 2.4	79.4	40.5	40%
Conf	76.6 $\pm$ 1.6	79.7 $\pm$ 0.7	82.0 $\pm$ 0.9	86.4 $\pm$ 1.0	81.2	65.4	48.6 29.8%
QBC [49]	77.7 $\pm$ 2.5	81.9 $\pm$ 1.1	85.5 $\pm$ 1.4	89.0 $\pm$ 1.2	83.5	90.0	72.1 32.1%
SPENet [21]	77.2 $\pm$ 1.0	82.1 $\pm$ 1.6	85.0 $\pm$ 1.4	88.6 $\pm$ 0.9	83.2	69.5	59.2 47.0%
PPAL [42]	77.8 $\pm$ 1.8	80.8 $\pm$ 1.2	82.6 $\pm$ 1.1	85.7 $\pm$ 1.5	81.7	41.8	41.8 40%
<i>Oracle</i>	80.9 $\pm$ 0.6	84.5 $\pm$ 0.5	89.7 $\pm$ 0.8	91.2 $\pm$ 0.2	86.6	40.0	100.0 100%
FuDU	80.5$\pm$1.4	84.9$\pm$0.8	87.0$\pm$0.3	90.4$\pm$0.1	85.7	86.4	97.1 45.0%

ViTDet [16]) and SOTA detection heads (DEIM [12], MR-DETR [46], MI-DETR [22]) comparing its performance against a confidence-based AL baseline. The results in Table 6 confirm that FuDU enables efficient model iteration across diverse detectors, demonstrating clear cross-architecture generalization.

Cross-Dataset Generalization We further validate FuDU on the public ELES dataset [52] via four AL rounds using 2,000 photovoltaic cell inspection images, including 800 defective samples. For cross-dataset transfer, FuDU keeps the fuzzy rule base and sampling-probability mapping unchanged, while only lightly recalibrating the membership boundaries according to the target uncertainty distribution. The results in Table 7 show that FuDU achieves the most substantial performance gains among all AL methods, with a recall rate ($>97\%$) second only to *Oracle*. This indicates that FuDU can generalize to different industrial inspection scenarios without exhaustive expert rule redesign. Detailed configurations are provided in the supplementary material.

5 Conclusion

This paper addresses the challenge of reliable defect detection with limited annotations by proposing FuDU, a stream-based active learning method built on a fuzzy dual-dimensional uncertainty framework. FuDU features a Prototype-based Global Uncertainty Quantification (PGUQ) module and a Dual-Entropy Uncertainty Evaluator (DeUE), which integrate data uncertainty with domain knowledge to form an expert-informed sampling strategy. Experiments show that FuDU achieves state-of-the-art performance—96.0% mAP and 99.3% recall—while requiring only 15.4% of samples, significantly surpassing existing strategies. In conclusion, FuDU meets the stringent needs for real-time, reliable defect detection and offers a practical pathway for intelligent quality inspection systems to evolve from passive updating to active self-evolution.

Acknowledgements

This work was supported in part by the National Natural Science Foundation of China No. 62473127, the S&T Program of Hebei Province No. 242Q4302Z, the National Key Research and Development Program of China No. 2024YFB3310904, the Interdisciplinary Postgraduate Training Program of Hebei University of Technology No.HEBUT-Y-XKJC-2023002, and the China Scholarship Council No. 202506700027.

References

1. Aqeel, M., Sharifi, S., Cristani, M., Setti, F.: Towards real unsupervised anomaly detection via confident meta-learning. In: Proceedings of the IEEE/CVF International Conference on Computer Vision. pp. 4858–4867 (2025)
2. Cacciarelli, D., Kulahci, M.: Active learning for data streams: a survey. *Machine Learning* **113**(1), 185–239 (2024)
3. Cao, Y., Zhang, J., Frittoli, L., Cheng, Y., Shen, W., Boracchi, G.: Adapclip: Adapting clip with hybrid learnable prompts for zero-shot anomaly detection. In: European conference on computer vision. pp. 55–72. Springer (2024)
4. Chen, Q., Luo, H., Lv, C., Zhang, Z.: A unified anomaly synthesis strategy with gradient ascent for industrial anomaly detection and localization. In: European Conference on Computer Vision. pp. 37–54. Springer (2024)
5. Choi, J., Elezi, I., Lee, H.J., Farabet, C., Alvarez, J.M.: Active learning for deep object detection via probabilistic modeling. In: Proceedings of the IEEE/CVF International Conference on Computer Vision. pp. 10264–10273 (2021)
6. Djenouri, Y., Srivastava, G., Lin, J.C.W.: Applied ai in defect detection for additive manufacturing: Current literature, metrics, datasets, and open challenges. *IEEE Instrumentation & Measurement Magazine* **27**(4), 46–53 (2024). <https://doi.org/10.1109/MIM.2024.10540405>
7. Feng, D., Wei, X., Rosenbaum, L., Maki, A., Dietmayer, K.: Deep active learning for efficient training of a lidar 3d object detector. In: 2019 IEEE Intelligent Vehicles Symposium (IV). pp. 667–674. IEEE (2019)
8. Fu, Y., Wang, Y., Pan, Y., Huai, L., Qiu, X., Shangguan, Z., Liu, T., Fu, Y., Van Gool, L., Jiang, X.: Cross-domain few-shot object detection via enhanced open-set object detector. In: European Conference on Computer Vision. pp. 247–264. Springer (2024)
9. Gal, Y., Islam, R., Ghahramani, Z.: Deep bayesian active learning with image data. In: International conference on machine learning. pp. 1183–1192. PMLR (2017)
10. Ge, Q., Wu, R., Wu, Y., Liu, H.: A class-incremental learning method for pcb defect detection. *IEEE Transactions on Instrumentation and Measurement* (2025)
11. Gu, X., Han, J., Shen, Q., Angelov, P.P.: Autonomous learning for fuzzy systems: a review. *Artificial Intelligence Review* **56**(8), 7549–7595 (2023)
12. Huang, S., Lu, Z., Cun, X., Yu, Y., Zhou, X., Shen, X.: Deim: Detr with improved matching for fast convergence. In: 2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR). pp. 15162–15171 (2025). <https://doi.org/10.1109/CVPR52734.2025.01412>
13. Kim, W., Lee, J., Shim, J., Cho, S., Cho, H.: Fuzzy logic-based filtering for defect detection in automated x-ray inspection during the production of lithium-ion battery pouch cells. *Nuclear Engineering and Technology* **57**(10), 103739 (2025)

14. Lee, H., Kim, S., Lee, J., Yoo, J., Kwak, N.: Coreset selection for object detection. In: 2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW). pp. 7682–7691 (2024). <https://doi.org/10.1109/CVPRW63382.2024.00764>
15. Li, D., Wang, Z., Chen, Y., Jiang, R., Ding, W., Okumura, M.: A survey on deep active learning: Recent advances and new frontiers. *IEEE Transactions on Neural Networks and Learning Systems* **36**(4), 5879–5899 (2025). <https://doi.org/10.1109/TNNLS.2024.3396463>
16. Li, Y., Mao, H., Girshick, R., He, K.: Exploring plain vision transformer backbones for object detection. In: European conference on computer vision. pp. 280–296. Springer (2022)
17. Liu, Z., Lin, Y., Cao, Y., Hu, H., Wei, Y., Zhang, Z., Lin, S., Guo, B.: Swin transformer: Hierarchical vision transformer using shifted windows. In: 2021 IEEE/CVF International Conference on Computer Vision (ICCV). pp. 9992–10002 (2021). <https://doi.org/10.1109/ICCV48922.2021.00986>
18. Lughofer, E., Pratama, M.: Online active learning in data stream regression using uncertainty sampling based on evolving generalized fuzzy models. *IEEE Transactions on Fuzzy Systems* **26**(1), 292–309 (2018). <https://doi.org/10.1109/TFUZZ.2017.2654504>
19. Lv, X., Chen, H., Wang, Z.: Cross domain anomaly detection in semiconductor manufacturing via projection comparison and reconstruction in latent space. *IEEE Transactions on Semiconductor Manufacturing* pp. 1–1 (2026). <https://doi.org/10.1109/TSM.2026.3665531>
20. Mamdani, E.H., Assilian, S.: An experiment in linguistic synthesis with a fuzzy logic controller. *International journal of man-machine studies* **7**(1), 1–13 (1975)
21. Nakamura, Y., Ishii, Y., Yamashita, T.: Active domain adaptation with false negative prediction for object detection. In: 2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR). pp. 28782–28792 (2024). <https://doi.org/10.1109/CVPR52733.2024.02719>
22. Nan, Z., Li, X., Dai, J., Xiang, T.: Mi-detr: An object detection model with multi-time inquiries mechanism. In: 2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR). pp. 4703–4712 (2025). <https://doi.org/10.1109/CVPR52734.2025.00443>
23. Park, Y., Choi, W., Kim, S., Han, D.J., Moon, J.: Active learning for object detection with evidential deep learning and hierarchical uncertainty aggregation. In: The Eleventh International Conference on Learning Representations (2023)
24. Popp, N., Zhang, D., Metzen, J.H., Hein, M., Schott, L.: Foundation model-based data selection for dense prediction tasks. In: ICLR 2025 Workshop on Foundation Models in the Wild
25. Precup, R.E., Preitl, S.: Stability and sensitivity analysis of fuzzy control systems. mechatronics applications. *Acta Polytechnica Hungarica* **3**(1), 61–76 (2006)
26. Ren, L., Wang, H., Dong, J., Jia, Z., Li, S., Wang, Y., Laili, Y., Huang, D., Zhang, L., Li, B.: Industrial foundation model. *IEEE Transactions on Cybernetics* **55**(5), 2286–2301 (2025). <https://doi.org/10.1109/TCYB.2025.3527632>
27. Rudin, C.: Stop explaining black box machine learning models for high stakes decisions and use interpretable models instead. *Nature machine intelligence* **1**(5), 206–215 (2019)
28. Shi, Q., Wei, J., Shen, F., Zhang, Z.: Few-shot defect image generation based on consistency modeling. In: European Conference on Computer Vision. pp. 360–376. Springer (2024)

29. Shi, Y., Gao, B., Yang, G., Li, H., Woo, W.L.: Industrial anomaly detection system: a multicas algorithm leveraging feature information and memory bank. *IEEE Transactions on Instrumentation and Measurement* (2025)
30. Su, J., Luo, Q., Gui, W., Yang, C.: Few-shot parameter efficient finetuning for sam in salient steel surface defect detection. *IEEE Transactions on Industrial Informatics* (2025)
31. Takagi, T., Sugeno, M.: Fuzzy identification of systems and its applications to modeling and control. *IEEE transactions on systems, man, and cybernetics* (1), 116–132 (1985)
32. Tang, J., Lu, H., Xu, X., Wu, R., Hu, S., Zhang, T., Cheng, T.W., Ge, M., Chen, Y.C., Tsung, F.: An incremental unified framework for small defect inspection. In: *European conference on computer vision*. pp. 307–324. Springer (2024). https://doi.org/https://doi.org/10.1007/978-3-031-72751-1_18
33. Vo, H.V., Siméoni, O., Gidaris, S., Bursuc, A., Pérez, P., Ponce, J.: Active learning strategies for weakly-supervised object detection. In: *European conference on computer vision*. pp. 211–230. Springer (2022)
34. Wang, J., Zhao, N.: Uncertainty meets diversity: A comprehensive active learning framework for indoor 3d object detection. In: *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. pp. 20329–20339 (2025). <https://doi.org/10.1109/CVPR52734.2025.01893>
35. Wang, S., Chen, H., Liu, K., Zhou, Y., Feng, H.: Meta-fsdet: A meta-learning based detector for few-shot defects of photovoltaic modules. *Journal of Intelligent Manufacturing* **34**(8), 3413–3427 (2023)
36. Wang, S., Chen, H., Su, B., Wang, Z.: Semantic mining and domain correction network for online defect detection of photovoltaic data streams with nonstationary distributions. *IEEE Sensors Journal* **25**(4), 7519–7531 (2025). <https://doi.org/10.1109/JSEN.2024.3521593>
37. Wang, S., Chen, H., Zhang, Z., Su, B.: Multi-scale feature decoupling and similarity distillation for class-incremental defect detection of photovoltaic cells. *Measurement* **225**, 113997 (2024)
38. Wang, Z., Chen, H., Cao, Z.: Cpdd: A cross-scenario photovoltaic defect detector based on fine-grained feature autoencoding and pseudo-box contrastive learning. *IEEE Transactions on Semiconductor Manufacturing* **38**(3), 612–623 (2025). <https://doi.org/10.1109/TSM.2025.3570323>
39. Wang, Z., Gao, Q., Li, D., Liu, J., Wang, H., Yu, X., Wang, Y.: Insulator anomaly detection method based on few-shot learning. *IEEE Access* **9**, 94970–94980 (2021). <https://doi.org/10.1109/ACCESS.2021.3071305>
40. Wang, Z., Fan, Z., Tan, S., Zhong, Y., Yuan, Y., Li, H., Jiang, H., Zhang, W., Shao, F., Wang, H., Xiao, J.: Mau-gpt: Enhancing multi-type industrial anomaly understanding via anomaly-aware and generalist experts adaptation. In: *Proceedings of the AAAI Conference on Artificial Intelligence*. vol. 40, pp. 26787–26795 (2026)
41. Xu, J., Lo, S.Y., Safaei, B., Patel, V.M., Dwivedi, I.: Towards zero-shot anomaly detection and reasoning with multimodal large language models. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. pp. 20370–20382 (June 2025)
42. Yang, C., Huang, L.: Plug and play active learning for object detection. In: *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. pp. 17784–17793 (2024). <https://doi.org/10.1109/CVPR52733.2024.01684>

43. Yang, J., Wu, J., Xiao, S., Wen, J., Meng, Q., Lu, W., Gao, X.: Active learning for object detection with vectorized dual pseudo loss and multiple instance offset constraint. *IEEE Transactions on Cybernetics* **55**(9), 4427–4440 (2025). <https://doi.org/10.1109/TCYB.2025.3584808>
44. Yang, S., Chen, Z., Chen, P., Fang, X., Liang, Y., Liu, S., Chen, Y.: Defect spectrum: A granular look of large-scale defect datasets with rich semantics. In: *European Conference on Computer Vision*. pp. 187–203. Springer (2024)
45. Zadeh, L.A.: Fuzzy sets. *Information and control* **8**(3), 338–353 (1965)
46. Zhang, C.B., Zhong, Y., Han, K.: Mr. detr: Instructive multi-route training for detection transformers. In: *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. pp. 9933–9943 (2025). <https://doi.org/10.1109/CVPR52734.2025.00928>
47. Zhang, D., Deng, H., Wang, H., Du, Z.: Fast: Foreground-aware active self-training for domain adaptive object detection. *Neural Networks* p. 108201 (2025)
48. Zhang, X.Y., Liu, C.L., Suen, C.Y.: Towards robust pattern recognition: A review. *Proceedings of the IEEE* **108**(6), 894–922 (2020). <https://doi.org/10.1109/JPROC.2020.2989782>
49. Zhao, D., Shen, H.: Committee-based threshold classification algorithm with reinforcement active learning. In: *2024 IEEE 2nd International Conference on Control, Electronics and Computer Technology (ICCECT)*. pp. 63–67 (2024). <https://doi.org/10.1109/ICCECT60629.2024.10546099>
50. Zhao, L., Li, B., Jiang, J., Wei, X.: Classification committee for active deep object detection. *IEEE Transactions on Multimedia* **27**, 1277–1288 (2025). <https://doi.org/10.1109/TMM.2024.3521778>
51. Zhao, S., Chen, H., Wang, C., Liu, K.: Dban: Double bias adjustment network for domain shift defect detection in photovoltaic intelligent manufacturing. *IEEE Transactions on Automation Science and Engineering* **22**, 13411–13428 (2025). <https://doi.org/10.1109/TASE.2025.3554328>
52. Zhao, S., Chen, H., Wang, C., Zhang, Z.: Ssn: Shift suppression network for endogenous shift of photovoltaic defect detection. *IEEE Transactions on Industrial Informatics* **20**(3), 4685–4697 (2024). <https://doi.org/10.1109/TII.2023.3327572>
53. Zhao, Y., Lv, W., Xu, S., Wei, J., Wang, G., Dang, Q., Liu, Y., Chen, J.: Detrs beat yolos on real-time object detection. In: *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. pp. 16965–16974 (2024). <https://doi.org/10.1109/CVPR52733.2024.01605>