# Reliability-Aware Reconstruction of V-Shaped Surfaces with a Low-Cost Multi-Zone SPAD Sensor

Yohanssen Pratama[1]

[1] *Institute for International Strategy and Emerging Technologies, Tokyo International University, 1-13-1 Matoba-Kita, Kawagoe, 350-1197, Japan*

Abstract—Low-cost multi-zone single-photon avalanche diode (SPAD) sensors provide compact time-of-flight measurements but are limited by sparse sampling and unreliable depth estimates near geometric discontinuities. This letter presents a reliability-aware reconstruction framework for V-shaped surfaces using two complementary TMF8821 acquisition configurations. Point-wise reliability is learned from sensor confidence, transient peak amplitude, and peak sharpness, and is incorporated into a graph-based depth optimization. The reconstructed geometry is evaluated by robust two-plane fitting and a perpendicular cross-section. Experiments on 60°, 90°, and 120° targets reduce the mean V-angle error from 11.21° to 9.66° (13.8%). For the representative 90° target, the combined point-to-plane RMSE decreases from 14.56 mm to 13.65 mm.

Index Terms—Single-photon avalanche diode (SPAD), surface reconstruction, time-of-flight (ToF) sensing, reliability-aware optimization, transient measurements, V-shaped surfaces.

arXiv:2610.28258v1 [cs.CV] 20 Oct 2026

## I. INTRODUCTION

Time-of-flight (ToF) sensing is widely used for three-dimensional (3-D) perception. Single-photon avalanche diode (SPAD) sensors are attractive because of their single-photon sensitivity and high temporal resolution [1], [2]. Computational single-photon imaging has further demonstrated recovery of depth and reflectivity from sparse photon measurements by exploiting spatial and transient information [3]–[5].

Accurate reconstruction remains difficult near sharp depth transitions, where mixed returns can produce erroneous or "flying" measurements [6]. This is especially relevant for V-shaped surfaces, whose two planar faces meet at a sharp fold. Compact multi-zone dToF sensors such as the TMF8821 integrate SPAD detection, TDC circuitry, histogram processing, and distance/confidence output in a low-cost module [7]; however, their sparse spatial sampling limits direct surface recovery.

This letter proposes a reliability-aware reconstruction framework that aggregates two complementary acquisition configurations and learns point-wise reliability from confidence, transient peak amplitude, and peak sharpness. Reliability-weighted graph optimization refines the measured depth while preserving transient and local geometric consistency. The main contribution is the use of transient-derived, learnable reliability to guide geometric refinement of sparse low-cost SPAD measurements. Experiments on 60°, 90°, and 120° V-shaped targets reduce the mean angular error from 11.21° to 9.66° (13.8%).

## II. RELIABILITY-AWARE SPAD SURFACE RECONSTRUCTION

The proposed framework reconstructs V-shaped surfaces from sparse multi-zone SPAD measurements by jointly exploiting depth and transient information. Measurements acquired under two sensor configurations are first aggregated into a common point set. Transient-derived features are then used to estimate the reliability of each depth measurement. Finally, the measured depth is refined through a graph-based optimization that balances measurement fidelity, local geometric consistency, and transient peak-position consistency. The overall processing pipeline is shown in Fig. 1.

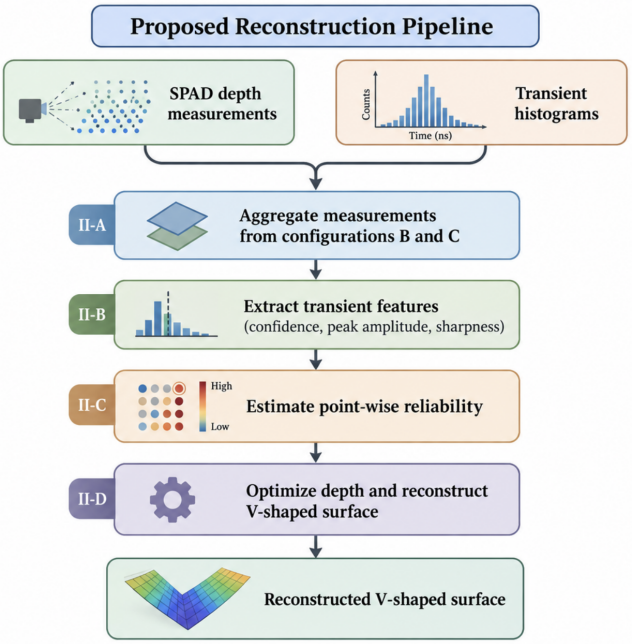


Fig. 1. Overview of the proposed reliability-aware V-shaped surface reconstruction pipeline.

### A. Multi-Configuration SPAD Acquisition

The measurement setup employs a TMF8821 multi-zone direct time-of-flight (dToF) sensor to acquire both depth and transient photon histograms from the target surface. The sensor is operated using two custom acquisition configurations, denoted as Configurations B and C, to provide complementary spatial sampling of the scene. Both configurations are defined over a 16×10 logical sampling grid and are executed sequentially using 20 measurement masks. Each acquisition frame uses one measurement per mask after a 5-ms settling interval.

Corresponding author: Y. Pratama (e-mail: ypratama@tiu.ac.jp).

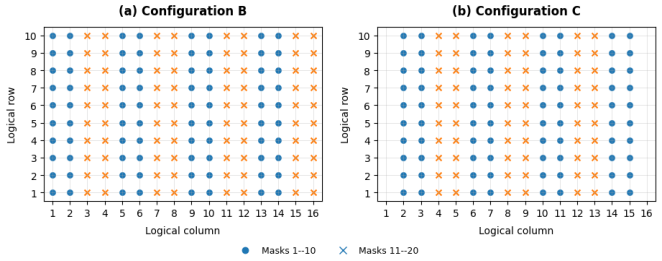


Fig. 2. Spatial sampling patterns of the custom TMF8821 configurations: (a) Configuration B and (b) horizontally shifted Configuration C.

Measurements with confidence below 75 or nonpositive range are discarded before reconstruction.

Configuration B covers the complete $16 \times 10$ grid, whereas Configuration C applies a one-column horizontal shift to provide complementary measurements under a different sampling pattern. The two configurations therefore observe the same target geometry with different spatial support. Valid measurements from both configurations are aggregated into a common point set before reliability estimation and depth optimization. The two sampling patterns are shown in Fig. 2.

Each valid sample provides range, confidence, and a temporal histogram. Before optimization, samples below the 20th confidence percentile or 15th photon-count percentile, above the 90th FWHM percentile, farther than 12 mm from the local median depth, or within the most isolated 10% of samples are removed.

After FoV calibration, each reported distance $z_i$ is embedded in the Cartesian parameterization used for reconstruction according to

$$\begin{aligned} x_i &= z_i \tan(\alpha_i), \\ y_i &= z_i \tan(\beta_i), \end{aligned} \tag{1}$$

where the horizontal and vertical viewing angles are given by

$$\begin{aligned} \alpha_i &= \left(c_i - \frac{N_c - 1}{2}\right) \frac{\Phi_x}{N_c - 1}, \\ \beta_i &= \left(r_i - \frac{N_r - 1}{2}\right) \frac{\Phi_y}{N_r - 1}. \end{aligned} \tag{2}$$

Here, $r_i$ and $c_i$ are the row and column indices, $N_r = 10$, $N_c = 16$, and $\Phi_x$, $\Phi_y$ are the calibrated fields of view. The same $41^\circ \times 52^\circ$ calibration is used for all final 3-D reconstructions and plane fitting.

## B. Transient Feature Extraction and Reliability Estimation

Each SPAD measurement provides a temporal photon histogram in addition to the estimated range. Rather than treating all depth samples equally, the proposed method derives a reliability value from three complementary measurement cues: sensor confidence, transient peak amplitude, and peak sharpness.

After background subtraction, peak amplitude is log-transformed and robustly normalized, while sharpness is defined as one minus the normalized FWHM of the dominant transient peak. The normalized feature vector for point $i$ is

$$\mathbf{f}_i = [C_i,\ P_i,\ S_i]^T, \tag{3}$$

where $C_i$, $P_i$, and $S_i$ represent confidence, peak amplitude, and peak sharpness, respectively. Measurement reliability is defined as

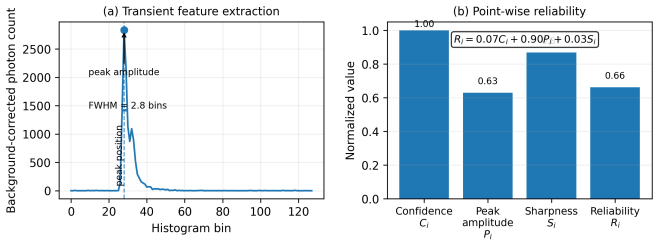


Fig. 3. Transient feature extraction and point-wise reliability: (a) representative transient histogram and (b) normalized features and learned reliability $R_i$.

$$R_i = w_C C_i + w_P P_i + w_S S_i, \tag{4}$$

subject to

$$w_C + w_P + w_S = 1, \qquad w_C, w_P, w_S \geq 0. \tag{5}$$

The weights are optimized jointly with the reconstructed depth rather than manually fixed. Fig. 3 illustrates the transient features and resulting point-wise reliability.

For the representative 90° experiment, the learned coefficients are $(w_C, w_P, w_S) = (0.069, 0.903, 0.028)$, indicating a dominant peak-amplitude contribution in this scene.

## C. Reliability-Aware Depth Optimization

Let $z_i^{\text{obs}}$ and $z_i$ denote the observed and optimized depths of point $i$, respectively. The reconstructed depth is obtained by minimizing

$$\mathcal{L} = \lambda_d \mathcal{L}_{\text{data}} + \lambda_s \mathcal{L}_{\text{smooth}} + \lambda_p \mathcal{L}_{\text{peak}} + \lambda_{wp} \mathcal{L}_{wp} + \lambda_{rm} \mathcal{L}_{rm}. \tag{6}$$

The reliability-weighted data term is

$$\mathcal{L}_{\text{data}} = \frac{1}{N} \sum_i R_i\, \rho\left(z_i - z_i^{\text{obs}}\right), \tag{7}$$

where $\rho(t) = \sqrt{t^2 + \epsilon^2}$ is the Charbonnier penalty; thus lower-reliability samples can move farther from their observations.

Spatial consistency is imposed using a $k$-nearest-neighbor graph,

$$\mathcal{L}_{\text{smooth}} = \frac{1}{|\mathcal{E}|} \sum_{(i,j) \in \mathcal{E}} g_{ij} \rho(z_i - z_j), \tag{8}$$

where $g_{ij}$ is the transient-aware graph weight. $\mathcal{L}_{\text{peak}}$ matches normalized optimized depth to normalized peak position, $\mathcal{L}_{wp}$ penalizes deviation of the learned reliability coefficients from $(0.4, 0.4, 0.2)$, and $\mathcal{L}_{rm}$ preserves their initial mean reliability.

## D. V-Shaped Surface Geometry Estimation

For quantitative evaluation, the reconstructed point cloud is separated into the two dominant planar surfaces of the V-shaped target. Candidate planes are estimated using robust fitting, with local point density and spatial connectivity used to suppress sparse outliers.

The initial plane hypotheses follow a RANSAC-style robust model-fitting strategy [8], after which density and connectivity criteria favor spatially coherent support across each V-shaped face.

Each reconstructed plane is represented as

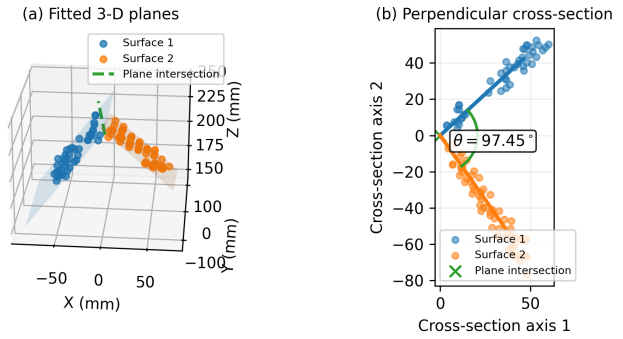


Fig. 4. V-shaped geometry estimation: (a) fitted 3-D planes and (b) perpendicular cross-section for the opening angle $\theta$.

$$ax + by + cz + d = 0, \tag{9}$$

with normal vector $\mathbf{n} = [a, b, c]^T$. The intersection direction of the two planes is

$$\mathbf{l} = \mathbf{n}_1 \times \mathbf{n}_2. \tag{10}$$

A cross-sectional plane perpendicular to $\mathbf{l}$ is then used to obtain the two surface directions. The V opening angle is computed from

$$\theta = \cos^{-1}\left(\frac{\mathbf{d}_1^T \mathbf{d}_2}{\|\mathbf{d}_1\|\|\mathbf{d}_2\|}\right), \tag{11}$$

where $\mathbf{d}_1$ and $\mathbf{d}_2$ denote the two oriented surface directions in the cross-section. The geometry is illustrated in Fig. 4.

## III. EXPERIMENTS AND RESULTS

### A. Experimental Setup

Experiments were conducted using a TMF8821 multi-zone SPAD ToF sensor. Three V-shaped targets with ground-truth opening angles of 60°, 90°, and 120° were evaluated. For each target, transient measurements were acquired using two sensor configurations and processed using identical reconstruction parameters.

The sensor field of view was calibrated to $41° \times 52°$ and kept fixed for all experiments. No ground-truth angle information was used during reconstruction or plane estimation. The setup and sensor module are shown in Fig. 5.

All targets use 500 iterations with $(\lambda_d, \lambda_s, \lambda_p, \lambda_{wp}, \lambda_{rm}) = (1.0, 0.8, 0.03, 0.02, 0.10)$ and depth/weight learning rates of 0.05/0.002; no target-specific tuning is used.

### B. V-Angle Reconstruction Accuracy

The opening angle was estimated from the fitted 3-D planes using the perpendicular cross-section of Section II-D. Table 1 summarizes the estimates and absolute errors before and after optimization.

The optimization reduces the angular error for all three targets, with the mean error decreasing from 11.21° to 9.66° (13.8%). The 120° target remains the most challenging case under sparse spatial sampling. Fig. 6 shows the corresponding perpendicular cross-sections before and after optimization.




(a) Experimental setup and tested V-shaped targets (b) TMF8821 sensor module

Fig. 5. Experimental setup: (a) TMF8821-to-target arrangement and (b) TMF8821 multi-zone dToF sensor module.

TABLE 1. V-angle reconstruction accuracy before and after optimization.

| GT | Before optimization | | After optimization | |
|---|---|---|---|---|
| | Est. | Error | Est. | Error |
| 60° | 66.42° | 6.42° | 65.21° | 5.21° |
| 90° | 98.91° | 8.91° | 97.45° | 7.45° |
| 120° | 138.29° | 18.29° | 136.31° | 16.31° |
| Mean | – | **11.21°** | – | **9.66°** |
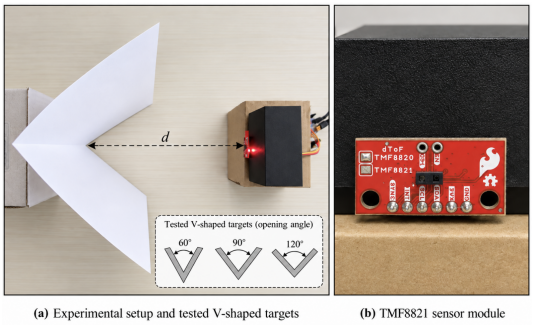
### C. Geometric Reconstruction Quality

The 90° target is used as a representative example of local planar conformity. Fig. 7 compares the calibrated 3-D reconstruction and fitted planes before and after optimization.

Geometric error is quantified by the point-to-plane RMSE,

$$\mathrm{RMSE}_{\mathrm{plane}} = \sqrt{\frac{1}{N}\sum_{i=1}^{N} d_i^2}, \tag{12}$$

where $d_i$ is the perpendicular point-to-plane distance; multi-peak boundary measurements are excluded. The combined RMSE decreases from 14.56 mm to 13.65 mm (6.24%). Surface 1 decreases from 19.06 mm to 18.76 mm, while Surface 2 decreases from 8.95 mm to 6.48 mm, indicating improved local planar conformity.

### D. Effect of Multi-Configuration Acquisition

To isolate the contribution of complementary spatial sampling, the 90° target is additionally evaluated using Configuration B alone, the aggregated B+C measurements before optimization, and the aggregated B+C measurements after the proposed optimization. As shown in Fig. 8, this comparison separates the effect of increased spatial support from the subsequent reliability-aware depth refinement.

Table 2 summarizes the same 90° ablation numerically. Using the second acquisition configuration increases the retained spatial support from 93 to 176 points and reduces the angular error from 12.32° to 8.91°. The proposed reliability-aware optimization further reduces the error to 7.45°.

## IV. CONCLUSION

A reliability-aware framework for V-shaped surface reconstruction using a low-cost multi-zone SPAD sensor was presented. Across 60°, 90°, and 120° targets, the mean V-angle error decreased from 11.21° to 9.66° (13.8%); for the representative 90° target, point-to-plane RMSE decreased from 14.56 mm to 13.65 mm. The results demonstrate the benefit of transient-derived reliability for sparse SPAD reconstruction.

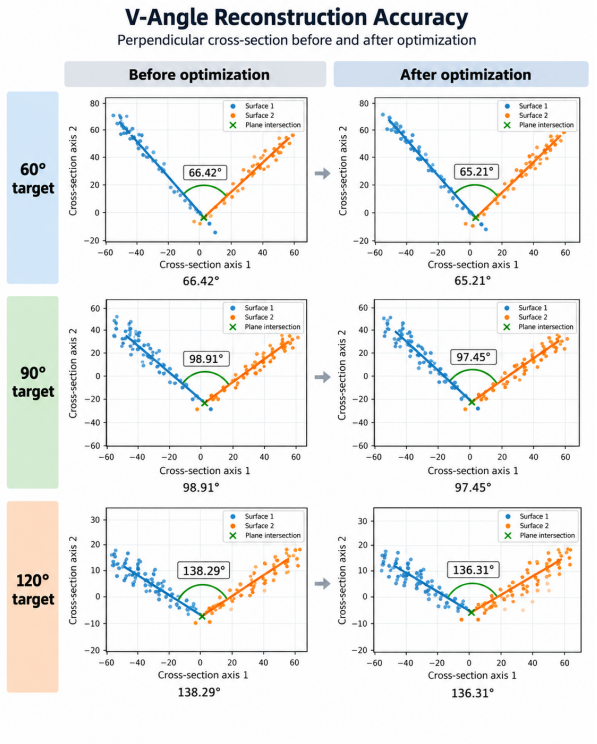


Fig. 6. V-angle reconstruction before and after optimization for 60°, 90°, and 120° targets.

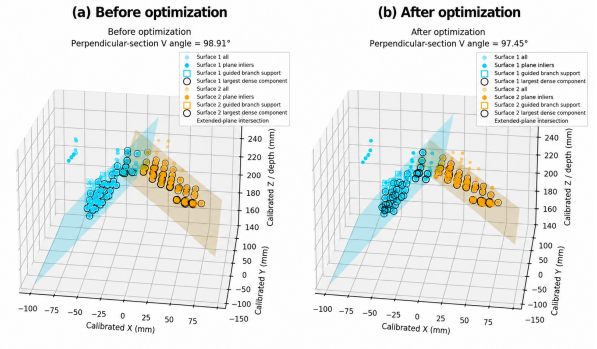


Fig. 7. Geometric reconstruction quality for the 90° V-shaped target before and after reliability-aware optimization.

## REFERENCES


[1] C. Bruschini, H. Homulle, I. M. Antolovic, S. Burri, and E. Charbon, "Single-photon avalanche diode imagers in biophotonics: Review and outlook," *Light: Science & Applications*, vol. 8, p. 87, 2019.

[2] S. Scholes, G. Mora-Martín, F. Zhu, I. Gyongy, P. Soan, and J. Leach, "Fundamental limits to depth imaging with single-photon detector array sensors," *Scientific Reports*, vol. 13, p. 176, 2023.

[3] A. Kirmani, D. Venkatraman, D. Shin, A. Colaco, F. N. C. Wong, J. H. Shapiro, and V. K. Goyal, "First-photon imaging," *Science*, vol. 343, no. 6166, pp. 58–61, 2014.

[4] D. Shin, F. Xu, D. Venkatraman, R. Lussana, F. Villa, F. Zappa, V. K. Goyal, F. N. C. Wong, and J. H. Shapiro, "Photon-efficient imaging with a single-photon camera," *Nature Communications*, vol. 7, p. 12046, 2016.

[5] Y. Altmann, X. Ren, A. McCarthy, G. S. Buller, and S. McLaughlin, "Robust bayesian target detection algorithm for depth imaging from sparse single-photon data," *IEEE Transactions on Computational Imaging*, vol. 2, no. 4, pp. 456–467, 2016.

[6] I. Chugunov, S.-H. Baek, Q. Fu, W. Heidrich, and F. Heide, "Mask-tof: Learning microlens masks for flying pixel correction in time-of-flight imaging," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021, pp. 9116–9126.

[7] ams OSRAM, *TMF8820/21/28 Multizone Time-of-Flight Sensor*, ams OSRAM, product datasheet.

[8] M. A. Fischler and R. C. Bolles, "Random sample consensus: A paradigm for model fitting with applications to image analysis and automated cartography," *Communications of the ACM*, vol. 24, no. 6, pp. 381–395, 1981.


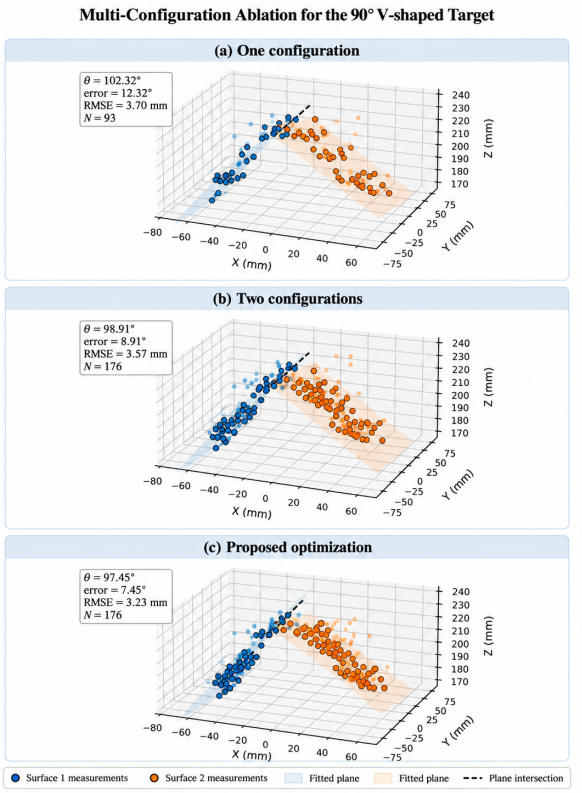


Fig. 8. Ablation on the 90° target: (a) one configuration before optimization, (b) two aggregated configurations before optimization, and (c) two configurations after the proposed reliability-aware optimization.

TABLE 2. Multi-configuration ablation on the 90° target.

| Method | Points | Est. angle | Error |
|---|---|---|---|
| Config. B only | 93 | 102.32° | 12.32° |
| B+C raw | 176 | 98.91° | 8.91° |
| B+C proposed | 176 | 97.45° | 7.45° |