



Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China


Tel.: +86-755 23225153, Fax: +86-755 29651921

Test Verification of Conformity

Reference Number: **E160601036A5**

Applicant: **SHENZHEN CYX TECHNOLOGY CO.,LTD**
2F, 6 buildings, GuangXi Industrial Zone, Industrial West Road,
LongSheng community, LongHua New District, ShenZhen.

Description of Product:

Product Name : **OTT TV BOX**
Manufacturer : Same as applicant
Model No. : **A95X**
Brand Name : **CYX;NEXBOX**
Additional Model No. : **A1; A2;A3;A5;A6;A85;A95; A95C; A95X; A95H;A95K;D5; D6; D8; D9;D32; D35;
D36; D37; D51; D52; D53; D55;D56;D57;Y1; Y2;Y3;Y5;Y6;Y7;Y8; Y9; Y21;
Y22;Y23;Y25; Y26;Y27;Y28.**
Additional Brand Name : **N/A**
Ratings : **Input: 5V , 2000mA (powered by external AC/DC adapter);**
Date of tests: **10 June 2016 to 08 July 2016**

Applicable Standard(s) with amendments:

EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013

IEC 60950-1:2005 + A1:2009 + A2:2013

And, in accordance with the following directives:

2006/95/EC Electromagnetic Compatibility

On the basis of the referenced test report(s), the sample(s) of the below product has been found to comply with the relevant harmonized standard(s) to the directive(s) listed on this verification at the time the tests were carried out. The manufacturer may indicate compliance to only the said directives by signing a DoC himself and may affix the CE marking to products identical to the tested sample(s) if the product complies with all CE marking directives that has the product in their scope. In addition, the manufacturer shall file and keep the documentation according to the rules of the applicable directive(s) and shall consider changes of the standards as they may occur. Additional requirements, additional directives and local laws may be applicable.



Signature
Name : SAM LIU
Position : Safety Manager

TEST REPORT
IEC 60950-1
Information technology equipment – Safety –
Part 1: General requirements

Report Number..... : E160601036A5

Date of issue..... : March 14, 2016

Total number of pages..... 68 pages

Applicant's name..... : SHENZHEN CYX TECHNOLOGY CO.,LTD

Address..... : 2F, 6 buildings, GuangXi Industrial Zone, Industrial West Road,
LongSheng community, LongHua New District, ShenZhen

Test specification:

Standard..... : EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013
IEC 60950-1:2005 + A1:2009 + A2:2013

Test procedure..... : R and TTE article 3.1a

Non-standard test method..... : N/A

Test Report Form No..... : IEC60950_1F

Test Report Form(s) Originator..... : SGS Fimko Ltd

Master TRF..... : Dated 2014-02

Copyright © 2014 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.


If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.


This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description..... :	OTT TV BOX
Trade Mark..... :	CYX;NEXBOX
Manufacturer..... :	SHENZHEN CYX TECHNOLOGY CO.,LTD 2F, 6 buildings, GuangXi Industrial Zone, Industrial West Road, LongSheng community, LongHua New District, ShenZhen
Model/Type reference..... :	A95X A1; A2;A3;A5;A6;A85;A95; A95C; A95X; A95H;A95K;D5; D6; D8; D9;D32; D35; D36; D37; D51; D52; D53; D55;D56;D57;Y1; Y2;Y3;Y5;Y6;Y7;Y8; Y9; Y21; Y22;Y23;Y25; Y26;Y27;Y28.
Ratings..... :	Input: 5V  , 2000mA (powered by external AC/DC adapter); Class III apparatus.

Testing procedure and testing location:		
<input checked="" type="checkbox"/>	Testing Laboratory:	Electrical Uniform Test Service Co., Ltd.
Testing location/ address.....:		F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China
<input type="checkbox"/>	Associated CB Testing Laboratory:	
Testing location/ address.....:		
Tested by (name + signature).....:		Signature on file
Approved by (name + signature)..... :		
<input type="checkbox"/>	Testing procedure: TMP/CTF Stage 1:	
Testing location/ address.....:		
Tested by (name + signature).....:		
Approved by (name + signature)..... :		
<input type="checkbox"/>	Testing procedure: WMT/CTF Stage 2:	
Testing location/ address.....:		
Tested by (name + signature).....:		
Witnessed by (name + signature).....:		
Approved by (name + signature)..... :		
<input type="checkbox"/>	Testing procedure: SMT/CTF Stage 3 or 4:	
Testing location/ address.....:		
Tested by (name + signature).....:		
Witnessed by (name + signature).....:		
Approved by (name + signature)..... :		
Supervised by (name + signature)..... :		

List of Attachments (including a total number of pages in each attachment):

- Main test report (42 Pages)
- Appendix 1 (22 pages)_EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES for EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 + A2:2013
- Appendix 2 (4 pages)_ Product photos

Summary of testing:

The sample(s) tested complies with the requirements of EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011+ A2:2013 and IEC 60950-1:2005 + A1:2009 + A2:2013.

- The external earphone will not be sold single in market, no need to be evaluated according clause Zx.4

Tests performed (name of test and test clause):

- 1.6.2 Input test
- 1.7.11 Marking durability test
- 2.1.1.5 Energy hazards test
- 2.2.2 Voltage under normal conditions test
- 2.2.3 Voltage under fault conditions test
- 2.5 Limited power source
- 4.5.2 Normal operating test
- 5.3 Abnormal operating and fault conditions test
- Annex Z.x Sound pressure Level test

Testing location:

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area,
Zhoushi Rd, Baoan, Shenzhen, China

Summary of compliance with National Differences

IEC standard has been compared with the EN standard, EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES of all CENELEC members have been considered.

- ☒ The product fulfils the requirements of EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.



Marking plate of TV Box

Note:

- The above markings are the minimum requirements required by the safety standard. For the final production samples, the additional markings which do not give rise to misunderstanding may be added.
- Size of CE mark must be in correct ratio and $\geq 5\text{mm}$ in height, and size of WEEE mark must be in correct ratio and $\geq 7\text{mm}$ in height.

Test item particulars..... :	
Equipment mobility.....:	<input checked="" type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> stationary <input type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in
Connection to the mains.....:	<input type="checkbox"/> pluggable equipment <input type="checkbox"/> type A <input type="checkbox"/> type B <input type="checkbox"/> permanent connection <input type="checkbox"/> detachable power supply cord <input type="checkbox"/> non-detachable power supply cord <input checked="" type="checkbox"/> not directly connected to the mains
Operating condition.....:	<input checked="" type="checkbox"/> continuous <input type="checkbox"/> rated operating / resting time:
Access location	<input checked="" type="checkbox"/> operator accessible <input type="checkbox"/> restricted access location
Over voltage category (OVC)	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input checked="" type="checkbox"/> other: Not directly connected to the mains
Mains supply tolerance (%) or absolute mains supply values	Not directly connected to the mains
Tested for IT power systems	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
IT testing, phase-phase voltage (V)	N/A
Class of equipment	<input type="checkbox"/> Class I <input type="checkbox"/> Class II <input checked="" type="checkbox"/> Class III <input type="checkbox"/> Not classified
Considered current rating of protective device as part of the building installation (A)	N/A
Pollution degree (PD)	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
IP protection class	IPX0
Altitude during operation (m)	< 2000 m
Altitude of test laboratory (m)	< 2000 m
Mass of equipment (kg)	Approx.: 0.580 kg
Possible test case verdicts:	
- test case does not apply to the test object..... : N/A	
- test object does meet the requirement..... : P (Pass)	
- test object does not meet the requirement..... : F (Fail)	
Testing..... :	
Date of receipt of test item..... : 09 June 2016	
Date (s) of performance of tests..... : 10 June 2016 to 08 July 2016	

General remarks:

"(See Enclosure #)" refers to additional information appended to the report.

"(See appended table)" refers to a table appended to the report.

Throughout this report a ☐ comma / ☒ point is used as the decimal separator.

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

The clause which indicated with * is the subcontract test item. (if there is subcontracting test).

Manufacturer's Declaration per sub-clause 4.2.5 of IEC60950-1:

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided..... :

☐ **Yes**
☒ **Not applicable**
When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies)..... : Name: SHENZHEN CYX TECHNOLOGY CO.,LTD
Address: 2F, 6 buildings, GuangXi Industrial Zone, Industrial West Road, LongSheng community, LongHua New District, ShenZhen

General product information:

The equipment covered in this report is TV Box powered by approved external AC/DC adapter. The external AC/DC adapter complied with requirement of EN 60950-1 Cl. 2.5 Limited Power Source.

All the models listed in this report page 2 are identical with each other except model no.

Abbreviations used in the report:

- normal conditions	N.C.	- single fault conditions	S.F.C
- functional insulation	OP	- basic insulation	BI
- double insulation	DI	- supplementary insulation	SI
- between parts of opposite polarity	BOP	- reinforced insulation	RI

Indicate used abbreviations (if any)

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1	GENERAL		P
1.5	Components		P
1.5.1	General		P
	Comply with IEC 60950-1 or relevant component standard	(see appended tables 1.5.1)	P
1.5.2	Evaluation and testing of components	Components which are certified to IEC and/or national standards of European are used correctly within their ratings	P
1.5.3	Thermal controls	No such device	N/A
1.5.4	Transformers	No such transformers within equipment, All the evaluation related to the transformer is done in the adaptor which is controlled as critical component in appended table 1.5.1.	N/A
1.5.5	Interconnecting cables	No such cables	N/A
1.5.6	Capacitors bridging insulation	No such capacitors used in the equipment	N/A
1.5.7	Resistors bridging insulation	No such resistors used in the equipment	N/A
1.5.7.1	Resistors bridging functional, basic or supplementary insulation		N/A
1.5.7.2	Resistors bridging double or reinforced insulation between a.c. mains and other circuits		N/A
1.5.7.3	Resistors bridging double or reinforced insulation between a.c. mains and antenna or coaxial cable		N/A
1.5.8	Components in equipment for IT power systems	No such equipment connected to IT power systems	N/A
1.5.9	Surge suppressors	No surge suppressors used in the equipment	N/A
1.5.9.1	General		N/A
1.5.9.2	Protection of VDRs		N/A
1.5.9.3	Bridging of functional insulation by a VDR		N/A
1.5.9.4	Bridging of basic insulation by a VDR		N/A
1.5.9.5	Bridging of supplementary, double or reinforced insulation by a VDR		N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.6	Power interface		P
1.6.1	AC power distribution systems	Not connected to AC power distribution systems, only DC power from external AC/DC adapter	N/A
1.6.2	Input current	Input test applied for verification of AC/DC adapter application compliance (see appended table 1.6.2)	P
1.6.3	Voltage limit of hand-held equipment	Not hand-held equipment	N/A
1.6.4	Neutral conductor	No such Neutral conductor used	N/A

1.7	Marking and instructions		P
1.7.1	Power rating and identification markings	No rating marking for the equipment due to not directly connected to the mains supply	P
1.7.1.1	Power rating marking	See above	N/A
	Multiple mains supply connections.....:		N/A
	Rated voltage(s) or voltage range(s) (V)		N/A
	Symbol for nature of supply, for d.c. only.....:		N/A
	Rated frequency or rated frequency range (Hz):		N/A
	Rated current (mA or A)		N/A
1.7.1.2	Identification markings		P
	Manufacturer's name or trade-mark or identification mark	See page 2 for details	P
	Model identification or type reference	See page 2 for details	P
	Symbol for Class II equipment only	Only Class III equipment	N/A
	Other markings and symbols	Additional symbol shall not give misunderstanding	P
1.7.1.3	Use of graphical symbols		N/A
1.7.2	Safety instructions and marking	Mentioned in user's manual	P
1.7.2.1	General	Mentioned in user manual	P
1.7.2.2	Disconnect devices	Not directly connected to the mains	N/A
1.7.2.3	Overcurrent protective device	No such devices used in the equipment	N/A
1.7.2.4	IT power distribution systems	No such IT power systems	N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.5	Operator access with a tool	No such tools	N/A
1.7.2.6	Ozone	No Ozone	N/A
1.7.3	Short duty cycles	The equipment designed for continual operation	N/A
1.7.4	Supply voltage adjustment	No such devices used in the equipment	N/A
	Methods and means of adjustment; reference to installation instructions		N/A
1.7.5	Power outlets on the equipment	No such power outlets used	N/A
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference)	No such fuse used in the equipment	N/A
1.7.7	Wiring terminals	No such terminals	N/A
1.7.7.1	Protective earthing and bonding terminals		N/A
1.7.7.2	Terminals for a.c. mains supply conductors		N/A
1.7.7.3	Terminals for d.c. mains supply conductors		N/A
1.7.8	Controls and indicators	Only used for function display	P
1.7.8.1	Identification, location and marking	No controls and switches affecting safety	P
1.7.8.2	Colours	Colour is only used for functional indicator	P
1.7.8.3	Symbols according to IEC 60417	See the above	P
1.7.8.4	Markings using figures	No such figures used	N/A
1.7.9	Isolation of multiple power sources	No such multiple power sources	N/A
1.7.10	Thermostats and other regulating devices	No such device used in the equipment	N/A
1.7.11	Durability	After rubbing test by water and petroleum spirit, the marking still legible; it is not easily possible to remove the marking plate and show no curling	P
1.7.12	Removable parts	No such parts	N/A
1.7.13	Replaceable batteries	No such batteries	N/A
	Language(s)	English	—
1.7.14	Equipment for restricted access locations.....	No such equipment	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2	PROTECTION FROM HAZARDS		P
2.1	Protection from electric shock and energy hazards		P
2.1.1	Protection in operator access areas	SELV circuit powered from output of approved AC/DC adapter	P
2.1.1.1	Access to energized parts	Class III equipment, no hazards can be touched.	N/A
	Test by inspection	See above	N/A
	Test with test finger (Figure 2A)	See above	N/A
	Test with test pin (Figure 2B)	See above	N/A
	Test with test probe (Figure 2C)	No TNV circuit within the equipment	N/A
2.1.1.2	Battery compartments	No battery compartment within the equipment	N/A
2.1.1.3	Access to ELV wiring	No ELV wiring used within the equipment	N/A
	Working voltage (V_{peak} or V_{rms}); minimum distance through insulation (mm)		—
2.1.1.4	Access to hazardous voltage circuit wiring	No such wiring	N/A
2.1.1.5	Energy hazards	No energy hazards. Approved adapter used, and battery package has PTC to limit the output power under energy hazards level. (See appended table 2.1.1.5)	P
2.1.1.6	Manual controls	No such controls connected to hazards	N/A
2.1.1.7	Discharge of capacitors in equipment	No such capacitors used	N/A
	Measured voltage (V); time-constant (s).....		—
2.1.1.8	Energy hazards – d.c. mains supply	Not such mains supply	N/A
	a) Capacitor connected to the d.c. mains supply ...:		N/A
	b) Internal battery connected to the d.c. mains supply :		N/A
2.1.1.9	Audio amplifiers	No such parts	N/A
2.1.2	Protection in service access areas	No such areas	N/A
2.1.3	Protection in restricted access locations	No such locations	N/A
2.2	SELV circuits		P

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.2.1	General requirements	Supplied by SELV circuit (See appended table 2.2)	P
2.2.2	Voltages under normal conditions (V)	All accessible voltages are less than 42.4 Vp or 60 V dc and are classified as SELV	P
2.2.3	Voltages under fault conditions (V)	Under fault conditions voltages never exceed 71V peak and 120Vdc and do not exceed 42.4V peak or 60V dc for more than 0.2 sec.	P
2.2.4	Connection of SELV circuits to other circuits	SELV to SELV only	P

2.3	TNV circuits		N/A
2.3.1	Limits	No TNV circuit within the EUT	N/A
	Type of TNV circuits.....		—
2.3.2	Separation from other circuits and from accessible parts		N/A
2.3.2.1	General requirements		N/A
2.3.2.2	Protection by basic insulation		N/A
2.3.2.3	Protection by earthing		N/A
2.3.2.4	Protection by other constructions		N/A
2.3.3	Separation from hazardous voltages		N/A
	Insulation employed.....		—
2.3.4	Connection of TNV circuits to other circuits		N/A
	Insulation employed.....		—
2.3.5	Test for operating voltages generated externally		N/A

2.4	Limited current circuits		N/A
2.4.1	General requirements	No such circuits	N/A
2.4.2	Limit values	See clause 2.4.1	N/A
	Frequency (Hz).....		—
	Measured current (mA).....		—
	Measured voltage (V).....		—
	Measured circuit capacitance (nF or μ F).....		—
2.4.3	Connection of limited current circuits to other circuits	See clause 2.4.1	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.5	Limited power sources		P
	a) Inherently limited output	No such inherently limit outout used	N/A
	b) Impedance limited output	Approved PTC used in battery pack	P
	c) Regulating network or IC current limiter, limits output under normal operating and single fault condition	No such regulating network limit output used	N/A
	Use of integrated circuit (IC) current limiters	No such component used	N/A
	d) Overcurrent protective device limited output	No such device used	N/A
	Max. output voltage (V), max. output current (A), max. apparent power (VA).....:	(See appended table 2.5)	—
	Current rating of overcurrent protective device (A) ..:		—

2.6	Provisions for earthing and bonding		N/A
2.6.1	Protective earthing	Class III type EUT	N/A
2.6.2	Functional earthing	See clause 2.6.1	N/A
	Use of symbol for functional earthing	See clause 2.6.1	N/A
2.6.3	Protective earthing and protective bonding conductors		N/A
2.6.3.1	General		N/A
2.6.3.2	Size of protective earthing conductors		—
	Rated current (A), cross-sectional area (mm ²), AWG.....:		N/A
2.6.3.3	Size of protective bonding conductors		—
	Rated current (A), cross-sectional area (mm ²), AWG.....:		—
	Protective current rating (A), cross-sectional area (mm ²), AWG.....:		—
2.6.3.4	Resistance of earthing conductors and their terminations; resistance (Ω), voltage drop (V), test current (A), duration (min).....:		N/A
2.6.3.5	Colour of insulation.....:		N/A
2.6.4	Terminals	See clause 2.6.1	N/A
2.6.4.1	General		N/A
2.6.4.2	Protective earthing and bonding terminals		N/A
	Rated current (A), type, nominal thread diameter (mm).....:		—

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors		N/A
2.6.5	Integrity of protective earthing	See clause 2.6.1	N/A
2.6.5.1	Interconnection of equipment		N/A
2.6.5.2	Components in protective earthing conductors and protective bonding conductors		N/A
2.6.5.3	Disconnection of protective earth		N/A
2.6.5.4	Parts that can be removed by an operator		N/A
2.6.5.5	Parts removed during servicing		N/A
2.6.5.6	Corrosion resistance		N/A
2.6.5.7	Screws for protective bonding		N/A
2.6.5.8	Reliance on telecommunication network or cable distribution system		N/A

2.7	Overcurrent and earth fault protection in primary circuits		N/A
2.7.1	Basic requirements	Class III type EUT	N/A
	Instructions when protection relies on building installation		N/A
2.7.2	Faults not simulated in 5.3.7		N/A
2.7.3	Short-circuit backup protection		N/A
2.7.4	Number and location of protective devices		N/A
2.7.5	Protection by several devices		N/A
2.7.6	Warning to service personnel.....		N/A

2.8	Safety interlocks		N/A
2.8.1	General principles	No safety interlocks in EUT	N/A
2.8.2	Protection requirements		N/A
2.8.3	Inadvertent reactivation		N/A
2.8.4	Fail-safe operation		N/A
	Protection against extreme hazard		N/A
2.8.5	Moving parts		N/A
2.8.6	Overriding		N/A
2.8.7	Switches, relays and their related circuits		N/A
2.8.7.1	Separation distances for contact gaps and their related circuits (mm)		N/A
2.8.7.2	Overload test		N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.8.7.3	Endurance test		N/A
2.8.7.4	Electric strength test		N/A
2.8.8	Mechanical actuators		N/A

2.9	Electrical insulation		P
2.9.1	Properties of insulating materials	No natural rubber, hygroscopic materials or asbestos are used in the EUT	P
2.9.2	Humidity conditioning	See below	N/A
	Relative humidity (%), temperature (°C) :	See below	—
2.9.3	Grade of insulation	Functional insulation only, see clause 5.3.4	P
2.9.4	Separation from hazardous voltages		N/A
	Method(s) used :		—

2.10	Clearances, creepage distances and distances through insulation		N/A
2.10.1	General	Supplied by SELV, only requirements of functional insulation evaluated	N/A
2.10.1.1	Frequency :		N/A
2.10.1.2	Pollution degrees :	Pollution Degree 2	N/A
2.10.1.3	Reduced values for functional insulation		N/A
2.10.1.4	Intervening unconnected conductive parts		N/A
2.10.1.5	Insulation with varying dimensions		N/A
2.10.1.6	Special separation requirements		N/A
2.10.1.7	Insulation in circuits generating starting pulses		N/A
2.10.2	Determination of working voltage	See clause 2.10.1	N/A
2.10.2.1	General		N/A
2.10.2.2	RMS working voltage		N/A
2.10.2.3	Peak working voltage		N/A
2.10.3	Clearances	See clause 2.10.1	N/A
2.10.3.1	General		N/A
2.10.3.2	Mains transient voltages		N/A
	a) AC mains supply :		N/A
	b) Earthed d.c. mains supplies :		N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	c) Unearthed d.c. mains supplies		N/A
	d) Battery operation		N/A
2.10.3.3	Clearances in primary circuits		N/A
2.10.3.4	Clearances in secondary circuits		N/A
2.10.3.5	Clearances in circuits having starting pulses		N/A
2.10.3.6	Transients from a.c. mains supply		N/A
2.10.3.7	Transients from d.c. mains supply		N/A
2.10.3.8	Transients from telecommunication networks and cable distribution systems		N/A
2.10.3.9	Measurement of transient voltage levels		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network :		N/A
2.10.4	Creepage distances	See clause 2.10.1	N/A
2.10.4.1	General		N/A
2.10.4.2	Material group and comparative tracking index		N/A
	CTI tests.....		—
2.10.4.3	Minimum creepage distances		N/A
2.10.5	Solid insulation	See clause 2.10.1	N/A
2.10.5.1	General		N/A
2.10.5.2	Distances through insulation		N/A
2.10.5.3	Insulating compound as solid insulation		N/A
2.10.5.4	Semiconductor devices		N/A
2.10.5.5.	Cemented joints		N/A
2.10.5.6	Thin sheet material – General		N/A
2.10.5.7	Separable thin sheet material		N/A
	Number of layers (pcs).....		—
2.10.5.8	Non-separable thin sheet material		N/A
2.10.5.9	Thin sheet material – standard test procedure		N/A
	Electric strength test		—
2.10.5.10	Thin sheet material – alternative test procedure		N/A
	Electric strength test		—
2.10.5.11	Insulation in wound components		N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.10.5.12	Wire in wound components		N/A
	Working voltage		N/A
	a) Basic insulation not under stress		N/A
	b) Basic, supplementary, reinforced insulation		N/A
	c) Compliance with Annex U		N/A
	Two wires in contact inside wound component; angle between 45° and 90°		N/A
2.10.5.13	Wire with solvent-based enamel in wound components		N/A
	Electric strength test		—
	Routine test		N/A
2.10.5.14	Additional insulation in wound components		N/A
	Working voltage		N/A
	- Basic insulation not under stress		N/A
	- Supplementary, reinforced insulation		N/A
2.10.6	Construction of printed boards	See clause 2.10.1	N/A
2.10.6.1	Uncoated printed boards		N/A
2.10.6.2	Coated printed boards		N/A
2.10.6.3	Insulation between conductors on the same inner surface of a printed board		N/A
2.10.6.4	Insulation between conductors on different layers of a printed board		N/A
	Distance through insulation		N/A
	Number of insulation layers (pcs).....		N/A
2.10.7	Component external terminations	See clause 2.10.1	N/A
2.10.8	Tests on coated printed boards and coated components	See clause 2.10.1	N/A
2.10.8.1	Sample preparation and preliminary inspection		N/A
2.10.8.2	Thermal conditioning		N/A
2.10.8.3	Electric strength test		N/A
2.10.8.4	Abrasion resistance test		N/A
2.10.9	Thermal cycling	See clause 2.10.1	N/A
2.10.10	Test for Pollution Degree 1 environment and insulating compound	See clause 2.10.1	N/A
2.10.11	Tests for semiconductor devices and cemented joints	See clause 2.10.1	N/A
2.10.12	Enclosed and sealed parts	See clause 2.10.1	N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

3	WIRING, CONNECTIONS AND SUPPLY		P
3.1	General		P
3.1.1	Current rating and overcurrent protection	Internal wires are adequate for the current carried	P
3.1.2	Protection against mechanical damage	Wireway is smooth and free from sharp edges	P
3.1.3	Securing of internal wiring	Internal wiring are routed or secured adequately	P
3.1.4	Insulation of conductors		N/A
3.1.5	Beads and ceramic insulators	No such insulators	N/A
3.1.6	Screws for electrical contact pressure	No such screws used	N/A
3.1.7	Insulating materials in electrical connections	No such material in electrical connections	N/A
3.1.8	Self-tapping and spaced thread screws	No such screws used	N/A
3.1.9	Termination of conductors		N/A
	10 N pull test		N/A
3.1.10	Sleeving on wiring		N/A

3.2	Connection to a mains supply		N/A
3.2.1	Means of connection	Not directly connected to the mains for the equipment	N/A
3.2.1.1	Connection to an a.c. mains supply	See above	N/A
3.2.1.2	Connection to a d.c. mains supply		N/A
3.2.2	Multiple supply connections	Single supply connection	N/A
3.2.3	Permanently connected equipment	No such equipment	N/A
	Number of conductors, diameter of cable and conduits (mm)		—
3.2.4	Appliance inlets	No such inlet used	N/A
3.2.5	Power supply cords	No such cord provided	N/A
3.2.5.1	AC power supply cords		N/A
	Type		—
	Rated current (A), cross-sectional area (mm ²), AWG		—
3.2.5.2	DC power supply cords		N/A
3.2.6	Cord anchorages and strain relief	No such cord anchorages used	N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Mass of equipment (kg), pull (N)		—
	Longitudinal displacement (mm)		—
3.2.7	Protection against mechanical damage	No power cord used	N/A
3.2.8	Cord guards	No such cord guards	N/A
	Diameter or minor dimension D (mm); test mass (g)		—
	Radius of curvature of cord (mm)..... :		—
3.2.9	Supply wiring space	No such space inside the equipment	N/A

3.3	Wiring terminals for connection of external conductors		N/A
3.3.1	Wiring terminals	No such terminal used in the equipment	N/A
3.3.2	Connection of non-detachable power supply cords	See the clause 3.3.1	N/A
3.3.3	Screw terminals	See the clause 3.3.1	N/A
3.3.4	Conductor sizes to be connected	See the clause 3.3.1	N/A
	Rated current (A), cord/cable type, cross-sectional area (mm ²)..... :		—
3.3.5	Wiring terminal sizes	See the clause 3.3.1	N/A
	Rated current (A), type, nominal thread diameter (mm)		—
3.3.6	Wiring terminal design	See the clause 3.3.1	N/A
3.3.7	Grouping of wiring terminals	See the clause 3.3.1	N/A
3.3.8	Stranded wire	See the clause 3.3.1	N/A

3.4	Disconnection from the mains supply		N/A
3.4.1	General requirement	Not directly connected to the mains	N/A
3.4.2	Disconnect devices	See above	N/A
3.4.3	Permanently connected equipment	No such equipment	N/A
3.4.4	Parts which remain energized	No such parts	N/A
3.4.5	Switches in flexible cords	No such switches used	N/A
3.4.6	Number of poles - single-phase and d.c. equipment	See clause 3.4.1	N/A
3.4.7	Number of poles - three-phase equipment	See clause 3.4.1	N/A
3.4.8	Switches as disconnect devices	See clause 3.4.2	N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.4.9	Plugs as disconnect devices	See clause 3.4.2	N/A
3.4.10	Interconnected equipment	No such interconnected equipment	N/A
3.4.11	Multiple power sources	Single power sources	N/A

3.5	Interconnection of equipment		P
3.5.1	General requirements	See the below	P
3.5.2	Types of interconnection circuits	SELV circuits	P
3.5.3	ELV circuits as interconnection circuits	No ELV circuits	N/A
3.5.4	Data ports for additional equipment	Input power terminal is only used for data transmission, No capability for load.	P

4	PHYSICAL REQUIREMENTS		P
4.1	Stability		N/A
	Angle of 10°	< 7kg, No need to be considered	N/A
	Test force (N)		N/A

4.2	Mechanical strength		N/A
4.2.1	General	Class III equipment, SELV circuit only	N/A
	Rack-mounted equipment.		N/A
4.2.2	Steady force test, 10 N	See clause 4.2.1	N/A
4.2.3	Steady force test, 30 N	See clause 4.2.1	N/A
4.2.4	Steady force test, 250 N	See clause 4.2.1	N/A
4.2.5	Impact test	See clause 4.2.1	N/A
	Fall test		N/A
	Swing test		N/A
4.2.6	Drop test; height (mm)	See clause 4.2.1	N/A
4.2.7	Stress relief test	See clause 4.2.1	N/A
4.2.8	Cathode ray tubes	No such tubes within the equipment	N/A
	Picture tube separately certified		N/A
4.2.9	High pressure lamps	No high pressure lamps used within the equipment	N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.2.10	Wall or ceiling mounted equipment; force (N)	No such equipment	N/A
--------	--	-------------------	-----

4.3	Design and construction		P
4.3.1	Edges and corners	Edges and corners are rounded and smoothed	P
4.3.2	Handles and manual controls; force (N)..... :	No such handles or manual controls.	N/A
4.3.3	Adjustable controls	No such controls.	N/A
4.3.4	Securing of parts	All parts secured properly.	P
4.3.5	Connection by plugs and sockets	No such connection	N/A
4.3.6	Direct plug-in equipment	No such equipment	N/A
	Torque		—
	Compliance with the relevant mains plug standard		N/A
4.3.7	Heating elements in earthed equipment	No such device	N/A
4.3.8	Batteries	(see appended table 4.3.8)	P
	- Overcharging of a rechargeable battery		P
	- Unintentional charging of a non-rechargeable battery	No such battery	N/A
	- Reverse charging of a rechargeable battery	Construction prevention	P
	- Excessive discharging rate for any battery		P
4.3.9	Oil and grease	No such oil and grease	N/A
4.3.10	Dust, powders, liquids and gases	No such element	N/A
4.3.11	Containers for liquids or gases	No such container	N/A
4.3.12	Flammable liquids	No such liquids	N/A
	Quantity of liquid (l)		N/A
	Flash point (°C)		N/A
4.3.13	Radiation	See the below	P
4.3.13.1	General	LED radiation only	P
4.3.13.2	Ionizing radiation	No such radiation	N/A
	Measured radiation (pA/kg)		—
	Measured high-voltage (kV)		—
	Measured focus voltage (kV)		—
	CRT markings		—
4.3.13.3	Effect of ultraviolet (UV) radiation on materials	No UV radiation within equipment	N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Part, property, retention after test, flammability classification		N/A
4.3.13.4	Human exposure to ultraviolet (UV) radiation	No such UV radiation	N/A
4.3.13.5	Lasers (including laser diodes) and LEDs	One LED used for torch, the other LEDs are used for functional indications as low power application	P
4.3.13.5.1	Lasers (including laser diodes)	No such lasers	N/A
	Laser class		—
4.3.13.5.2	Light emitting diodes (LEDs)	Torch LED is Exempt Group according to EN 62471	—
4.3.13.6	Other types		N/A
4.4	Protection against hazardous moving parts		N/A
4.4.1	General	No hazardous moving parts within the equipment	N/A
4.4.2	Protection in operator access areas	See clause 4.4.1	N/A
	Household and home/office document/media shredders		N/A
4.4.3	Protection in restricted access locations	See clause 4.4.1	N/A
4.4.4	Protection in service access areas	See clause 4.4.1	N/A
4.4.5	Protection against moving fan blades	See clause 4.4.1	N/A
4.4.5.1	General		N/A
	Not considered to cause pain or injury. a).....		N/A
	Is considered to cause pain, not injury. b)		N/A
	Considered to cause injury. c)		N/A
4.4.5.2	Protection for users		N/A
	Use of symbol or warning		N/A
4.4.5.3	Protection for service persons		N/A
	Use of symbol or warning		N/A
4.5	Thermal requirements		P
4.5.1	General	See the below	P
4.5.2	Temperature tests	See the below	P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Normal load condition per Annex L	Operated in the most unfavourable way of operation given in the operating instructions until steady	—
4.5.3	Temperature limits for materials	(see appended table 4.5)	P
4.5.4	Touch temperature limits	(see appended table 4.5)	P
4.5.5	Resistance to abnormal heat	No such parts need to consider	N/A

4.6	Openings in enclosures		N/A
4.6.1	Top and side openings	No openings	N/A
	Dimensions (mm)		—
4.6.2	Bottoms of fire enclosures	No fire enclosure required	N/A
	Construction of the bottom, dimensions (mm) ...:		—
4.6.3	Doors or covers in fire enclosures	See clause 4.6.1	N/A
4.6.4	Openings in transportable equipment	See clause 4.6.1	N/A
4.6.4.1	Constructional design measures		N/A
	Dimensions (mm)		—
4.6.4.2	Evaluation measures for larger openings		N/A
4.6.4.3	Use of metallized parts		N/A
4.6.5	Adhesives for constructional purposes	See clause 4.6.1	N/A
	Conditioning temperature (°C), time (weeks).....:		—

4.7	Resistance to fire		P
4.7.1	Reducing the risk of ignition and spread of flame	Appropriate use of materials and components and by suitable construction	P
	Method 1, selection and application of components wiring and materials	See clause 5.3.7 for simulate fault to evaluate	P
	Method 2, application of all of simulated fault condition tests		N/A
4.7.2	Conditions for a fire enclosure	See below	P
4.7.2.1	Parts requiring a fire enclosure	No need to consider the fire enclosure, see clause 4.7.2.2	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.2.2	Parts not requiring a fire enclosure	Output of AC/DC adapter and battery pack complied with LPS and Components mounted on V-1 or better PCB within the equipment	P
4.7.3	Materials	Components and materials have adequate flammability classification	P
4.7.3.1	General	Enclosure and component complied the requirements of IEC 60695 which is certified by UL (see appended table 1.5.1 for details)	P
4.7.3.2	Components and materials have adequate flammability classification	No fire enclosure required	N/A
4.7.3.3	Materials for components and other parts outside fire enclosures	Enclosure complied with HB and component mounted on V-1 PCB	P
4.7.3.4	Materials for components and other parts inside fire enclosures	See clause 4.7.2.2	N/A
4.7.3.5	Materials for air filter assemblies	No air filter assemblies	N/A
4.7.3.6	Materials used in high-voltage components	No such components	N/A

5	ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS		P
5.1	Touch current and protective conductor current		N/A
5.1.1	General	Class III equipment, only SELV circuits	N/A
5.1.2	Configuration of equipment under test (EUT)	See clause 5.1	N/A
5.1.2.1	Single connection to an a.c. mains supply		N/A
5.1.2.2	Redundant multiple connections to an a.c. mains supply		N/A
5.1.2.3	Simultaneous multiple connections to an a.c. mains supply		N/A
5.1.3	Test circuit	See clause 5.1	N/A
5.1.4	Application of measuring instrument	See clause 5.1	N/A
5.1.5	Test procedure	See clause 5.1	N/A
5.1.6	Test measurements	See clause 5.1	N/A
	Supply voltage (V)		—

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Measured touch current (mA)		—
	Max. allowed touch current (mA)		—
	Measured protective conductor current (mA)		—
	Max. allowed protective conductor current (mA)...		—
5.1.7	Equipment with touch current exceeding 3,5 mA	See clause 5.1	N/A
5.1.7.1	General		N/A
5.1.7.2	Simultaneous multiple connections to the supply		N/A
5.1.8	Touch currents to telecommunication networks and cable distribution systems and from telecommunication networks	See clause 5.1	N/A
5.1.8.1	Limitation of the touch current to a telecommunication network or to a cable distribution system		N/A
	Supply voltage (V)		—
	Measured touch current (mA)		—
	Max. allowed touch current (mA)		—
5.1.8.2	Summation of touch currents from telecommunication networks		N/A
	a) EUT with earthed telecommunication ports		N/A
	b) EUT whose telecommunication ports have no reference to protective earth		N/A

5.2	Electric strength		N/A
5.2.1	General	Functional insulation, see clause 5.3.4	N/A
5.2.2	Test procedure		N/A

5.3	Abnormal operating and fault conditions		P
5.3.1	Protection against overload and abnormal operation	(see appended table 5.3)	P
5.3.2	Motors	Considered vibration motor	P
5.3.3	Transformers	Transformer used in AC/DC adapter was separately evaluated along with the adapter (refer to table 1.5.1), No transformer used in the TV Box	P
5.3.4	Functional insulation.....	Method c)	P

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.3.5	Electromechanical components	No such components used in the equipment	N/A
5.3.6	Audio amplifiers in ITE	Max. volume	P
5.3.7	Simulation of faults	(see appended table 5.3)	P
5.3.8	Unattended equipment	Not such equipment	N/A
5.3.9	Compliance criteria for abnormal operating and fault conditions	(see appended table 5.3)	P
5.3.9.1	During the tests	(see appended table 5.3)	P
5.3.9.2	After the tests	(see appended table 5.3)	P
6	CONNECTION TO TELECOMMUNICATION NETWORKS		N/A
6.1	Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment		N/A
6.1.1	Protection from hazardous voltages		N/A
6.1.2	Separation of the telecommunication network from earth		N/A
6.1.2.1	Requirements	No such networks within the equipment	N/A
	Supply voltage (V)		—
	Current in the test circuit (mA)		—
6.1.2.2	Exclusions	See clause 6.1.2.1	N/A
6.2	Protection of equipment users from overvoltages on telecommunication networks		N/A
6.2.1	Separation requirements	No such networks within the equipment	N/A
6.2.2	Electric strength test procedure	See clause 6.2.1	N/A
6.2.2.1	Impulse test		N/A
6.2.2.2	Steady-state test		N/A
6.2.2.3	Compliance criteria		N/A
6.3	Protection of the telecommunication wiring system from overheating		N/A
	Max. output current (A)	No such networks within the equipment	—
	Current limiting method		—
7	CONNECTION TO CABLE DISTRIBUTION SYSTEMS		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
7.1	General	No such systems within the equipment	N/A
7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment	See clause 7.1	N/A
7.3	Protection of equipment users from overvoltages on the cable distribution system	See clause 7.1	N/A
7.4	Insulation between primary circuits and cable distribution systems	See clause 7.1	N/A
7.4.1	General		N/A
7.4.2	Voltage surge test		N/A
7.4.3	Impulse test		N/A

A	ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)	No need to be considered	N/A
A.1.1	Samples.....:		—
	Wall thickness (mm).....:		—
A.1.2	Conditioning of samples; temperature (°C)		N/A
A.1.3	Mounting of samples		N/A
A.1.4	Test flame (see IEC 60695-11-3)		N/A
	Flame A, B, C or D		—
A.1.5	Test procedure		N/A
A.1.6	Compliance criteria		N/A
	Sample 1 burning time (s).....:		—
	Sample 2 burning time (s).....:		—
	Sample 3 burning time (s).....:		—
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N/A
A.2.1	Samples, material.....:		—
	Wall thickness (mm).....:		—
A.2.2	Conditioning of samples; temperature (°C)		N/A
A.2.3	Mounting of samples		N/A
A.2.4	Test flame (see IEC 60695-11-4)		N/A
	Flame A, B or C		—

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
A.2.5	Test procedure		N/A
A.2.6	Compliance criteria		N/A
	Sample 1 burning time (s).....:		—
	Sample 2 burning time (s).....:		—
	Sample 3 burning time (s).....:		—
A.2.7	Alternative test acc. to IEC 60695-11-5, cl. 5 and 9		N/A
	Sample 1 burning time (s).....:		—
	Sample 2 burning time (s).....:		—
	Sample 3 burning time (s).....:		—
A.3	Hot flaming oil test (see 4.6.2)		N/A
A.3.1	Mounting of samples		N/A
A.3.2	Test procedure		N/A
A.3.3	Compliance criterion		N/A

B	ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)		P
B.1	General requirements	DC vibration motor used, minor power consumption which is not significant effect for safety	P
	Position	Located in inner PCB	—
	Manufacturer	(see appended table 1.5.1)	—
	Type	(see appended table 1.5.1)	—
	Rated values	(see appended table 1.5.1)	—
B.2	Test conditions		N/A
B.3	Maximum temperatures		N/A
B.4	Running overload test		N/A
B.5	Locked-rotor overload test		N/A
	Test duration (days)		—
	Electric strength test: test voltage (V)		—
B.6	Running overload test for d.c. motors in secondary circuits		N/A
B.6.1	General		N/A
B.6.2	Test procedure		N/A
B.6.3	Alternative test procedure		N/A
B.6.4	Electric strength test; test voltage (V)		N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.7	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
B.7.1	General		N/A
B.7.2	Test procedure		N/A
B.7.3	Alternative test procedure		N/A
B.7.4	Electric strength test; test voltage (V)		N/A
B.8	Test for motors with capacitors	(see appended table 5.3)	N/A
B.9	Test for three-phase motors	(see appended table 5.3)	N/A
B.10	Test for series motors		N/A
	Operating voltage (V)		—
C	ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)		N/A
	Position	No need to be considered	—
	Manufacturer		—
	Type		—
	Rated values		—
	Method of protection.....		—
C.1	Overload test		N/A
C.2	Insulation		N/A
	Protection from displacement of windings.....		N/A
D	ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)		N/A
D.1	Measuring instrument	No need to be considered	N/A
D.2	Alternative measuring instrument		N/A
E	ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)		N/A
F	ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10 and Annex G)		N/A
G	ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES		N/A
G.1	Clearances	No need to be considered	N/A
G.1.1	General		N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.1.2	Summary of the procedure for determining minimum clearances		N/A
G.2	Determination of mains transient voltage (V)		N/A
G.2.1	AC mains supply		N/A
G.2.2	Earthed d.c. mains supplies		N/A
G.2.3	Unearthed d.c. mains supplies		N/A
G.2.4	Battery operation		N/A
G.3	Determination of telecommunication network transient voltage (V)		N/A
G.4	Determination of required withstand voltage (V)		N/A
G.4.1	Mains transients and internal repetitive peaks		N/A
G.4.2	Transients from telecommunication networks		N/A
G.4.3	Combination of transients		N/A
G.4.4	Transients from cable distribution systems		N/A
G.5	Measurement of transient voltages (V)		N/A
	a) Transients from a mains supply		N/A
	For an a.c. mains supply		N/A
	For a d.c. mains supply		N/A
	b) Transients from a telecommunication network		N/A
G.6	Determination of minimum clearances		N/A
H	ANNEX H, IONIZING RADIATION (see 4.3.13)		N/A
J	ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)		N/A
	Metal(s) used	No need to be considered	—
K	ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.8)		N/A
K.1	Making and breaking capacity	No need to be considered	N/A
K.2	Thermostat reliability; operating voltage (V)		N/A
K.3	Thermostat endurance test; operating voltage (V)		N/A
K.4	Temperature limiter endurance; operating voltage (V)		N/A
K.5	Thermal cut-out reliability		N/A
K.6	Stability of operation		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

L	ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.2)		P
L.1	Typewriters	No such device	N/A
L.2	Adding machines and cash registers	No such device	N/A
L.3	Erasers	No such device	N/A
L.4	Pencil sharpeners	No such device	N/A
L.5	Duplicators and copy machines	No such device	N/A
L.6	Motor-operated files	No such device	N/A
L.7	Other business equipment	Operated according to the most unfavourable way of operation given in the the manual	P

M	ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)		N/A
M.1	Introduction	No need to be considered	N/A
M.2	Method A		N/A
M.3	Method B		N/A
M.3.1	Ringling signal		N/A
M.3.1.1	Frequency (Hz)		—
M.3.1.2	Voltage (V)		—
M.3.1.3	Cadence; time (s), voltage (V)		—
M.3.1.4	Single fault current (mA)		—
M.3.2	Tripping device and monitoring voltage		N/A
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
M.3.2.2	Tripping device		N/A
M.3.2.3	Monitoring voltage (V)		N/A

N	ANNEX N, IMPULSE TEST GENERATORS (see 1.5.7.2, 1.5.7.3, 2.10.3.9, 6.2.2.1, 7.3.2, 7.4.3 and Clause G.5)		N/A
N.1	ITU-T impulse test generators	No need to be considered	N/A
N.2	IEC 60065 impulse test generator		N/A

P	ANNEX P, NORMATIVE REFERENCES		—
----------	--------------------------------------	--	---

Q	ANNEX Q, Voltage dependent resistors (VDRs) (see 1.5.9.1)		N/A
----------	--	--	------------

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- Preferred climatic categories	No need to be considered	N/A
	- Maximum continuous voltage		N/A
	- Combination pulse current		N/A
	Body of the VDR Test according to IEC60695-11-5.....		N/A
	Body of the VDR. Flammability class of material (min V-1).....		N/A
R	ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES		N/A
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6.2)	No need to be considered	N/A
R.2	Reduced clearances (see 2.10.3)		N/A
S	ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)		N/A
S.1	Test equipment	No need to be considered	N/A
S.2	Test procedure		N/A
S.3	Examples of waveforms during impulse testing		N/A
T	ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)		N/A
		No need to be considered	—
U	ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)		N/A
		No need to be considered	—
V	ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)		N/A
V.1	Introduction	No need to be considered	N/A
V.2	TN power distribution systems		N/A
W	ANNEX W, SUMMATION OF TOUCH CURRENTS		N/A
W.1	Touch current from electronic circuits	No need to be considered	N/A
W.1.1	Floating circuits		N/A
W.1.2	Earthed circuits		N/A
W.2	Interconnection of several equipments		N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
W.2.1	Isolation		N/A
W.2.2	Common return, isolated from earth		N/A
W.2.3	Common return, connected to protective earth		
X	ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)		N/A
X.1	Determination of maximum input current	No need to be considered	N/A
X.2	Overload test procedure		N/A
Y	ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)		N/A
Y.1	Test apparatus	No need to be considered	N/A
Y.2	Mounting of test samples		N/A
Y.3	Carbon-arc light-exposure apparatus		N/A
Y.4	Xenon-arc light exposure apparatus		N/A
Z	ANNEX Z, OVERVOLTAGE CATEGORIES (see 2.10.3.2 and Clause G.2)		N/A
AA	ANNEX AA, MANDREL TEST (see 2.10.5.8)		N/A
BB	ANNEX BB, CHANGES IN THE SECOND EDITION		—
CC	ANNEX CC, Evaluation of integrated circuit (IC) current limiters		N/A
CC.1	General	No need to be considered	N/A
CC.2	Test program 1.....		N/A
CC.3	Test program 2.....		N/A
CC.4	Test program 3.....		N/A
CC.5	Compliance.....		N/A
DD	ANNEX DD, Requirements for the mounting means of rack-mounted equipment		N/A
DD.1	General	No need to be considered	N/A
DD.2	Mechanical strength test, variable N.....		N/A
DD.3	Mechanical strength test, 250N, including end stops.....		N/A
DD.4	Compliance.....		N/A

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

EE	ANNEX EE, Household and home/office document/media shredders		N/A
EE.1	General	No need to be considered	N/A
EE.2	Markings and instructions		N/A
	Use of markings or symbols.....:		N/A
	Information of user instructions, maintenance and/or servicing instructions.....:		N/A
EE.3	Inadvertent reactivation test.....:		N/A
EE.4	Disconnection of power to hazardous moving parts:		N/A
	Use of markings or symbols.....:		N/A
EE.5	Protection against hazardous moving parts		N/A
	Test with test finger (Figure 2A)		N/A
	Test with wedge probe (Figure EE1 and EE2)		N/A

1.5.1	TABLE: List of critical components				P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
External AC/DC Adapter	SHENZHEN KAIDIER ELECTROINC CO., LTD.	HWT-25W-050200AH	Input: 100-240 Vac, 50/60Hz, 0.3A. Output: 5Vdc, 2000mA. Complied with LPS.	EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 + A2: 2013	Tested with appliance
Plastic material of enclosure	Asia Int'l Enterprise (Hong Kong) Ltd	A2200HF	60 °C, HB, Min thickness: 1.5mm	Applicable parts of EN 60950-1	Tested with appliance
(alternative)	LG Chemical (Guangzhou) Engineering Plastic Co Ltd	LUPOY SC-1004(m)	80 °C, HB, Min thickness: 0.7mm	Applicable parts of EN 60950-1	Tested with appliance
PCB	Tigerbuilder Circuit (Suzhou) Co Ltd	H1	130°C, V-0	Applicable parts of EN 60950-1	Tested with appliance
(alternative)	Interchangeable	Interchangeable	Min. 130°C, V-1 or better	Applicable parts of EN 60950-1 UL 94	ETL, S, UL or other EU Cert. marks
1) An asterisk indicates a mark which assures the agreed level of surveillance 2) The "Interchangeable "means any type from any manufacturer that complies with the specification can be used.					

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.5.1	TABLE: Opto Electronic Devices		N/A
Manufacturer..... : Type..... : Separately tested..... : Bridging insulation..... : External creepage distance..... : Internal creepage distance..... : Distance through insulation..... : Tested under the following conditions..... : Input..... : Output..... : supplementary information - Refer to appended table 1.5.1 for details.			

1.6.2	TABLE: Electrical data (in normal conditions)					P
U (V)	I (A)	I _{rated} (A)	P (W)	Fuse #	I _{battery} (A)	Condition/status
5.0Vdc (Output of AC/DC adapter)	1.986	2.0	--	--	--	Playing mode under max. normal condition.
Supplementary information:						
Only verification for output of AC/DC adapter.						

2.1.1.5 c) 1)	TABLE: max. V, A, VA test				P
Voltage (rated) (V)	Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)	
Battery output	--	4.17	3.05	10.07	
supplementary information:					

2.1.1.5 c) 2)	TABLE: stored energy		N/A
Capacitance C (μF)	Voltage U (V)	Energy E (J)	
supplementary information:			

IEC 60950-1				
Clause	Requirement + Test	Result - Remark	Verdict	
2.2	TABLE: evaluation of voltage limiting components in SELV circuits		N/A	
Component (measured between)		max. voltage (V) (normal operation)		Voltage Limiting Components
		V peak	V d.c.	
Fault test performed on voltage limiting components		Voltage measured (V) in SELV circuits (V peak or V d.c.)		
supplementary information:				

2.5	TABLE: Limited power sources					P
Circuit output tested: See below						
Note: Measured Uoc (V) with all load circuits disconnected: see the below						
Components	Sample No.	Uoc (V)	I _{sc} (A)		VA	
			Meas.	Limit	Meas.	Limit
supplementary information:						
SC=Short circuit, OC=Open circuit						
“*” means bypass the protect IC U2 and test the PTC directly whether it is suitable or not.						

2.10.2	Table: working voltage measurement				N/A
Location		Peak voltage (V)	RMS voltage (V)	Comments	
supplementary information:					

2.10.3 and 2.10.4	TABLE: Clearance and creepage distance measurements						N/A
Clearance (cl) and creepage distance (cr) at/of/between:	U peak (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required cr (mm)	cr (mm)	
Functional insulation							
Basic/Supplementary insulation							

TRF No. IEC60950_1F

Electrical Uniform Test Service Co., Ltd.

F2, building 25, Hengfeng Industrial Area, Zhoushi Rd, Baoan, Shenzhen, China

Tel.: +86-755 23225153, Fax: +86-755 29651921

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

Reinforced insulation						
Supplementary information:						

2.10.5	TABLE: Distance through insulation measurements				N/A
Distance through insulation (DTI) at/of:	U peak (V)	U rms (V)	Test voltage (V)	Required DTI (mm)	DTI (mm)
The sheet material at/of:	U peak (V)	U rms (V)	Test voltage (V)	Required layers	Layers
supplementary information:					
FI: Functional insulation; BI: Basic insulation; SI: Supplementary insulation; RI: reinforced insulation.					

IEC 60950-1									
Clause	Requirement + Test					Result - Remark			Verdict
4.3.8	TABLE: Batteries								N/A
The tests of 4.3.8 are applicable only when appropriate battery data is not available						Tested with appliance			N/A
Is it possible to install the battery in a reverse polarity position?						Impossible			N/A
	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.
Max. current during normal condition									
Max. current during fault condition									
Test results:									Verdict
- Chemical leaks						N/A			N/A
- Explosion of the battery						N/A			N/A
- Emission of flame or expulsion of molten metal						N/A			N/A
- Electric strength tests of equipment after completion of tests						N/A			N/A
Supplementary information:									

4.3.8	TABLE: Batteries	N/A
Battery category.....:		
Manufacturer.....:		
Type / model.....:		
Voltage.....:		
Capacity.....:		
Tested and Certified by (incl. Ref. No.).....:		
Circuit protection diagram:		

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

MARKINGS AND INSTRUCTIONS (1.7.12, 1.7.15)

Location of replaceable battery

Language(s)

Close to the battery

In the servicing instructions

In the operating instructions

4.5	TABLE: Thermal requirements							P
	Supply voltage (V)	5Vdc ¹⁾	5Vdc ²⁾	Fully charged battery ³⁾	—			
	Ambient Tmin (°C)	25	25		—			
	Ambient Tmax (°C)	25	25		—			
Maximum measured temperature T of part/at:		T (°C)				Allowed Tmax (°C)		
PCB surface (near U101)		35	46			130		
PCB surface (near U501)		34	45			130		
PCB surface (near U502)		33	44			130		
Battery surface		30	38			55		
Enclosure(Rear, plastic)		30	36			75		
Screen surface		28	41			65		
Temperature T of winding:	t ₁ (°C)	R ₁ (Ω)	t ₂ (°C)	R ₂ (Ω)	T (°C)	Allowed T _{max} (°C)	Insulation class	
--	--	--	--	--	--	--	--	
Supplementary information:								
1. Only charging.								
2. Charging and playing pink noise mode under max. normal condition								
3. Discharging and playing pink noise mode under max. normal condition								

4.5.5	TABLE: Ball pressure test of thermoplastic parts			N/A
	Allowed impression diameter (mm) ≤ 2 mm			—
Part		Test temperature (°C)	Impression diameter (mm)	
Supplementary information:				

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.7	TABLE: Resistance to fire					P
Part	Manufacturer of material	Type of material	Thickness (mm)	Flammability class	Evidence	
See table 1.5.1 for details						
Supplementary information:						
All materials used for resistance to fire which is certified by UL, the relevant information refer to appended table 1.5.1 for details.						

5.1	TABLE: touch current measurement			N/A
Measured between:	Measured (mA)	Limit (mA)	Comments/conditions	
supplementary information:				

5.2	TABLE: Electric strength tests, impulse tests and voltage surge tests				N/A
Test voltage applied between:		Voltage shape (AC, DC, impulse, surge)	Test voltage (V)	Breakdown Yes / No	
Supplementary information:					
The core of transformer is considered as primary live part.					

5.3	TABLE: Fault condition tests					P
	Ambient temperature (°C)				25°C	—
	Power source for EUT: Manufacturer, model/type, output rating				—	—
Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
USB Output of EUT	OL	90V	9.2 Hrs	--	1.481	Increased output current up to 12.5A, and then the apparatus protected to increase loading current, no higher temperature rise exceeding its limit occurred. No hazards. Winding surface of T1: 117°C Max. loading: 5Vdc, 12.45A

IEC 60950-1						
Clause	Requirement + Test					Result - Remark
						Verdict
USB Output of EUT	SC	264	30mins	--	0.017	EUT protected immediately, input power dropped to 0.91W. No hazards.
C28	SC	264	30mins	--	0.034	EUT protected immediately, input power dropped to 2.02W. No hazards.
Pin 1 of U10	OC	264	30mins	--	0	EUT protected immediately, input power dropped to 0W. No hazards.
Pin 3 of U10	OC	264	30mins	--	0	EUT protected immediately, input power dropped to 0W. No hazards.
Pin 3&4 of U10	SC	264	30mins	--	0.018	EUT protected immediately, input power dropped to 0.44W. No hazards.
Pin 1&3 of Q1	SC	264	30mins	--	0.018	EUT protected immediately, input power dropped to 0.42W. No hazards.
Pin 1&2 of Q1	SC	264	10mins	--	0	EUT shut down immediately, F1, Q1 were damaged. Repeated 10 times. No hazards.
Pin 3&2 of Q1	SC	264	10mins	--	0	EUT shut down immediately, F1, was damaged. Repeated 10 times. No hazards.
Pin 1&2 of U1	SC	264	30mins	--	0.17	EUT protected immediately, input power dropped to 0.61W. No hazards.
BD1	SC	264	10mins	--	0	EUT shut down immediately, F1 was damaged. Repeated 10 times. No hazards.
CE1	SC	264	10mins	--	0	EUT shut down immediately, F1, was damaged. Repeated 10 times. No hazards.
Supplementary information: 1) SC : Short-circuited; OC : Open-circuited; OL : Over-load; BK : Block; RP : Reverse-polarity; LK : Lock; DC : Disconnect; OVC : Overcharging under Max. available charging voltage; 2) Observation: The observations during and after fault condition tests.						
C.2	TABLE: transformers					N/A

IEC 60950-1							
Clause	Requirement + Test			Result - Remark			Verdict
Loc.	Tested insulation	Working voltage peak / V (2.10.2)	Working voltage rms / V (2.10.2)	Required electric strength (5.2)	Required clearance / mm (2.10.3)	Required creepage distance / mm (2.10.4)	Required distance thr. insul. (2.10.5)
Loc.	Tested insulation			Test voltage/ V	Measured clearance / mm	Measured creepage dist./ mm	Measured distance thr. insul. / mm; number of layers
supplementary information:							

C.2	TABLE: transformers	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 60950-1 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES

Information technology equipment – Safety –

Part 1: General requirements

Differences according to.....: EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013

Attachment Form No......: EU_GD_IEC60950_1E

Attachment Originator.....: SGS Fimko Ltd

Master Attachment.....: Date 2014-02

Copyright © 2014 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013 – CENELEC COMMON MODIFICATIONS

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
	Clauses, subclauses, notes, tables and figures which are additional to those in IEC60950-1 and it's amendmets are prefixed "Z"		
Contents (A2:2013)	Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZD (informative) IEC and CENELEC code designations for flexible cords		P
General	Delete all the "country" notes in the reference document (IEC 60950-1:2005) according to the following list: 1.4.8 Note 2 1.5.1 Note 2 & 3 1.5.7.1 Note 1.5.8 Note 2 1.5.9.4 Note 1.7.2.1 Note 4, 5 & 6 2.2.3 Note 2.2.4 Note 2.3.2 Note 2.3.2.1 Note 2 2.3.4 Note 2 2.6.3.3 Note 2 & 3 2.7.1 Note 2.10.3.2 Note 2 2.10.5.13 Note 3 3.2.1.1 Note 3.2.4 Note 3. 2.5.1 Note 2 4.3.6 Note 1 & 2 4.7 Note 4 4.7.2.2 Note 4.7.3.1 Note 2 5.1.7.1 Note 3 & 4 5.3.7 Note 1 6 Note 2 & 5 6.1.2.1 Note 2 6.1.2.2 Note 6.2.2 Note 6.2.2.1 Note 2 6.2.2.2 Note 7.1 Note 3 7.2 Note 7.3 Note 1 & 2 G.2.1 Note 2 Annex H Note 2		P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
General (A1:2010)	Delete all the "country" notes in the reference document (IEC 60950-1:2005/A1:2010) according to the following list: 1.5.7.1 Note 6.1.2.1 Note 2 6.2.2.1 Note 2 EE.3 Note		P
General (A2:2013)	Delete all the "country" notes in the reference document (IEC 60950-1:2005/A2:2013) according to the following list: 2.7.1 Note * 2.10.3.1 Note 2 6.2.2. Note * Note of secretary: Text of Common Modification remains unchanged.		P
1.1.1 (A1:2010)	Replace the text of NOTE 3 by the following. NOTE 3 The requirements of EN 60065 may also be used to meet safety requirements for multimedia equipment. See IEC Guide 112, Guide on the safety of multimedia equipment. For television sets EN 60065 applies.		N/A
1.3.Z1	Add the following subclause: 1.3.Z1 Exposure to excessive sound pressure The apparatus shall be so designed and constructed as to present no danger when used for its intended purpose, either in normal operating conditions or under fault conditions, particularly providing protection against exposure to excessive sound pressures from headphones or earphones. NOTE Z1 A new method of measurement is described in EN 50332-1, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for "one package equipment", and in EN 50332-2, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Guidelines to associate sets with headphones coming from different manufacturers.		N/A
(A12:2011)	In EN 60950-1:2006/A12:2011 Delete the addition of 1.3.Z1 / EN 60950-1:2006 Delete the definition 1.2.3.Z1 / EN 60950-1:2006 /A1:2010		N/A
1.5.1 (Added info*)	Add the following NOTE: NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC. New Directive 2011/65/11 *		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.1 (A1:2010)	In addition, for a PORTABLE SOUND SYSTEM, the instructions shall include a warning that excessive sound pressure from earphones and headphones can cause hearing loss.		N/A
1.7.2.1 (A12:2011)	In EN 60950-1:2006/A12:2011 Delete NOTE Z1 and the addition for Portable Sound System. Add the following clause and annex to the existing standard and amendments.		N/A
	Zx Protection against excessive sound pressure from personal music players		N/A
	Zx.1 General This sub-clause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. It also specifies requirements for earphones and headphones intended for use with personal music players. A personal music player is a portable equipment for personal use, that: <ul style="list-style-type: none"> - is designed to allow the user to listen to recorded or broadcast sound or video; and - primarily uses headphones or earphones that can be worn in or on or around the ears; and - allows the user to walk around while in use. NOTE 1 Examples are hand-held or body-worn portable CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment. A personal music player and earphones or headphones intended to be used with personal music players shall comply with the requirements of this sub-clause. The requirements in this sub-clause are valid for music or video mode only. The requirements do not apply: <ul style="list-style-type: none"> - while the personal music player is connected to an external amplifier; or - while the headphones or earphones are not used. NOTE 2 An external amplifier is an amplifier which is not part of the personal music player or the listening device, but which is intended to play the music as a standalone music player.		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
Cont'd	<p>The requirements do not apply to:</p> <ul style="list-style-type: none"> - hearing aid equipment and professional equipment; <p>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p> <ul style="list-style-type: none"> - analogue personal music players (personal music players without any kind of digital processing of the sound signal) that are brought to the market before the end of 2015. <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <p>For equipment which is clearly designed or intended for use by young children, the limits of EN 71-1 apply.</p>		N/A
	<p>Zx.2 Equipment requirements</p> <p>No safety provision is required for equipment that complies with the following:</p> <ul style="list-style-type: none"> - equipment provided as a package (personal music player with its listening device), where - the acoustic output $L_{Aeq,T}$ is ≤ 85 dBA measured while playing the fixed "programme simulation noise" as described in EN 50332-1; and - a personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is ≤ 27 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" as described in EN 50332-1. <p>NOTE 1 Wherever the term acoustic output is used in this clause, the 30 s A-weighted equivalent sound pressure level $L_{Aeq,T}$ is meant. See also Zx.5 and Annex Zx.</p> <p>All other equipment shall:</p> <ol style="list-style-type: none"> protect the user from unintentional acoustic outputs exceeding those mentioned above; and have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and 		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
Cont'd	<p>c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time; and</p> <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always required.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off.</p> <p>d) have a warning as specified in Zx.3; and</p> <p>e) not exceed the following:</p> <p>1) equipment provided as a package (player with its listening device), the acoustic output shall be ≤ 100 dBA measured while playing the fixed "programme simulation noise" described in EN 50332-1; and</p> <p>2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be ≤ 150 mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" described in EN 50332-1.</p> <p>For music where the average sound pressure (long term $L_{Aeq,T}$) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. In this case T becomes the duration of the song.</p> <p>NOTE 4 Classical music typically has an average sound pressure (long term $L_{Aeq,T}$) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA.</p> <p>For example, if the player is set with the programme simulation noise to 85 dBA, but the average music level of the song is only 65 dBA, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dBA.</p>		P

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>Zx.3 Warning</p> <p>The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following:</p> <ul style="list-style-type: none"> - the symbol of Figure 1 with a minimum height of 5 mm; and - the following wording, or similar: "To prevent possible hearing damage, do not listen at high volume levels for long periods." <div data-bbox="453 745 667 925" data-label="Image"> </div> <p>Figure 1 – Warning label (IEC 60417-6044)</p> <p>Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level.</p>		N/A
	Zx.4 Requirements for listening devices (headphones and earphones)		N/A
	<p>Zx.4.1 Wired listening devices with analogue input</p> <p>With 94 dBA sound pressure output $L_{Aeq,T}$, the input voltage of the fixed "programme simulation noise" described in EN 50332-2 shall be ≥ 75 mV.</p> <p>This requirement is applicable in any mode where the headphones can operate (active or passive), including any available setting (for example built-in volume level control).</p> <p>NOTE The values of 94 dBA – 75 mV correspond with 85dBA – 27 mV and 100 dBA – 150 mV.</p>		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
	<p>Zx.4.2 Wired listening devices with digital input</p> <p>With any playing device playing the fixed “programme simulation noise” described in EN 50332-1 (and respecting the digital interface standards, where a digital interface standard exists that specifies the equivalent acoustic level), the acoustic output $L_{Aeq,T}$ of the listening device shall be ≤ 100 dBA.</p> <p>This requirement is applicable in any mode where the headphones can operate, including any available setting (for example built-in volume level control, additional sound feature like equalization, etc.).</p> <p>NOTE An example of a wired listening device with digital input is a USB headphone.</p>		N/A
	<p>Zx.4.3 Wireless listening devices</p> <p>In wireless mode:</p> <ul style="list-style-type: none"> - with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and - respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and - with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the abovementioned programme simulation noise, the acoustic output $L_{Aeq,T}$ of the listening device shall be ≤ 100 dBA. <p>NOTE An example of a wireless listening device is a Bluetooth headphone.</p>		N/A
	<p>Zx.5 Measurement methods</p> <p>Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable. Unless stated otherwise, the time interval T shall be 30 s.</p> <p>NOTE Test method for wireless equipment provided without listening device should be defined.</p>		N/A

IEC 60950-1												
Clause	Requirement + Test	Result - Remark	Verdict									
2.7.1	<p>Replace the subclause as follows:</p> <p>Basic requirements</p> <p>To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>	Not appropriate	N/A									
2.7.2	This subclause has been declared 'void'.	Not appropriate	N/A									
3.2.3	Delete the NOTE in Table 3A, and delete also in this table the conduit sizes in parentheses.	Not appropriate	N/A									
3.2.5.1	<p>Replace</p> <p>“60245 IEC 53” by “H05 RR-F”;</p> <p>“60227 IEC 52” by “H03 VV-F or H03 VVH2-F”;</p> <p>“60227 IEC 53” by “H05 VV-F or H05 VVH2-F2”.</p> <p>In Table 3B, replace the first four lines by the following:</p> <table><tr><td>Up to and including 6 </td><td>0,75 ^{a)} </td><td>Over 6</td></tr><tr><td>up to and including 10 (0,75) ^{b)}</td><td>1,0 </td><td>Over 10</td></tr><tr><td>up to and including 16 (1,0) ^{c)}</td><td>1,5 </td><td></td></tr></table> <p>In the conditions applicable to Table 3B delete the words “in some countries” in condition ^{a)}.</p> <p>In NOTE 1, applicable to Table 3B, delete the second sentence.</p>	Up to and including 6	0,75 ^{a)}	Over 6	up to and including 10 (0,75) ^{b)}	1,0	Over 10	up to and including 16 (1,0) ^{c)}	1,5		Not appropriate	N/A
Up to and including 6	0,75 ^{a)}	Over 6										
up to and including 10 (0,75) ^{b)}	1,0	Over 10										
up to and including 16 (1,0) ^{c)}	1,5											

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.5.1 (A2:2013)	NOTE Z1 The harmonised code designations corresponding to the IEC cord types are given in Annex ZD	Not appropriate	N/A
3.3.4	In Table 3D, delete the fourth line: conductor sizes for 10 to 13 A, and replace with the following: Over 10 up to and including 16 1,5 to 2,5 1,5 to 4 Delete the fifth line: conductor sizes for 13 to 16 A	Not appropriate	N/A
4.3.13.6 (A1:2010)	Replace the existing NOTE by the following: NOTE Z1 Attention is drawn to: 1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz, and 2006/25/EC: Directive on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation). Standards taking into account mentioned Recommendation and Directive which demonstrate compliance with the applicable EU Directive are indicated in the OJEC.	Not appropriate	N/A
Annex H	Replace the last paragraph of this annex by: At any point 10 cm from the surface of the OPERATOR ACCESS AREA, the dose rate shall not exceed 1 µSv/h (0,1 mR/h) (see NOTE). Account is taken of the background level. Replace the notes as follows: NOTE These values appear in Directive 96/29/Euratom. Delete NOTE 2.	Not appropriate	N/A
Bibliography	Additional EN standards.		—

ZA	NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS	—
-----------	--	---

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.2.4.1	In Denmark , certain types of Class I appliances (see 3.2.1.1) may be provided with a plug not establishing earthing conditions when inserted into Danish socket-outlets.	Not appropriate	N/A
1.2.13.14 (A11:2009)	In Norway and Sweden , for requirements see 1.7.2.1 and 7.3 of this annex.		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
Clause	Requirement + Test	Result - Remark	Verdict
1.5.7.1 (A11:2009)	In Finland, Norway and Sweden , resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.1. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.	Not appropriate	N/A
1.5.8	In Norway , due to the IT power system used (see annex V, Figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).	Not appropriate	N/A
1.5.9.4	In Finland, Norway and Sweden , the third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.	Not appropriate	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.1	<p>In Finland, Norway and Sweden, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet. The marking text in the applicable countries shall be as follows:</p> <p>In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan"</p> <p>In Norway: "Apparatet må tilkoples jordet stikkontakt"</p> <p>In Sweden: "Apparaten skall anslutas till jordat uttag"</p> <p>In Norway and Sweden, the screen of the cable distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a cable distribution system.</p> <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by e.g. a retailer.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>"Equipment connected to the protective earthing of the building installation through the mains connection or through other equipment with a connection to protective earthing – and to a cable distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)."</p>	Not appropriate	N/A
1.7.2.1 (A11:2009)			

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
Cont'd	<p>NOTE In Norway, due to regulation for installations of cable distribution systems, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Utstyr som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av utstyret til kabel-TV nettet installeres en galvanisk isolator mellom utstyret og kabel- TV nettet.”</p> <p>Translation to Swedish:</p> <p>”Utrustning som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av utrustningen till kabel-TV nät galvanisk isolator finnas mellan utrustningen och kabel-TV nätet.”</p>	Not appropriate	N/A
1.7.2.1 (A2:2013)	<p>In Denmark, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet.</p> <p>The marking text in Denmark shall be as follows:</p> <p>In Denmark: “Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord.”</p>	Not appropriate	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.5	In Denmark , socket-outlets for providing power to other equipment shall be in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-3a, DK 1-5a or DK 1-7a, when used on Class I equipment. For STATIONARY EQUIPMENT the socket-outlet shall be in accordance with Standard Sheet DK 1-1b or DK 1-5a.	Not appropriate	N/A
1.7.5 (A11:2009)	For CLASS II EQUIPMENT the socket outlet shall be in accordance with Standard Sheet DKA 1-4a.		
1.7.5 (A2:2013)	In Denmark , socket-outlets for providing power to other equipment shall be in accordance with the DS 60884-2-D1:2011. For class I equipment the following Standard Sheets are applicable: DK 1-3a, DK 1-1c, DK 1-1d, DK 1-5a or DK 1-7a, with the exception for STATIONARY EQUIPMENT where the socket-outlets shall be in accordance with Standard Sheet DK 1-1b, DK 1-1c, DK 1-1d or DK 1-5a. Socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance with DS 60884-2-D1 standard sheet DKA 1-4a. Other current rating socket outlets shall be in compliance with by DS 60884-2-D1 Standard Sheet DKA 1-3a or DKA 1-3b. Justification the Heavy Current Regulations, 6c	Not appropriate	N/A
2.2.4	In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.	Not appropriate	N/A
2.3.2	In Finland, Norway and Sweden there are additional requirements for the insulation. See 6.1.2.1 and 6.1.2.2 of this annex.	Not appropriate	N/A
2.3.4	In Norway , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.	Not appropriate	N/A
2.6.3.3	In the United Kingdom , the current rating of the circuit shall be taken as 13 A, not 16 A.	Not appropriate	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
2.7.1	In the United Kingdom , to protect against excessive currents and short-circuits in the PRIMARY CIRCUIT of DIRECT PLUG-IN EQUIPMENT, tests according to 5.3 shall be conducted, using an external protective device rated 30 A or 32 A. If these tests fail, suitable protective devices shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT, so that the requirements of 5.3 are met.	Not appropriate	N/A
2.10.5.13	In Finland, Norway and Sweden , there are additional requirements for the insulation, see 6.1.2.1 and 6.1.2.2 of this annex.	Not appropriate	N/A
3.2.1.1	<p>In Switzerland, supply cords of equipment having a RATED CURRENT not exceeding 10 A shall be provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets:</p> <p>SEV 6532-2.1991 Plug Type 15 3P+N+PE 250/400 V, 10 A</p> <p>SEV 6533-2.1991 Plug Type 11 L+N 250 V, 10 A</p> <p>SEV 6534-2.1991 Plug Type 12 L+N+PE 250 V, 10 A</p> <p>In general, EN 60309 applies for plugs for currents exceeding 10 A. However, a 16 A plug and socket-outlet system is being introduced in Switzerland, the plugs of which are according to the following dimension sheets, published in February 1998:</p> <p>SEV 5932-2.1998: Plug Type 25, 3L+N+PE 230/400 V, 16 A</p> <p>SEV 5933-2.1998: Plug Type 21, L+N, 250 V, 16A</p> <p>SEV 5934-2.1998: Plug Type 23, L+N+PE 250 V, 16 A</p>	Not appropriate	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1	<p>In Denmark, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to the Heavy Current Regulations, Section 107-2-D1.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If poly-phase equipment and single-phase equipment having a RATED CURRENT exceeding 13 A is provided with a supply cord with a plug, this plug shall be in accordance with the Heavy Current Regulations, Section 107-2-D1 or EN 60309-2.</p>	Not appropriate	N/A
3.2.1.1 (A2:2013)	<p>In Denmark, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Justification the Heavy Current Regulations, 6c</p>	Not appropriate	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.2.1.1	<p>In Spain, supply cords of single-phase equipment having a rated current not exceeding 10 A shall be provided with a plug according to UNE 20315:1994.</p> <p>Supply cords of single-phase equipment having a rated current not exceeding 2,5 A shall be provided with a plug according to UNE-EN 50075:1993.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules, shall be provided with a plug in accordance with standard UNE 20315:1994.</p> <p>If poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with UNE-EN 60309-2.</p>	Not appropriate	N/A
3.2.1.1	<p>In the United Kingdom, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a 'standard plug' in accordance with Statutory Instrument 1768:1994 - The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those regulations.</p> <p>NOTE 'Standard plug' is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>	Not appropriate	N/A
3.2.1.1	<p>In Ireland, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to I.S. 411 by means of that flexible cable or cord and plug, shall be fitted with a 13 A plug in accordance with Statutory Instrument 525:1997 - National Standards Authority of Ireland (section 28) (13 A Plugs and Conversion Adaptors for Domestic Use) Regulations 1997.</p>	Not appropriate	N/A
3.2.4	<p>In Switzerland, for requirements see 3.2.1.1 of this annex.</p>	Not appropriate	N/A
3.2.5.1	<p>In the United Kingdom, a power supply cord with conductor of 1,25 mm² is allowed for equipment with a rated current over 10 A and up to and including 13 A.</p>	Not appropriate	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
3.3.4	In the United Kingdom , the range of conductor sizes of flexible cords to be accepted by terminals for equipment with a RATED CURRENT of over 10 A up to and including 13 A is: • 1,25 mm ² to 1,5 mm ² nominal cross-sectional area.	Not appropriate	N/A
4.3.6	In the United Kingdom , the torque test is performed using a socket outlet complying with BS 1363 part 1:1995, including Amendment 1:1997 and Amendment 2:2003 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.	Not appropriate	N/A
4.3.6	In Ireland , DIRECT PLUG-IN EQUIPMENT is known as plug similar devices. Such devices shall comply with Statutory Instrument 526:1997 - National Standards Authority of Ireland (Section 28) (Electrical plugs, plug similar devices and sockets for domestic use) Regulations, 1997.	Not appropriate	N/A
5.1.7.1	In Finland, Norway and Sweden TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for the following equipment: • STATIONARY PLUGGABLE EQUIPMENT TYPE A that is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and is provided with instructions for the installation of that conductor by a SERVICE PERSON; • STATIONARY PLUGGABLE EQUIPMENT TYPE B; • STATIONARY PERMANENTLY CONNECTED EQUIPMENT.	Not appropriate	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.1.2.1 (A1:2010)	<p>In Finland, Norway and Sweden, add the following text between the first and second paragraph of the compliance clause:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>Alternatively for components, there is no distance through insulation requirements for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> - passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and - is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV. 	Not appropriate	N/A
	<p>It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b).</p> <p>It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14: 2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1: 2006, 6.2.2.1; - the additional testing shall be performed on all the test specimens as described in EN 60384-14: - the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14. 	Not appropriate	N/A



IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.1.2.2	In Finland, Norway and Sweden , the exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.	Not appropriate	N/A
7.2	In Finland, Norway and Sweden , for requirements see 6.1.2.1 and 6.1.2.2 of this annex. The term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.	Not appropriate	N/A
7.3 (A11:2009)	In Norway and Sweden , for requirements see 1.2.13.14 and 1.7.2.1 of this annex.	Not appropriate	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 60950-1
EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES
Information technology equipment – Safety –
Part 1: General requirements

EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013 – CENELEC COMMON MODIFICATIONS

IEC 60950-1, GROUP DIFFERENCES (CENELEC common modifications EN)			
Clause	Requirement + Test	Result - Remark	Verdict
Contents	Add the following annexes: Annex ZC (informative) A-deviations		P

ZC	A-DEVIATIONS (informative)	N/A
1.5.1	Sweden (Ordinance 1990:944) Add the following: NOTE In Sweden, switches containing mercury are not permitted.	N/A
1.5.1	Switzerland (Ordinance on environmentally hazardous substances SR 814.081, Annex 1.7, Mercury - Annex 1.7 of SR 814.81 applies for mercury.) Add the following: NOTE In Switzerland, switches containing mercury such as thermostats, relays and level controllers are not allowed.	N/A
1.7.2.1	Denmark (Heavy Current Regulations) Supply cords of CLASS I EQUIPMENT, which is delivered without a plug, must be provided with a visible tag with the following text: <div style="text-align: center;">Vigtigt! Lederen med grøn/gul isolation må kun tilsluttes en klemme mærket  eller </div> If essential for the safety of the equipment, the tag must in addition be provided with a diagram, which shows the connection of the other conductors, or be provided with the following text: "For tilslutning af de øvrige ledere, se medfølgende installationsvejledning."	N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7.2.1	<p>Germany (Gesetz über technische Arbeitsmittel und Verbraucherprodukte (Geräte- und Produktsicherheitsgesetz – GPSG) [Law on technical labour equipment and consumer products], of 6th January 2004, Section 2, Article 4, Clause (4), Item 2).</p> <p>If for the assurance of safety and health certain rules during use, amending or maintenance of a technical labour equipment or readymade consumer product are to be followed, a manual in German language has to be delivered when placing the product on the market.</p> <p>Of this requirement, rules for use even only by SERVICE PERSONS are not exempted.</p>		N/A
1.7.5	<p>Denmark (Heavy Current Regulations)</p> <p>With the exception of CLASS II EQUIPMENT provided with a socket outlet in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-4a, CLASS II EQUIPMENT shall not be fitted with socket-outlets for providing power to other equipment.</p>		N/A
1.7.13	<p>Switzerland (Ordinance on chemical hazardous risk reduction SR 814.81, Annex 2.15 Batteries)</p> <p>Annex 2.15 of SR 814.81 applies for batteries.</p>		N/A
5.1.7.1	<p>Denmark (Heavy Current Regulations, Chapter 707, clause 707.4)</p> <p>TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for PERMANENTLY CONNECTED EQUIPMENT and PLUGGABLE EQUIPMENT TYPE B.</p>		N/A

IEC 60950-1			
Clause	Requirement + Test	Result - Remark	Verdict

**Annex ZD
(informative)**

IEC and CENELEC code designations for flexible cords

Type of flexible cord	Code designations	
	IEC	CENELEC
PVC insulated cords		
Flat twin tinsel cord	60227 IEC 41	H03VH-Y
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F
Ordinary polyvinyl chloride sheathed flexible cord	60277 IEC 53	H05VV-F H05VVH2-F
Rubber insulated cords		
Braided cord	60245 IEC 51	H03RT-F
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F
Cords having high flexibility		
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H



Overview of TV Box and accessories






Rear and side view-1 of TV Box



Internal view of TV Box with back cover removed

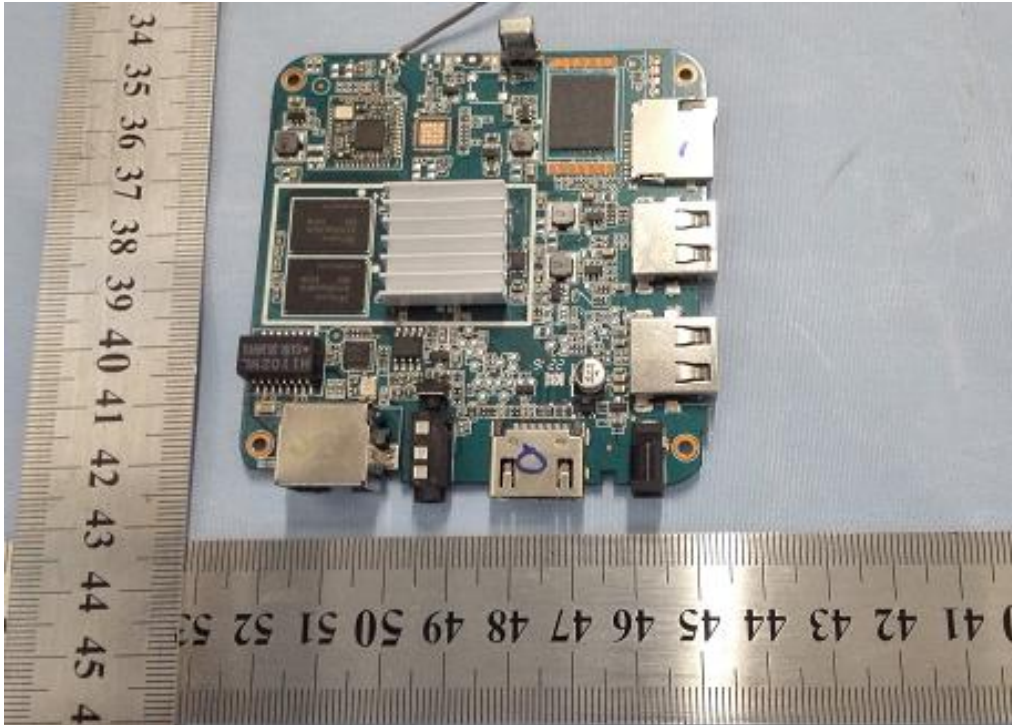

Internal view-1 of TV Box





Adapter view