

UWB

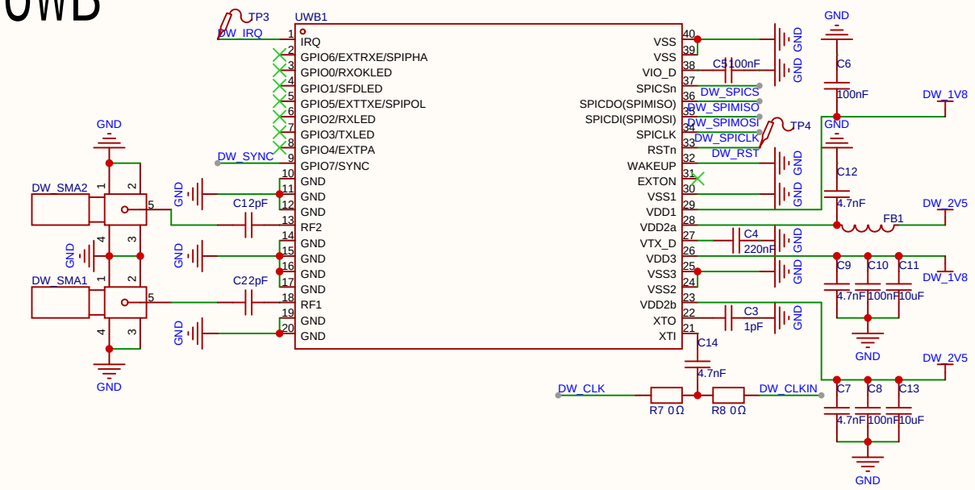


Connector

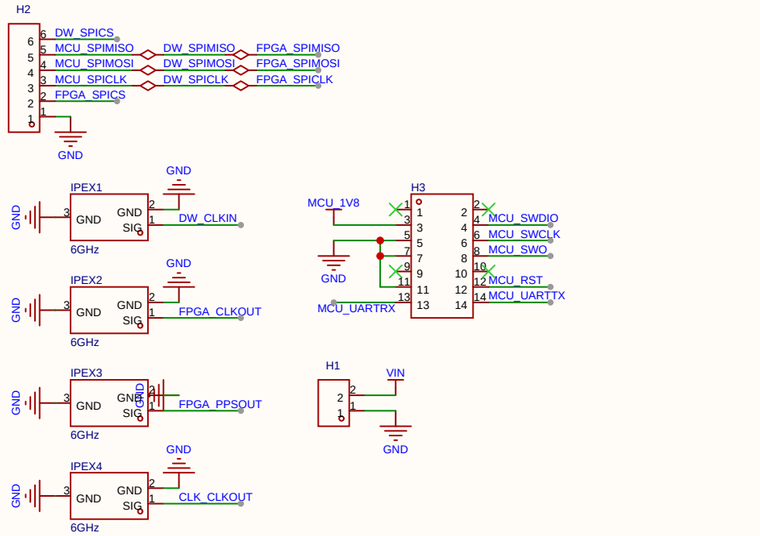


MCU


STM32U5 SMPS Requirements:
1. C@VDD11: 2.2uF±20%, ESR<20mΩ@3MHz, ≥10V
2. C@VDDSMPS: 10uF±20%, ESR<10mΩ@3MHz, ≥10V
3. L@VLXSMPS: 2.2uH±20%, DCR<200mΩ, ≥0.5A

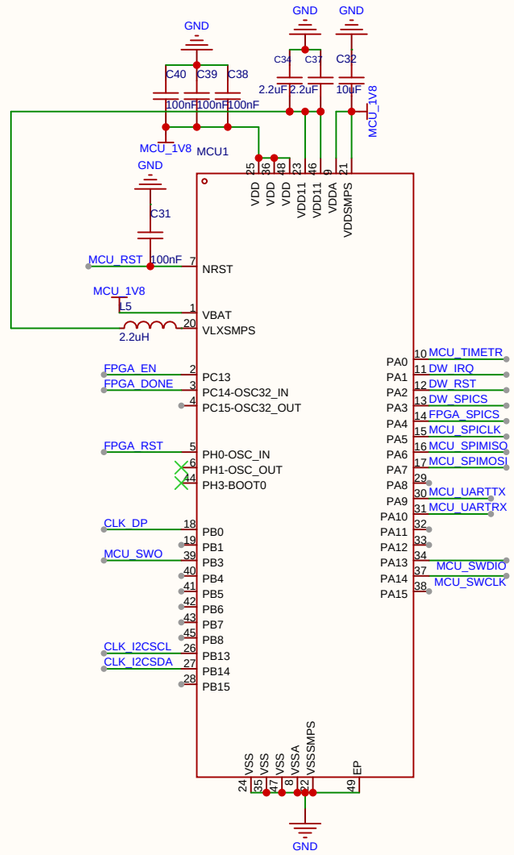



Power

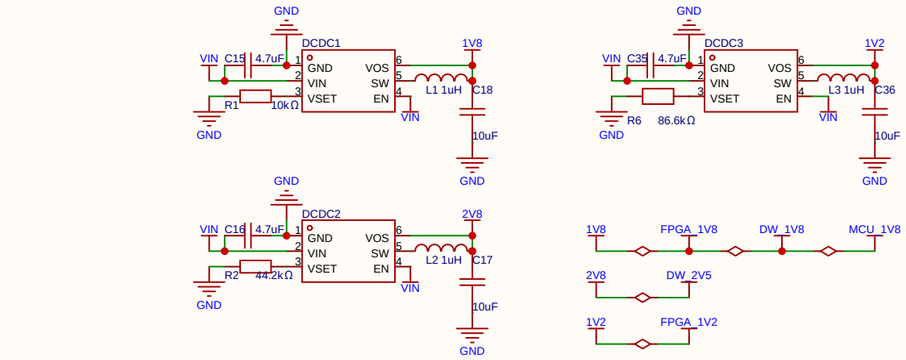


CLK



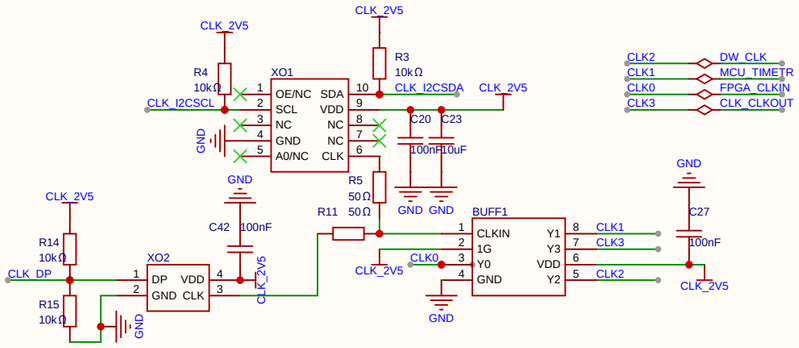



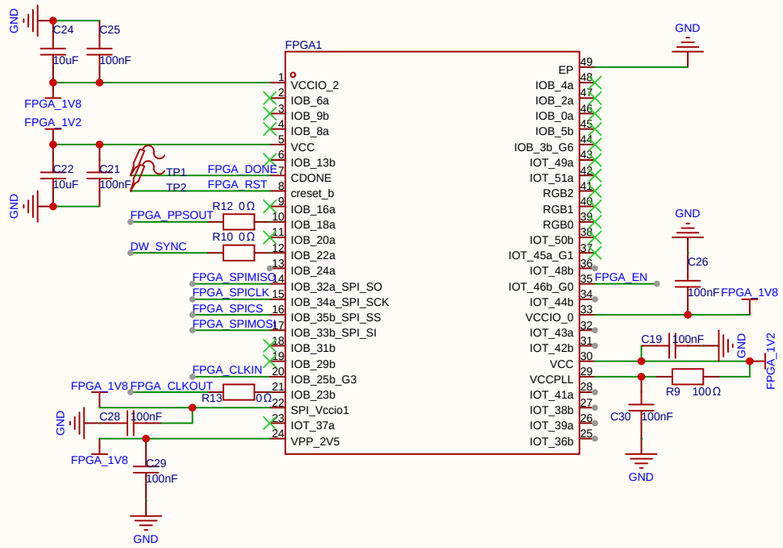

Schematic	Schematic1	Created	2026-06-20
		Updated	2026-06-23
Board	STM32-DW3000	Sheet	P1
Drawn by			
Reviewed by			
		HopWINS-UWBDO	
		Rev: V1.0	Size: A4
JLCEDA		Page 1 of 1	JLCEDA