

Interface Reconstruction Experiment

Original synthetic engineering note | Holdout specimen HN-73

1 Reconstruction path

The reconstruction procedure follows catalog entry 104.7 [12] for every declared interface and operating point. That citation continues the preceding sentence; it names a referenced procedure rather than a new document section. Each branch preserves its own sample identity during replay.

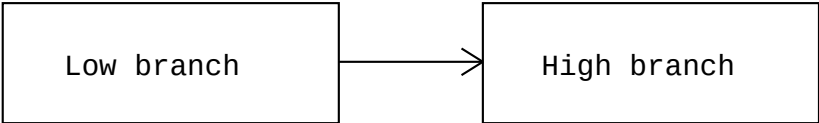


Figure 1. Branch handoff during reconstruction.

The rectangular symbols identify processing stages. Their labels carry no row or column parameter schema. A stable report retains this figure as source evidence.

2 Operating limits

Table 1 binds each signed limit to its own mode. The signs are part of the limits and must remain visible.

Table 1. Independent mode limits

Mode	Limit	Scope
Nominal	-0.20 V	Condition A
Overload	+0.20 V	Condition B

Condition A belongs only to the Nominal mode. Condition B belongs only to the Overload mode. The small table is intentional and contains no graphic nodes; its compact size does not invalidate its bindings.

3 Continuity notes

The replay controller shall preserve the declared ordering.

The timing budget is measured independently of the signed limits.

The controller shall settle within 12 ms after a branch handoff.

No change is made to the Overload limit or either condition owner.

4 Validation boundary

This specimen tests only the declared source structures and changes.

It is original test material and makes no external standards claim.

A report that cannot establish reading order must disclose the risk.