


REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Human Zhou	2013.09.12

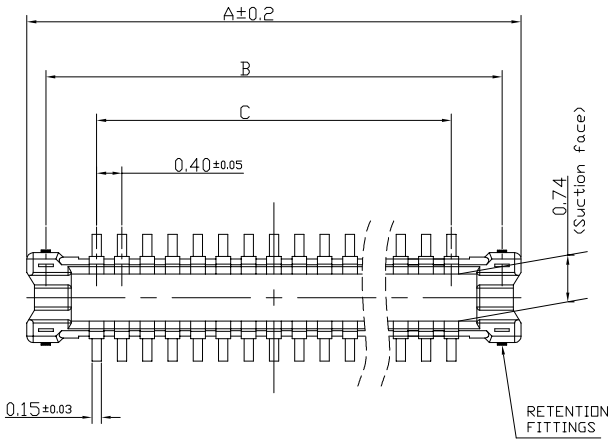



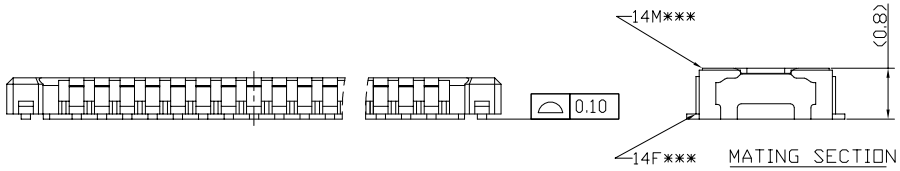

SPECIFICATIONS:


1) MATERIAL:
- *1-1.MOLDED PORTION: LCP Black(UL94 V-0)*
- *1-2.CONTACT AND POST: COPPER ALLOY*

2) SURFACE TREATMENT:
- *2-1.TERMINAL PORTION: BASE: NICKEL PLATING OVERALL; GOLD PLATING CONTACT OVERALL;*
- *2-2.FIT NAIL: BASE: NICKEL PLATING OVERALL;*

3) CHARACTERISTICS:
- *3-1. RATED VOLTAGE: 30V AC/DC*
- *3-2. RATED CURRENT: 0.3A/CONTACT (MAX. 5A AT TOTAL CONTACT)*
- *3-3. INSULATION RESISTANCE: MIN. 1000MΩ (INITIAL)*
- *3-4. BREAKDOWN VOLTAGE: 500V AC FOR 1 MIN.*
- *3-5. SALTWATER SPRAY RESISTANCE (HEADER AND SOCKET MATED): 24 HOURS, INSULATION RESISTANCE MIN.1000MΩ, CONTACT RESISTANCE MAX.50mΩ*
- *3-6. CONTACT RESISTANCE: MAX. 50mΩ*
- *3-7. AMBIENT TEMPERATURE: -55℃-+85℃*
- *3-8. STORAGE TEMPERATURE: -55℃-+85℃ (PRODUCT ONLY); -40℃-+50℃ (EMBOSS PACKING)*
- *3-9. WARRANTY PERIOD: 12 MONTH*
- *3-10. COMPOSITE INSERTION FORCE: 40N MAX*
- *3-11. COMPOSITE REMOVAL FORCE: BEFORE DURABILITY 0.165N/PIN MIN.*
- *3-12. DURABILITY: 30 TIMES*

TABLE:

70	15.80	15.20	13.60
50	11.80	11.20	9.60
40	9.80	9.20	7.60
34	8.60	8.00	6.40
30	7.80	7.20	5.60
24	6.60	6.00	4.40
16	5.00	4.40	2.80
14	4.60	4.00	2.40
12	4.20	3.60	2.00
10	3.80	3.20	1.60
NUMBER OF CONTACTS	A	B	C

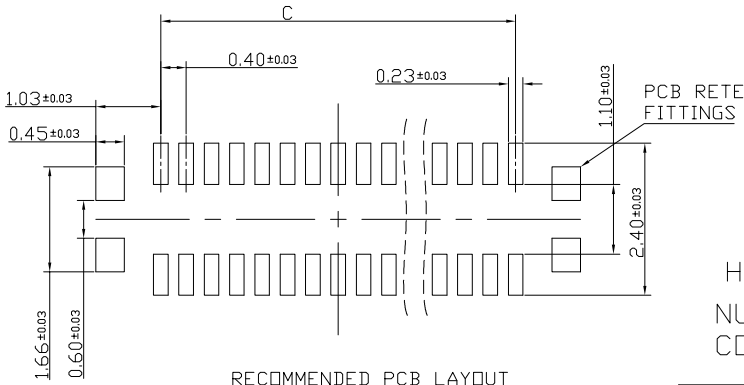

RECOMMENDED PCB LAYOUT

OK-14GM***-04

HEADER

NUMBER OF CONTACTS


PITCH-0.4MM

RoHS

DIMENTION IN mm		APPD:	TITLE: 0.4MM BTB (MATING HEIGHT 0.8H)					
TOLERANCE UNLESS OTHERWISE SPECIFIED		CHKD:	DWG NO: OK-14GM***-04					
. ±0.20	. ±2°		PROJ	Q'TY	SIZE	SHEET	SCALE	REV
.0 ±0.10	.0 ±1°							
.00 ±0.05	.00±0.5°							
.000±0.03	.000±0.3	DRA: George Gao 2015.10.22		--	A4	1/1	1:1	A

OCN TECHNOLOGY

REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Human zhou	2013.09.12

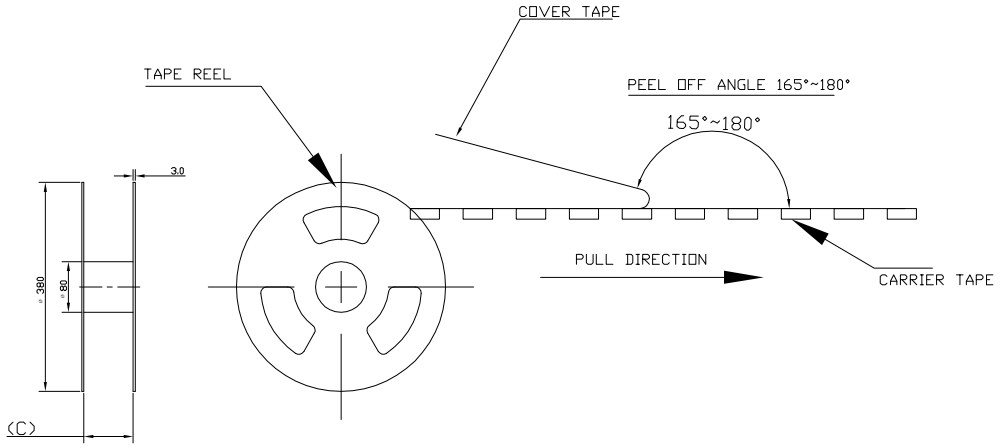

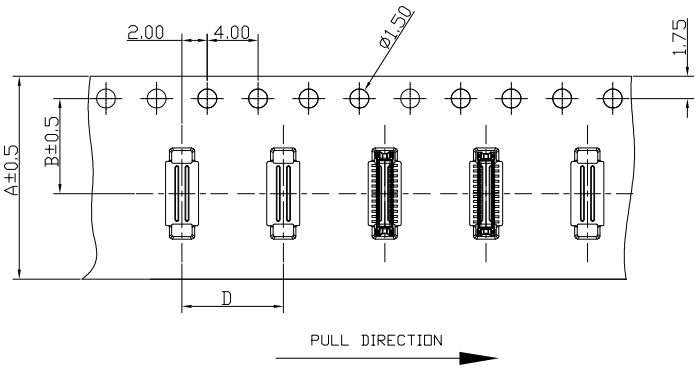



TABLE:


NUMBER OF CONTACTS	A	B	C	D	QTY/REEL
70	24.00	11.50	25.4	4.00	20000
50					
40					
34					
30	16.00	7.50	17.4		
24					
16					
14					
12					
10					

RoHS


DIMENTION IN mm		OCN TECHNOLOGY					
TOLERANCE UNLESS OTHERWISE SPECIFIED		APPD:	TITLE: 0.4MM BTB (MATING HEIGHT 0.8H)				
. ±0.20	. ±2°	CHKD:	DWG NO: OK-14GM***-04				
.0 ±0.10	.0 ±1°						
.00 ±0.05	.00±0.5°	DRA: George Gao 2015.10.22	PROJ	Q'TY	SIZE	SHEET	SCALE	REV
.000±0.03	.000±0.3			--	A4	1/1	1:1	A

REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Human Zhou	2013.09.18
B	SECOND VERSINONS	George Gao	Human Zhou	2015.10.22

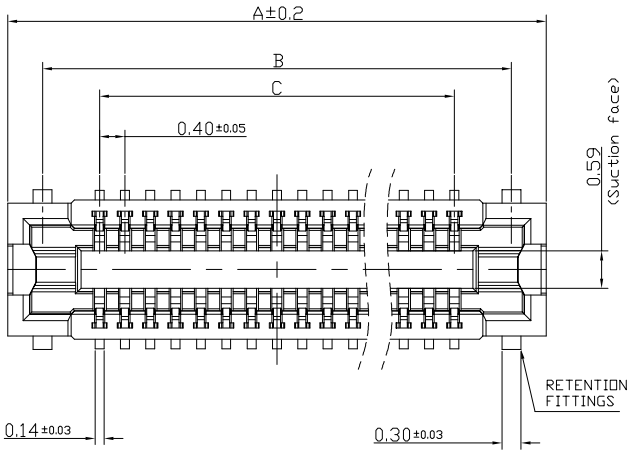







SPECIFICATIONS:


1) MATERIAL:
- *1-1.MOLDED PORTION: LCP Black(UL94 V-0)*
- *1-2.CONTACT AND POST: COPPER ALLOY*

2) SURFACE TREATMENT:
- *2-1.TERMINAL PORTION: BASE: NICKEL PLATING OVERALL; GOLD PLATING CONTACT OVERALL;*
- *2-2.FIT NAIL: BASE: NICKEL PLATING OVERALL;*

3) CHARACTERISTICS:
- *3-1. RATED VOLTAGE: 30V AC/DC*
- *3-2. RATED CURRENT: 0.3A/CONTACT (MAX. 5A AT TOTAL CONTACT)*
- *3-3. INSULATION RESISTANCE: MIN. 1000MΩ (INITIAL)*
- *3-4. BREAKDOWN VOLTAGE: 500V AC FOR 1 MIN.*
- *3-5. SALTWATER SPRAY RESISTANCE (HEADER AND SOCKET MATED): 24 HOURS, INSULATION RESISTANCE MIN.1000MΩ, CONTACT RESISTANCE MAX.50mΩ*
- *3-6. CONTACT RESISTANCE: MAX. 50mΩ*
- *3-7. AMBIENT TEMPERATURE: -55℃-+85℃*
- *3-8. STORAGE TEMPERATURE: -55℃-+85℃ (PRODUCT ONLY); -40℃-+50℃ (EMBOSS PACKING)*
- *3-9. WARRANTY PERIOD: 12 MONTH*
- *3-10. COMPOSITE INSERTION FORCE: 40N MAX*
- *3-11. COMPOSITE REMOVAL FORCE: BEFORE DURABILITY 0.165N/PIN MIN.*
- *3-12. DURABILITY: 30 TIMES*

TABLE:

70	16.50	15.40	13.60
50	12.50	11.40	9.60
40	10.50	9.40	7.60
34	9.30	8.20	6.40
30	8.50	7.40	5.60
24	7.30	6.20	4.40
16	5.70	4.60	2.80
14	5.30	4.20	2.40
12	4.90	3.80	2.00
10	4.50	3.40	1.60
NUMBER OF CONTACTS	A	B	C

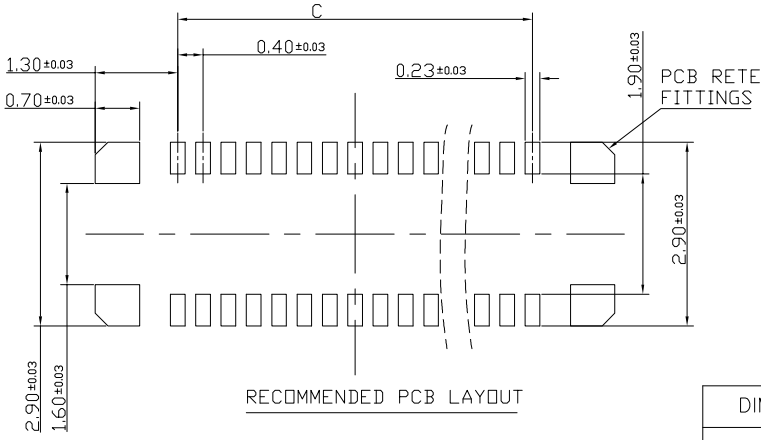

RECOMMENDED PCB LAYOUT

OK-14F***-04

SOCKET

NUMBER OF CONTACTS

PITCH-0.4MM

RoHS

DIMENTION IN mm

TOLERANCE UNLESS OTHERWISE SPECIFIED

. ±0.20	. ±2°
.0 ±0.10	.0 ±1°
.00 ±0.05	.00±0.5°
.000±0.03	.000±0.3

OCN TECHNOLOGY

APPD:

CHKD:

DRA: George Gao 2015.10.22

TITLE: 0.4MM BTB (MATING HEIGHT 0.8H)

DWG NO: OK-14F***-04

PROJ	Q'TY	SIZE	SHEET	SCALE	REV
	--	A4	1/1	1:1	B

REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Human zhou	2013.09.12

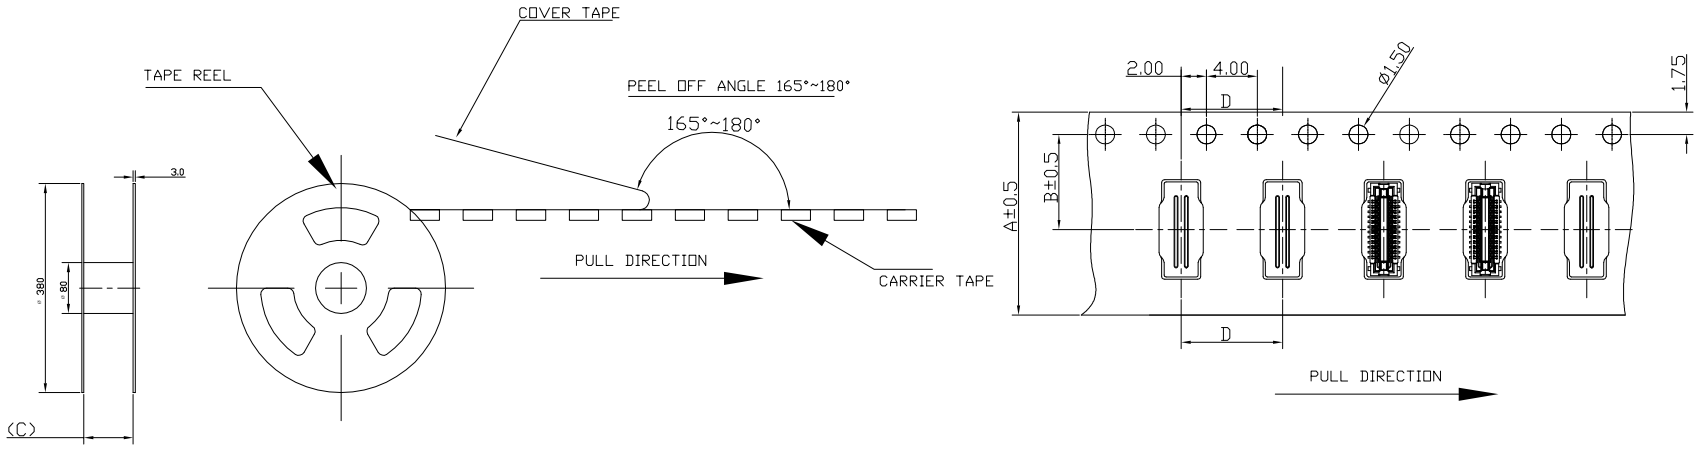


TABLE:

NUMBER OF CONTACTS	A	B	C	D	QTY/REEL
70	24.00	11.50	25.4	4.00	20000
50					
40					
34					
30	16.00	7.50	17.4		
24					
16					
14					
12					
10					

RoHS

DIMENTION IN mm		APPD:	TITLE: 0.4MM BTB (MATING HEIGHT 0.8H)					
TOLERANCE UNLESS OTHERWISE SPECIFIED		CHKD:	DWG NO: OK-14F***-04					
. ±0.20	. ±2°		PROJ	Q'TY	SIZE	SHEET	SCALE	REV
.0 ±0.10	.0 ±1°	DRA: George Gao 2013.09.18		--	A4	1/1	1:1	A
.00 ±0.05	.00±0.5°							
.000±0.03	.000±0.3							

OCN TECHNOLOGY