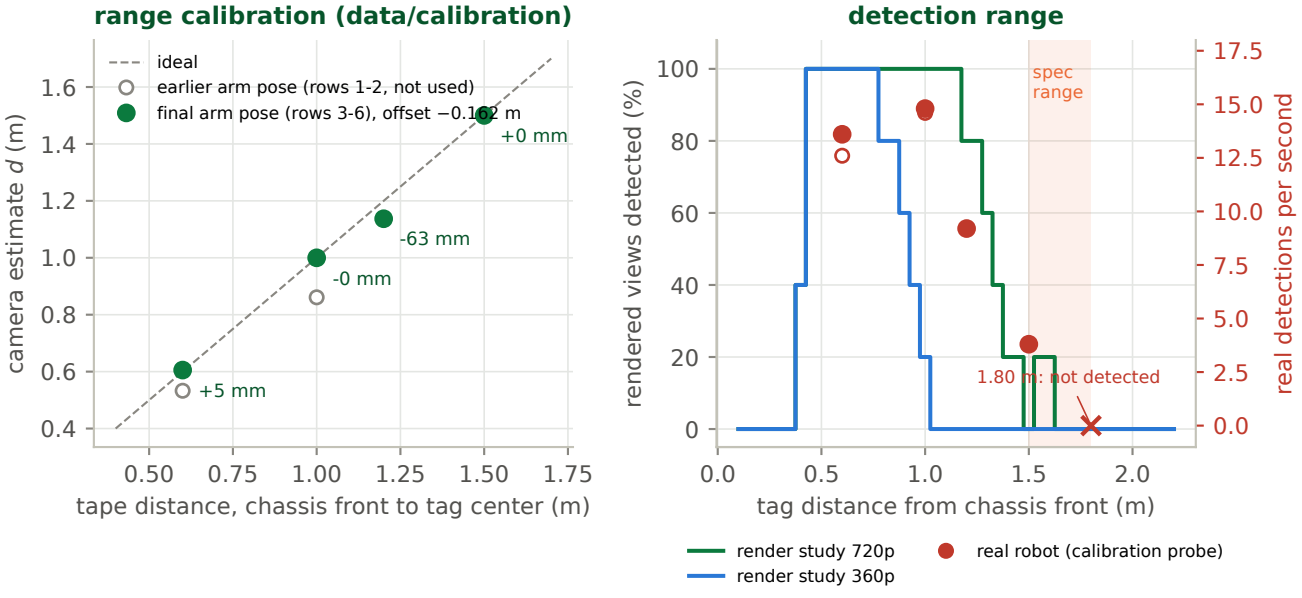
range calibration (data/calibration)
ideal
earlier arm pose (rows 1-2, not used)
final arm pose (rows 3-6), offset −0.162 m
+0 mm
-63 mm
-0 mm
+5 mm
camera estimate d (m)
tape distance, chassis front to tag center (m)
detection range
spec range
1.80 m: not detected
rendered views detected (%)
real detections per second
tag distance from chassis front (m)
render study 720p
render study 360p
real robot (calibration probe)