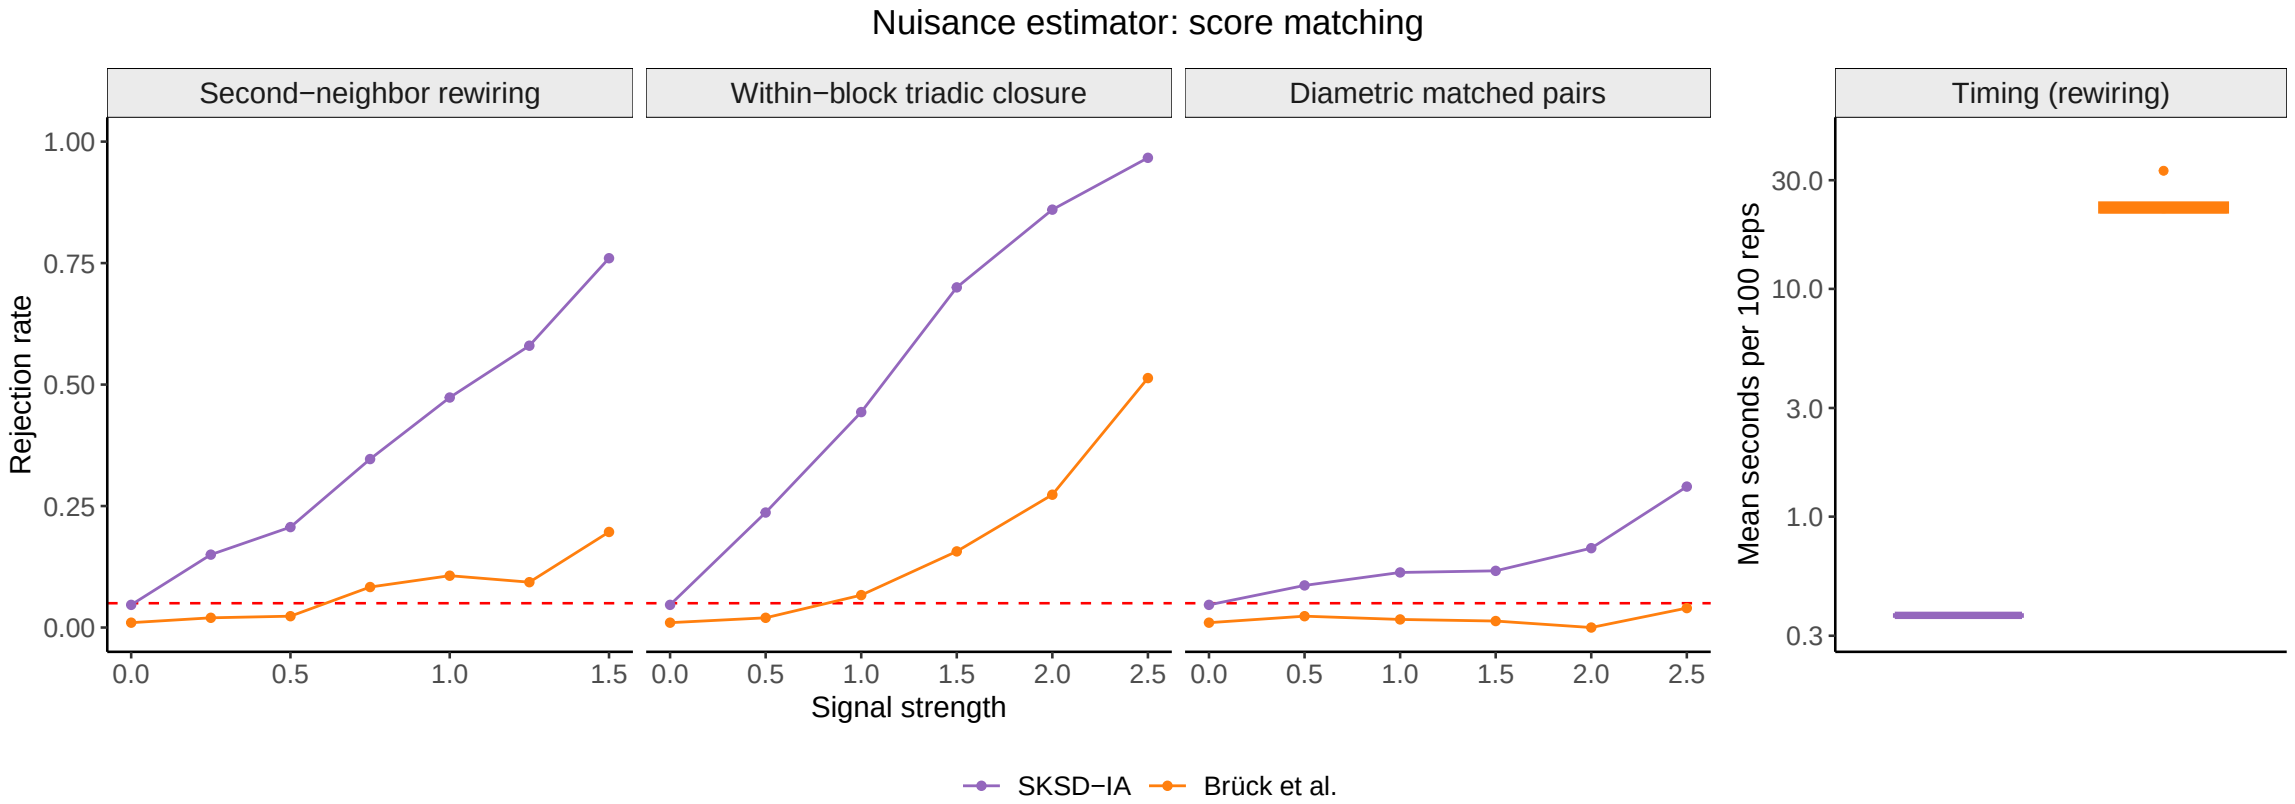
Nuisance estimator: score matching
Second−neighbor rewiring
Within−block triadic closure
Diametric matched pairs
Timing (rewiring)
Rejection rate
1.00
0.75
0.50
0.25
0.00
0.0
0.5
1.0
1.5
2.0
2.5
Signal strength
Mean seconds per 100 reps
30.0
10.0
3.0
1.0
0.3
SKSD−IA
Brück et al.