

WHEELHOUSE POSTER

Ship's name Oil tanker (Dis.77100t) TRANSAS 2.31.51.0, Call sign N/A,
Gross tonnage N/A, Net tonnage N/A, Load Condition Full load, Displacement 77100 tons, Deadweight 67980 tons

DRAFTS IN PRESENT CONDITION	
Forward	12.5 m
Forward extreme	12.5 m
After	12.5 m
After extreme	12.5 m

STEERING PARTICULARS	
Type of rudder	Semisuspended
Maximum rudder angle	35 degrees
Hard-over to hard-over (1/2 pumps)	59 sec/30 sec
Neutral effect angle	0.87 degrees
Flanking Rudders	0

ANCHORS INFO	
Anchor(s) (No./types)	2 (PortBow / StbdBow)
No. of shackles	15 / 15
Max. rate of heaving, m/min	18 / 18
(1 shackle = 25 m / 13.7 fathoms)	

PROPULSION PARTICULARS			
Type of Main Engine	Low speed diesel	Number of propellers	1
No. of Main Engines	1	Propeller rotation	Right
Max. power per shaft	1 x 13610 kW	Propeller type	FPP
Astern power	56 % ahead	Min. RPM	30
Time limit astern	N/A	Emergency FAH to FAS	1.1 seconds

Engine Telegraph Table				
Engine Order	Speed, knots	Engine power, kW	RPM	Pitch ratio
"FSAH"	15	12280	109.2	0.75
"FAH"	13.8	9558	100.2	0.75
"HAH"	11	4908	80	0.75
"SAH"	8.2	2118	59.8	0.75
"DSAH"	5.5	681	40	0.75
"DSAS"	-2.7	598	-39.8	0.75
"SAS"	-4.1	2007	-60.6	0.75
"HAS"	-5.2	4429	-80.2	0.75
"FAS"	-5.9	6378	-90.5	0.75

THRUSTER EFFECT						
Thruster (s)	No. of units	Power (kW)	Time delay for full thrust(s)	Turning rate at zero speed(degrees/min)	Time delay to reverse full thrust(s)	Not effective above speed (knots)
Bow	N/A					
Stern	N/A					
Combined	N/A					



Auxiliary Steering Device(s): N/A

DRAFT INCREASE IN PRESENT CONDITION					
Squat effect				Heel effect	
Under keel clearance	Ship's speed	Bow squat	Stern squat	Heel angle	Draft increase
3m	14.41 knots	1.42 m	1.32 m	2 deg	0.5 m
	13.38 knots	1.14 m	1.08 m	4 deg	0.98 m
	10.89 knots	0.64 m	0.7 m	8 deg	1.87 m
2 m	14.44 knots	1.64 m	1.59 m	12 deg	2.69 m
	13.43 knots	1.33 m	1.24 m	16 deg	3.42 m

Deep Water

TURNING CIRCLES

Shallow Water*

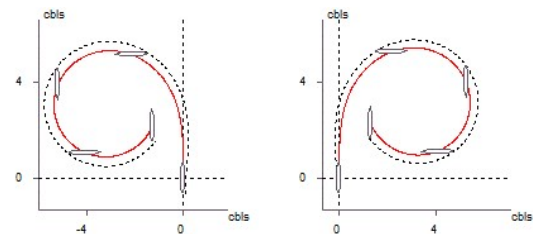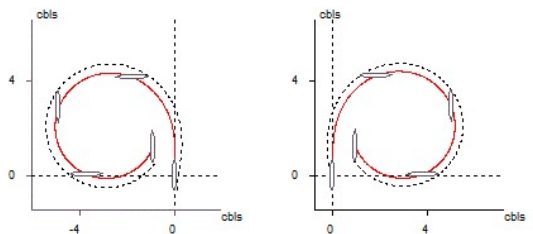


Eng.	Rudd.	Advance	Transfer	Tact. D	Final RoT	Final speed	Final time
100	35	4.24 cbls	1.87 cbls	4.98 cbls	27 deg/min	6 knots	715.6 s
100	-35	4.16 cbls	-1.83 cbls	-4.91 cbls	-27 deg/min	6 knots	711.6 s

Eng.	Rudd.	Advance	Transfer	Tact. D	Final RoT	Final speed	Final time
100	35	5.27 cbls	2.2 cbls	5.28 cbls	27 deg/min	6 knots	748.6 s
100	-35	5.15 cbls	-2.16 cbls	-5.19 cbls	-27 deg/min	6 knots	744.6 s

Emergency Manoeuvres(DW)

STOPPING CHARACTERISTICS


Emergency Manoeuvres(SW*)



Ship position marks every minute (if possible)
mins knots

Track Reach DW


Header struct:
[Track reach, cbls]
[Final time, min-s]
[Final speed, knots]
[Final course, deg]



No.	Rudd.	Eng.	Full time	Head reach	Side reach
1	35	100	322.6 s	2.95 cbls	4.98 cbls
2	-35	100	319.6 s	2.9 cbls	-4.91 cbls
3	35	-80	345.6 s	4.41 cbls	-4.02 cbls
4	-35	-80	329.6 s	4.5 cbls	4.02 cbls
5	0	-80	656.6 s	14.26 cbls	-8.08 cbls

Eng.	Rudd.	Full time	Head reach	Side reach
100	35	322.6 s	2.95 cbls	4.98 cbls
100	-35	319.6 s	2.9 cbls	-4.91 cbls
-80	35	345.6 s	4.41 cbls	-4.02 cbls
-80	-35	329.6 s	4.5 cbls	4.02 cbls
-80	0	656.6 s	14.26 cbls	-8.08 cbls

No.	Rudd.	Eng.	Full time	Head reach	Side reach
1	35	100	355.6 s	3.99 cbls	5.28 cbls
2	-35	100	351.6 s	3.89 cbls	-5.19 cbls
3	35	-80	368.6 s	5.45 cbls	-4.19 cbls
4	-35	-80	353.6 s	5.59 cbls	4.17 cbls
5	0	-80	646.6 s	17.41 cbls	-0.76 cbls

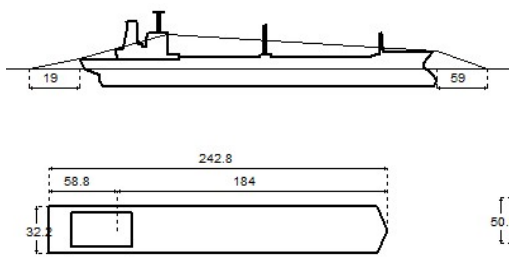

Bridge To Stern(A)	58.8 m	Length of Midbody(D)	182.1 m	Air Draft(G)	50.47 m / 166 ft 0 in
Bridge To Bow(B)	184 m	Length Overall(E)	242.8 m	Forward Blind Zone(I)	59 m
Breadth(C)	32.2 m	Height(F)	62.97 m	Backward Blind Zone(J)	19 m

* Shallow Water: depth is equal 2 Draft

** Model: 2.166.1432.129; VSY02: 2.91.3084.0;

PERFORMANCE MAY DIFFER FROM THIS RECORD DUE TO ENVIRONMENT, HULL AND LOADING CONDITION

MAN OVERBOARD RESCUE MANOEUVRE	
SEQUENCE OF ACTION TO BE TAKEN:	
- TO CAST A BUOY - TO GIVE THE HELM ORDER - TO SOUND THE ALARM - TO KEEP THE LOOK OUT	
Approximate Maneuver Program	
Time	Action
0 s	Set rudder 35 STBD. Wait till ship course altered to 45.5 degrees from initial.
74 s	Set rudder 35 PORT. Wait till course altered to -170 degrees from initial.
563 s	Turn AP on. The difference between AP course and initial course must be 180 degrees.